

Service
Service
Service

KTS17.2E
LA



Service Manual

Chassis name	Platform	Model name
KTS17.2E LA	MSD3463	32PHT4012/05

1.Product inforamtion	3
2.Connections overview	5
3.Mechanical Instructions	6
Cable dressing (32" 32PHT4012/05)	6
Assembly/Panel Removal	6
4.Factory Modes	9
5.Software upgrading and Panel Code	11
6.Circuit Descriptions	13
7.IC Data Sheet	19
8.Circuit Diagrams	22
9.Styling Sheet	32
32" 4012 series	32

1. Product information

Product information is subject to change without notice.

For detailed product information, please visit www.philips.com/support

Display

Type

Diagonal screen size

- 32PHT4012/05: 32inch

Display resolution

- 1920*1080p

Input resolution

- 800 x 600p - 60 Hz
- 1024 x 768p - 60 Hz
- 1280 x 768p - 60 Hz
- 1360 x 765p - 60 Hz
- 1360 x 768p - 60 Hz
- 1280 x 1024p - 60 Hz
- 1920 x 1080p - 60 Hz23.5

Video formats

Resolution — Refresh rate

- 480i, 480p,576i, 576p,720p,1080i,1080p(24/25/30/50/60Hz)

Computer formats

Resolutions (amongst others)

- 720*400@70HZ
- 640*480@60HZ
- 800*600@60HZ
- 1024*768@60HZ
- 1360*768@60HZ
- 1280*720@60HZ
- 1280*960@60HZ
- 1280*1024@60HZ
- 1600*900@60HZ
- 1920*1080@60HZ

Dimensions and Weights

32PHT4012/05

- Without TV stand:

Width 732 mm - Height 432 mm - Depth 76 mm - Weight 3.9 kg

- with TV stand:

Width 732 mm - Height 492 mm - Depth 183 mm - Weight 4 kg

Width 969 mm - Height 625 mm - Depth 226 mm - Weight 7.5 kg

Connectivity

TV Side

- HDMI 1 in
- VGA x 1
- VGA Audio-out
- AV_in Audio L/R

TV Rear

- CVBS/Y Pb Pr : CVBS/Y Pb Pr,
- CI port x 1
- Optical port x 1
- HDMI 2 in
- HDMI 3 in- MHL
- Headphone x 1
- USB x 1

Sound

Output Power (10% THD) RMS	16W
Speaker configuration	8W+8W
Speaker system	2.0
Speaker type	built-in(normal)
Auto Volume Levelier / Auto Volume Levelier +	YES
Dolby Digital DecoderType	YES

Multimedia

Connections

- USB 2.0
-

Music Playback Formats	MPEG-1,MPEG-2 (Layer I/II) MP3, AAC-LC, HE-AAC
------------------------	---

Picture Playback Formats	JPEG、BMP、PNG
--------------------------	--------------


Power

Product specifications are subject to change without notice. For more specification details of this product, see www.philips.com/support

Power

- Mains power : AC 111-212V 50/60Hz
- Standby Energy Consumption:≤0.5W
- Ambient temperature : 5°C to 40°C


2. Connections Overview

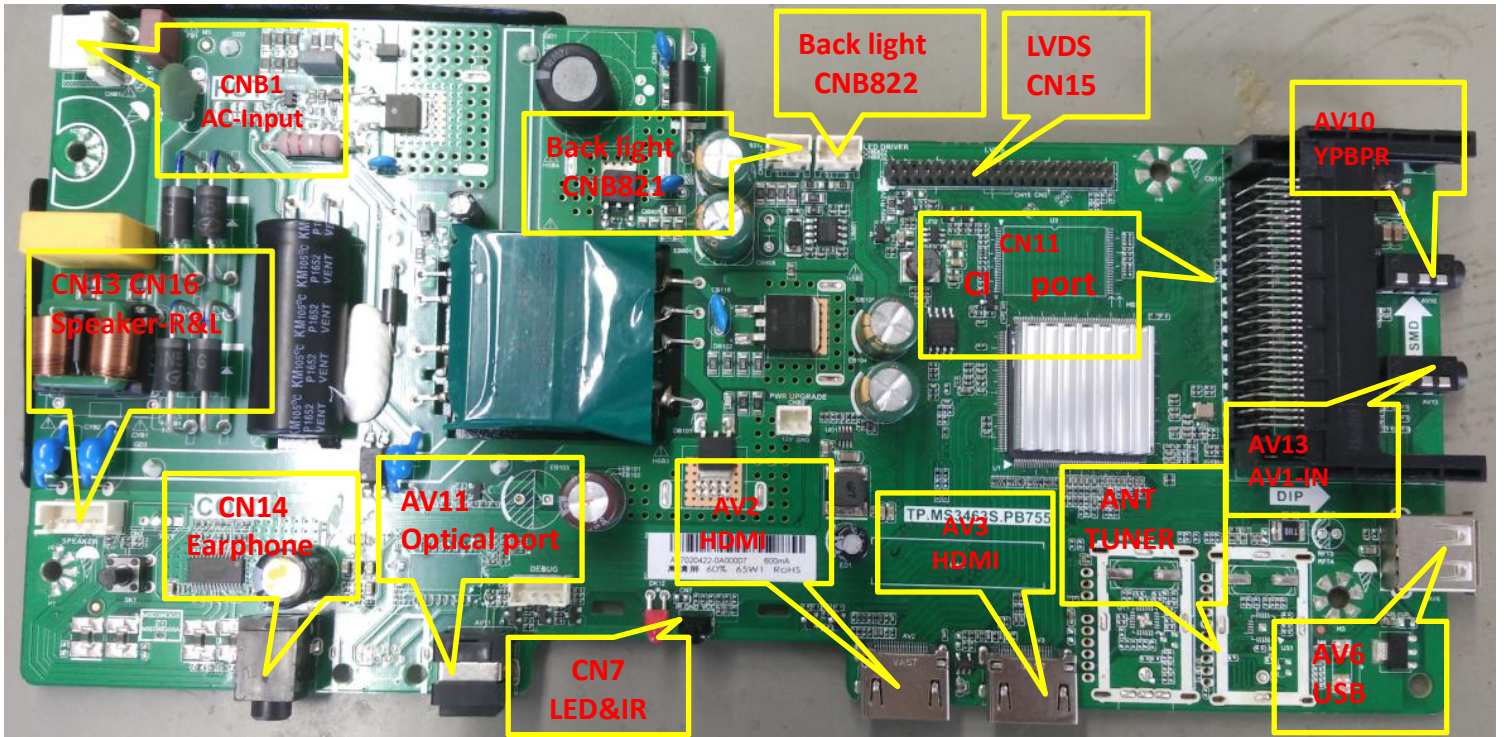

For(32" 32PHT4012/05)

3. Mechanical Instructions

3.1 Cable dressing

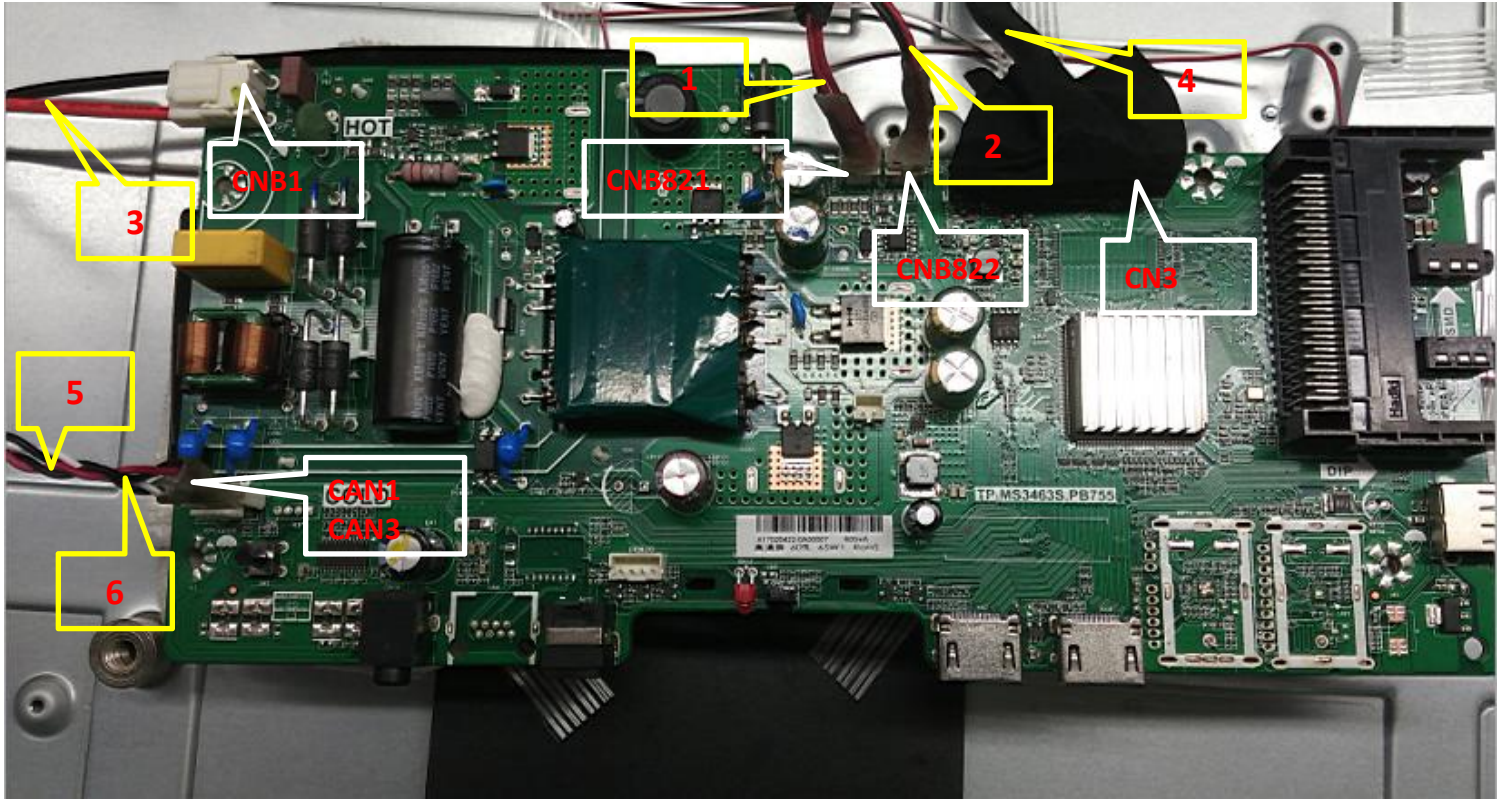

Serial no	part description	function
1	Backlight wire	Connect to CNB821
2	Backlight wire	Connect to CNB822
3	Power wire	Connect to CNB1
4	LVDS wire	CN3 to T-CON board
5	Speaker wire	CAN1 to speaker (yellow black wire)
6	Speaker wire	CAN3 to speaker (red black wire)

For(32"32PHT4012/05)

3.2 Assembly/Panel Removal

3.2.1 Stand removal

1. Remove the fixation screws [1] 4pcs ,that secure the stand
2. Take the stand bracket out from the set.




3.2.2 IR board & key board

1. Unplug the connector from the SSB.

Caution: be careful, as these are very fragile connectors!

2. Remove all the fixation screws(5) ,from the IR board control unit. then Remove the fixation screws(6), the IR board control unit. When defective, replace the whole unit

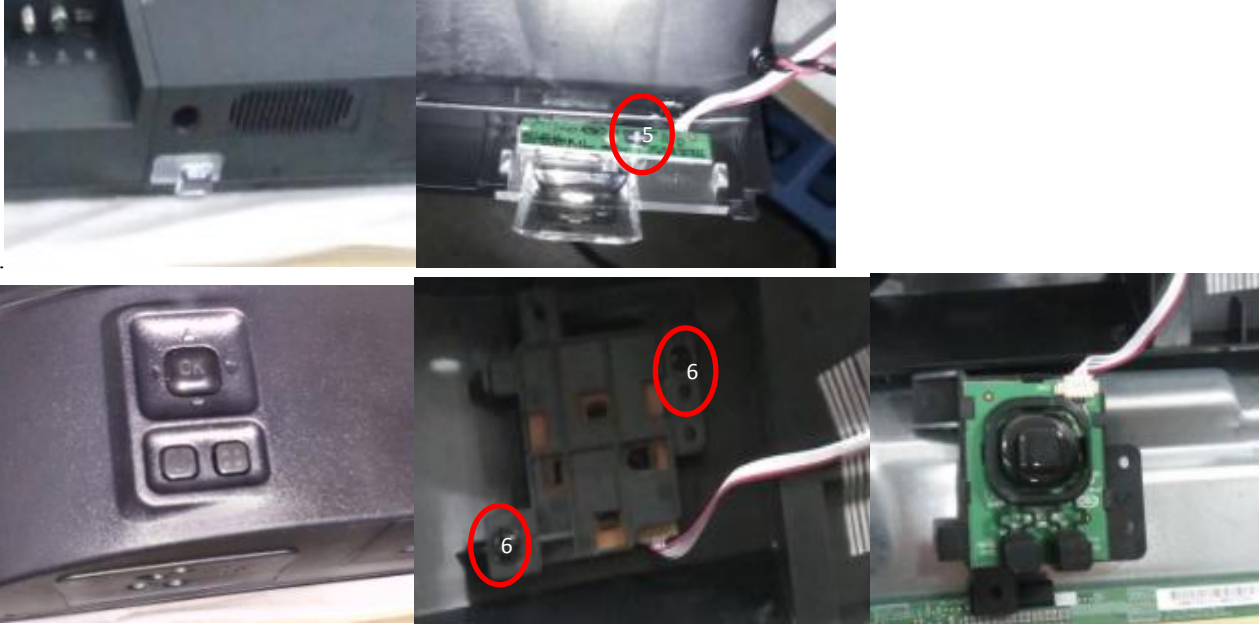

3.2.3 Rear Cover

Warning: Disconnect the mains power cord before removing the rear cover.

1. Remove fixation screws [2] [3] and [4] that secure the back cover..
2. Gently lift the rear cover from the TV. Make sure that wires and cables are not damaged while lifting the rear cover from the set.
3. Remove fixation screws[2] [3] and [4] that secure the back cover.unplug connectors



3.2.4 Power Supply Unit (PSU)

Caution: it is mandatory to remount all different screws at their original position during re-assembly. Failure to do so may result in damaging the PSU.

1. Gently unplug all connectors from the PSU.
1. Remove all fixation screws from the PSU.
3. The PSU can be taken out of the set now.

3.2.5 Speakers

1. Gently release the tapes that secure the speaker cables.
2. Unplug the speaker connector from the SSB.
3. Take the speakers out.

When defective, replace the both units.

3.2. LCD Panel

3. Remove the SSB as described earlier.
2. Remove the PSU as described earlier.
3. Remove the keyboard control panel as described earlier.
4. Remove the stand bracket as described earlier.
5. Remove the IR/LED as described earlier.
6. Remove the fixations screws that fix the metal clamps to the front bezel. Take out those clamps.
7. Remove all other metal parts not belonging to the panel.
8. Lift the LCD Panel from the bezel.

When defective, replace the whole unit.

4. Service Modes

Factory Mode

Purpose

- To perform extended alignments.

Primary menu	Secondary menu	Value,remark
ADC ADJUST	MDOE	VGA, YPBPR, Selection
	R-GAIN	Front-end gain adjustment
	G-GAIN	
	B-GAIN	
	R-OFFSET	
	G-OFFSET	Clamp level adjustment
	B-OFFSET	
	AUTO ADC	
PICTURE MODE	Input Source	Source Selection
	MODE	Dynamic/Standard/Soft/User
	BRIGHTNESS	BRIGHTNESS
	CONTRAST	CONTRAST
	COLOR	COLOR
	SHARPNESS	SHARPNESS
	TINT	TINT
	Copy all	No function
W/B ADJUST	Input source	Source Selection
	TEMPERATURE	Cool, Standard, Warm
	R-GAIN	White level adjustment
	G-GAIN	
	B-GAIN	
	R-OFFSET	Black level adjustment
	G-OFFSET	
	B-OFFSET	
Copy all	No function	
SSC SETTING	MIU Enable	DDR spectrum enable
	MIU0 Span	Exhibition frequently wide
	MIU Step	Spread spectrum step
	LVDS enable	LVDS spectrum enable
	LVDS Span	Exhibition frequently wide
	LVDS Step	Spread spectrum step
	LVDS swing	LVDS swing
Special set	2HOUR OFF	2hours power off enable
	WDT	Watch dog on/off
	White pattern	White pattern selection
	Restore user default	Factory reset
	PVR_RECORDALL	PVR Record on/off
	Power	Power mode selection
	Mirror	Mirror function selection
	Ageing mode	Ageing mode enable
	VIF	Vif 1
Vif 2		Vif set
Vif 3		Vif set
Qmap adjsut	PQ setting	
PEQ	PEQsetting	
OverScan	Overscan resolution	Reselution select
	Overscan hsize	Adjust overscan H size
	Overscan hposition	Adjust overscan H position
	Overscan vsize	Adjust overscan V size
	Overscan vposition	Adjust overscal V position
other	Test pattern	
	UART DEBUG	DEBUG ON/OFF
	HDMI CEC/ARC	CEC/ARC ON/OFF


	Backlight	Adjust backlight
CI+ key usb upgrade	CI+ key usb upgrade	
SW information	SW information	
Non-linear	MODE	Feature Selection
	OSD 0	Curve adjustment
	OSD 25	
	OSD 50	
	OSD 75	
	OSD 100	
Channel table1	KTC factory Frequecy table set	
CI factory setting	No function	
Channel table2	KTC factory Frequecy table set	
Channel dvbt	KTC factory Frequecy table set	

5. Software upgrading and Panel Code


5.1 Software Upgrading

Operations and procedure of software upgrading:

- 1). Changed the file name to "MERGE.bin", then stored software in the FAT32 format blank U disk.
- 2). Insert USB flash disk into the USB upgrade port, upgrade the software according to the following the operating instructions:
Select AIR or DTV signal source, press Menu key to pop up the main menu, then choose.

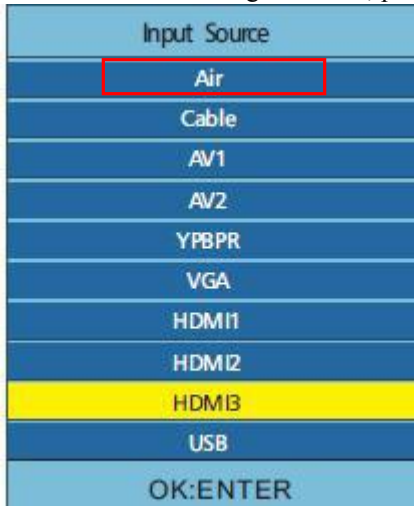


Select Software Update(USB), press right key or OK key to enter.

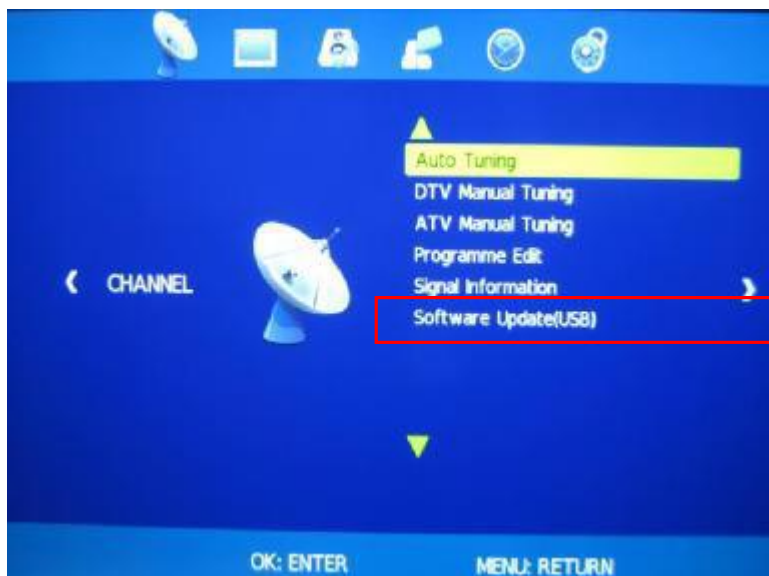

Software update menu will pop up when press confirm key, then select “Yes” to confirm:



The process of software updating:

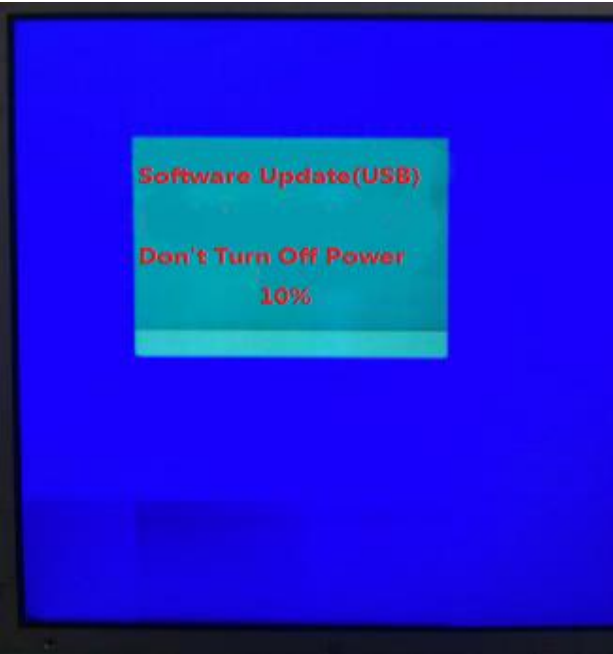

Method 2 : Keep pressing VOL+ and CH+ keys on the machine panel, power on the machine, the standby light flashes quickly after about 5 seconds, standby light extinguish and turn into lighting after about a minute, means that the upgrade is completed.

5.1.4 Notice :

- ①. When the machine Upgrading (U disk light flash), do not remove U disk or switch off the power, otherwise it will destroy the software and lead can not upgrade.
- ②. The machine must be power off when inserted or pulled out U disk, to avoid U disk or damage the machine.

5.2 Panel Code

Press the following key sequence on a standard RC transmitter: “1999” directly followed by MENU, can see the panel type information from factory menu, see the Panel PN from the configuration table

CTN_ALT BOM#	Panel Type	Panel PN
32PHT4012/05	K320WDK3B-LW330A2	7422320LGK3AK011-F

6. Circuit Descriptions

6.1 Introduction


The 4012 is covered by MSD3463 platform. The major deltas versus its predecessor support DVB-T, with also multi-media, Video out. The MSD3463 chassis comes with the following stylings:

- Series 4012 32PHT4012/05

6.1.1 Implementation


Key components of this chassis are:

- TUNER POWER AS1117
- VDDC POWER
- MSD3463
- DDR POWER 1.5V
- 3.3V STANDBY AS1117
- 64 Mbit SPI FLASH
- HDMI1 ARC
- HDMI2 PORT
- HDMI3 MHL

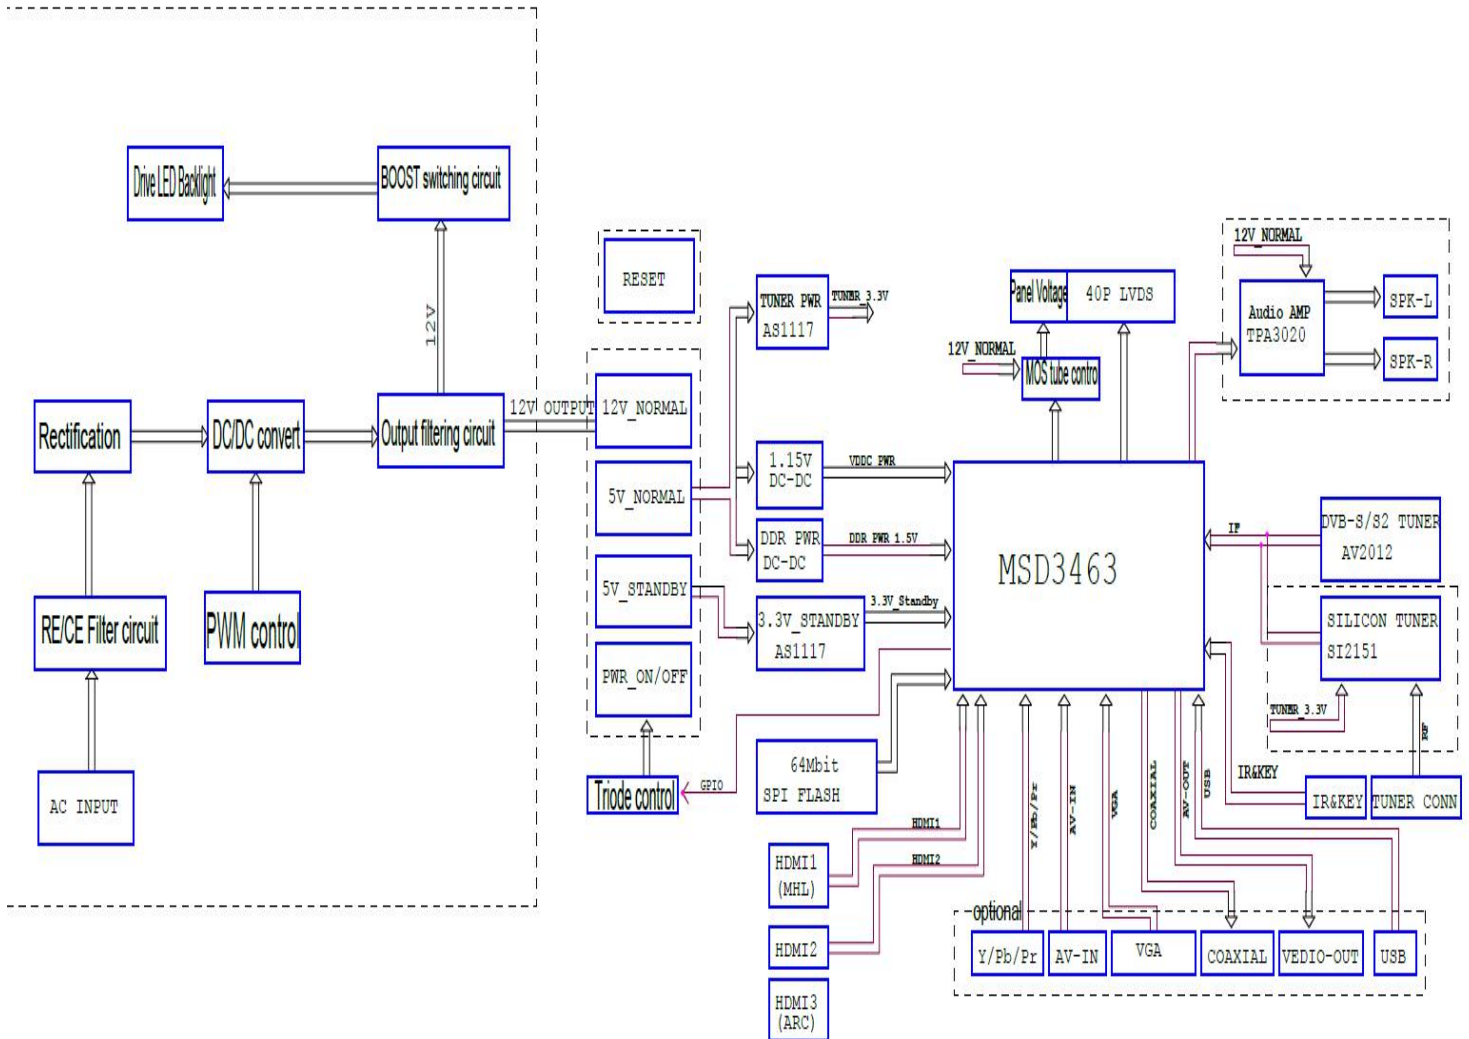

6.2 Power Supply

Power architecture of this platform.

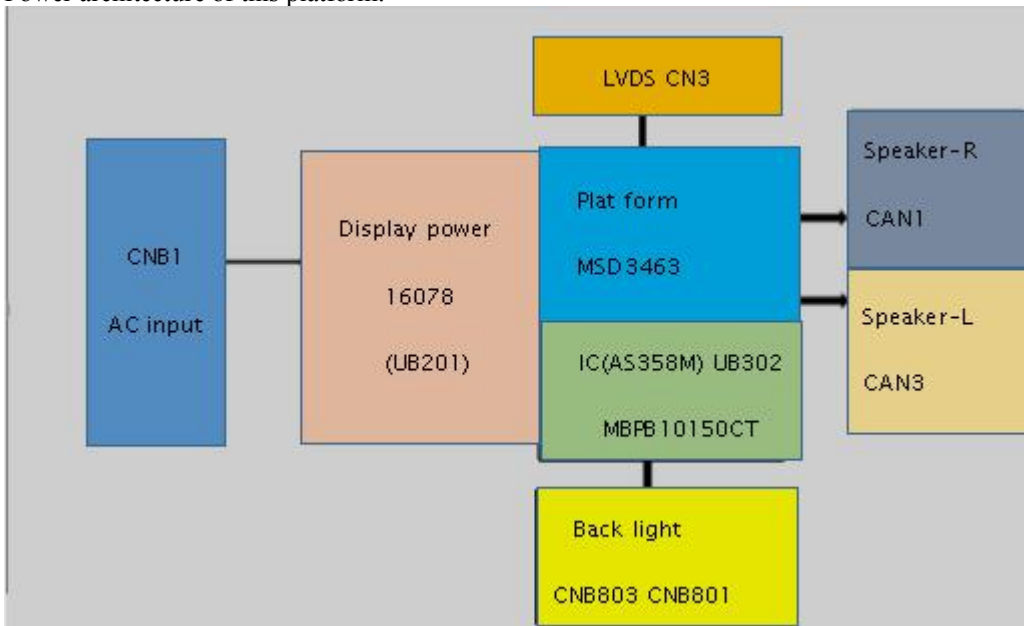

6.2.1 Power Supply Unit

All power supplies are a black box for Service. When defective, a new board must be ordered and the defective one must be returned, unless the main fuse of the board is broken. Always replace a defective fuse with one with the correct specifications! This part is available in the regular market.

Consult the Philips Service web portal for the order codes of the boards.

Important delta's with the platform are:

- New power architecture for LED backlight
- “Boost”-signal is now a PWM-signal + continuous variable

The control signals are:

- PS-ON
- Lamp “on/off”
- DIM (PWM) (not for PSDL)

In this manual, no detailed information is available because of design protection issues.

- +12 output (on-mode)
- +12V_audio (audio AMP power)
- Output to the display; in case of
 - IPB: High voltage to the LCD panel
 - PSL and PSLs (LED-driver outputs)
 - PSDL (high frequent) AC-current.

6.2.2 Diversity

The diversity in power supply units is mainly determined by the diversity in displays.

The following displays can be distinguished:

- CCFL/EEFL backlight: power panel is conventional IPB
- LED backlight:
 - side-view LED without scanning: PSL power panel
 - side-view LED with scanning: PSLs power panel
 - direct-view LED without 2D-dimming: PSL power panel
 - direct-view LED with 2D-dimming: PSDL power panel.

PSL stands for **P**ower **S**upply with integrated **L**ED-drivers.

PSLs stands for a **P**ower **S**upply with integrated **L**ED-drivers with added **S**canning functionality (added microcontroller).

PSDL stands for a **P**ower **S**upply for **D**irect-view **L**ED backlight with **2D**-dimming.


6.3 DC/DC Converters

The on-board DC/DC converters deliver the following voltages (depending on set execution):


- +3V5-SB, permanent voltage for the Stand-by Power system
- +3V3-STANDBY, voltage for IR/Key board
- +12V, input from the power supply for the panel common (active mode)

- +12V, input from the power supply for LNB supply
- +3V3-FLASH, voltage for FLASH when TV on
- +3.3VA_T2, +1.2V_T2 voltage for Demodulator IC channel decoder
- TUNER_3V3, supply voltage for tuner
- +5V-SW, input intermediate supply voltage for USB Power
- +12V-AUDIO1 for the AUDIO AMP
- +1.5V-Main chip

6.3.1 Power tree

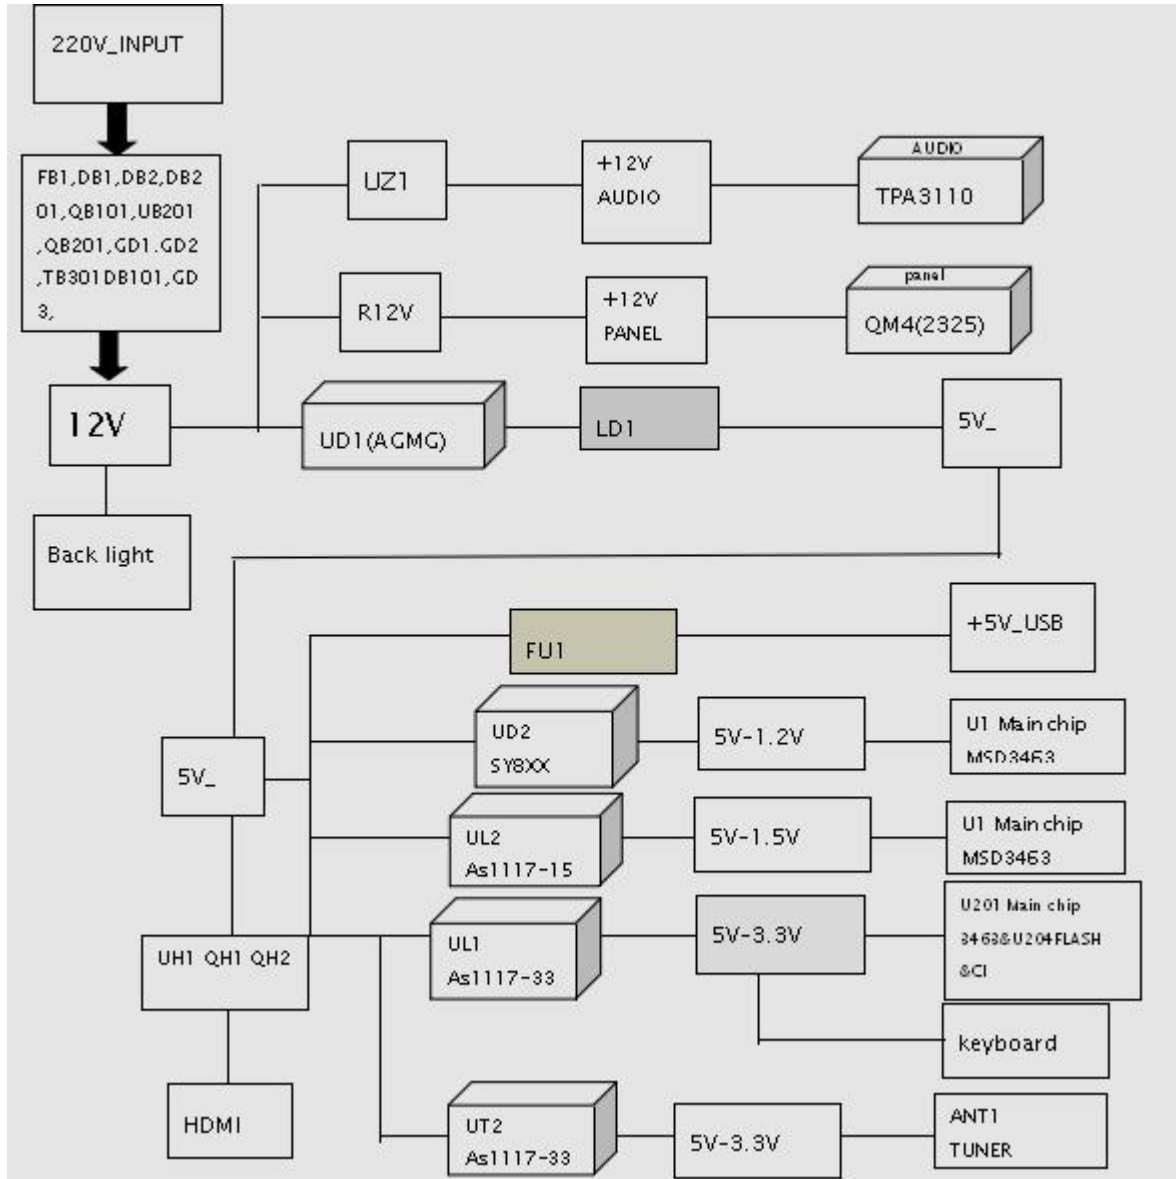

6.3.2 Power layout SSB

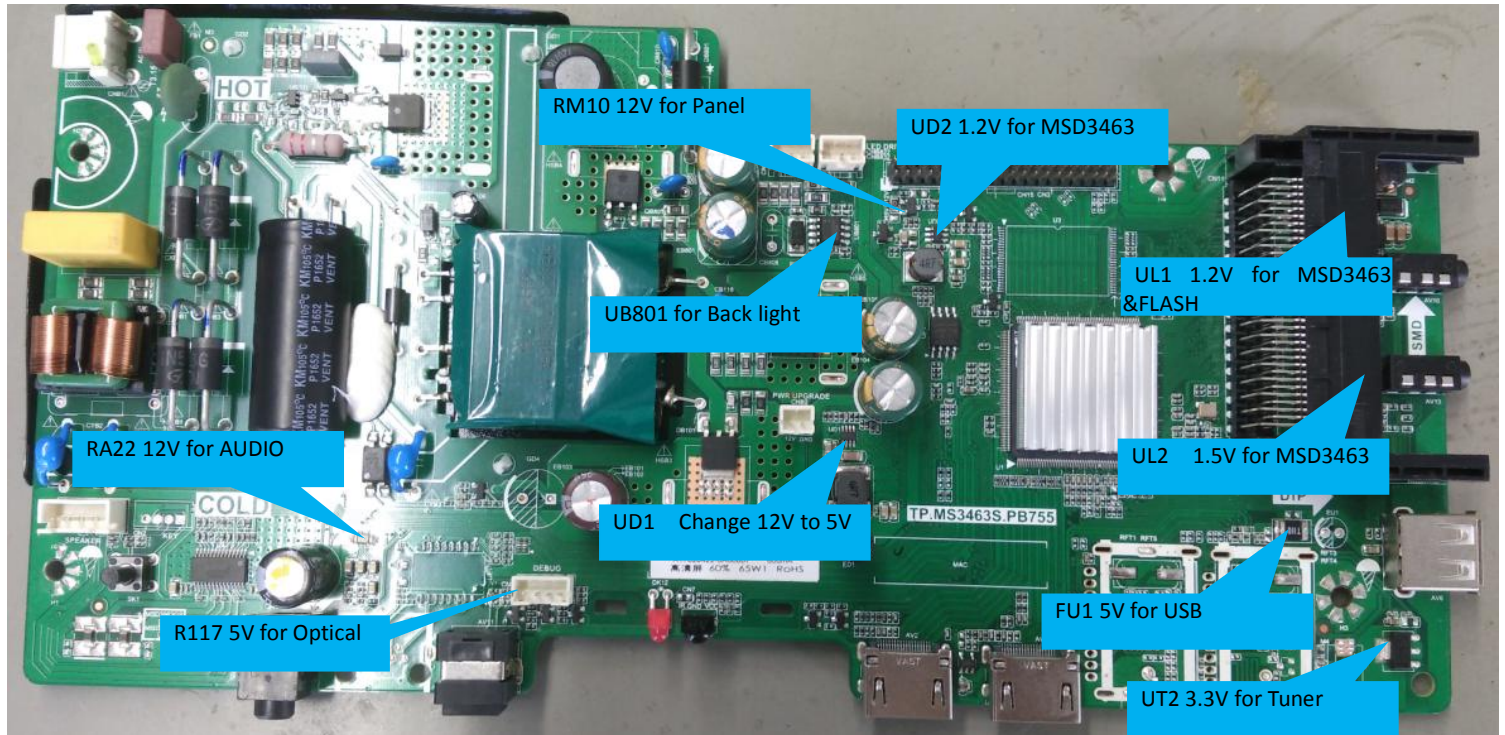

For(32" 32PHT4012/05)

6.4 Front-End Analogue and DVB-C, DVB-T; reception


6.4.1 DVB-C part

The Front-End for analogue tuner consist of the following key components:

- TUNER EARDATEK
- SCALER MSD3463

Below find a block diagram of the front-end application for DVB-C part.EARDATEK+MSD3463

EARDATEK

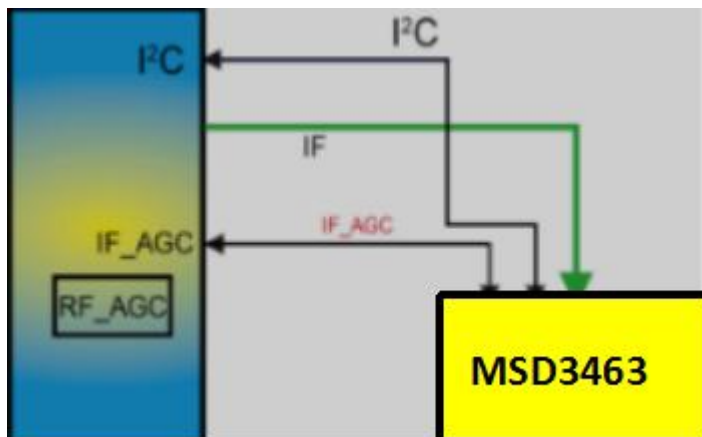


6.4.2 DTB-T2 part

The Front-End for DVT part consist of the following key components:

- TUNER EUROPE EARDATEK


Below find a block diagram of the front-end application for DTV part.

EARDATEK

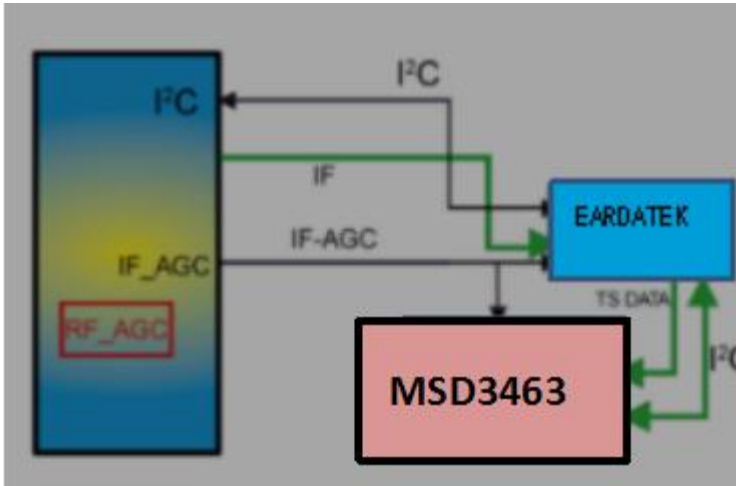

6.5 HDMI

Refer to below for the application.

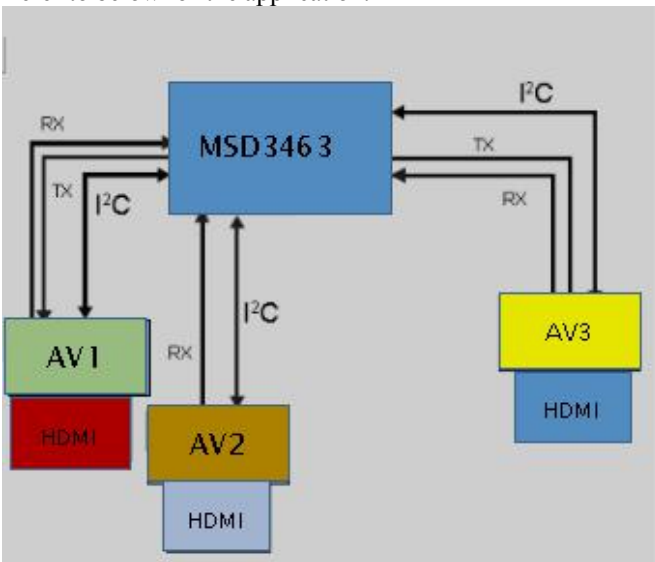

The following HDMI connector can be used:

- HDMI 1: HDMI input (TV digital interface support HDCP)
- HDMI 2: HDM IMHL input (TV digital interface support)
- HDMI 3: HDMI input (TV digital interface support HDCP)
- +5V detection mechanism
- Stable clock detection mechanism
- HPD control
- Sync detection
- TMDS output control
- CEC control
- ARC control
- MHL control

6.6 Video and Audio Processing - MSD3463

The MSD3463 is the main audio and video processor (or System-on-Chip) for this platform. It has the following features:

1. Worldwide multi-standard analog TV demodulator
2. PAL/SECAM/DVB-T/DVB-T2 /DVB-C demodulators
3. 1920*1080@60Hz direct drive
4. Powerful CPU core
5. A transport de-multiplexer
7. A multi-standard video decoder
8. Rich format audio codec
10. HDMI 1.3 receiver
11. MHL input
12. 2D converter
14. PWM dimming (LED backlight)
15. Two-link LVDS,

1 OVERVIEW

The MediaTek MSD3463 family consists of a DTV front-end demodulator, a backend decoder and a TV controller and offers high integration for advanced applications. It integrates a transport de-multiplexer, a high definition video decoder, an audio decoder, a -link LVDS transmitter, and a NTSC/PAL/SECAM TV decoder. The MSD3463 enables consumer electronics manufacturers to build high quality, low cost and feature-rich DTV.

World-Leading Audio/Video Technology: The MSD3463 supports Full MPEG2/4/H.264 video decoder standards, and JPEG. The MSD3463 also supports MediaTek MDDiTM de-interlace solution which can reach very smooth picture quality for motions.

The special color processing technology provides a natural, deep colors and true studio quality video. Moreover, the MSD3463 family has built-in high resolution and high-quality audio codec.

Rich Features for High Value Products: The MSD3463 family enables true single-chip experience. It integrates high-quality HDMI 1.4, high speed VGA ADC, a-link LVDS, USB 2.0 receiver, and ATSC/DVB-T/DVBC/DTMB/ISDB-T demodulators.


All New FHD@60Hz Experience: The MSD3463 family provides consumers with FHD 60Hz direct drive.

WW Common Platform Capability: The MSD3463 family supports ATSC, DVB-T, DVB-C, and ISDB-T demodulation functions. It reserves transport stream inputs for external demodulators for other countries or areas. TV maker can easily port the same UI to worldwide TV models. First-class adjacent and co-channel rejection capability grants excellent reception. Professional error-concealment provides stable, smooth and mosaic-free video quality.


7. IC Data Sheets

7.1 0B6220


PWP (TSSOP) PACKAGE
(TOP VIEW)

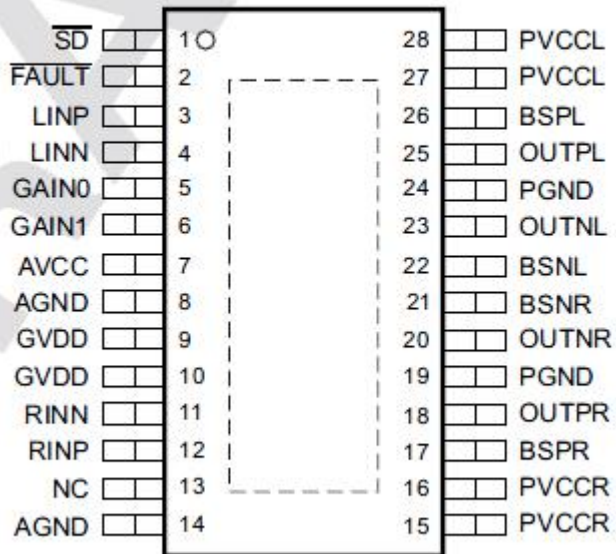


FUNCTIONAL BLOCK DIAGRAM

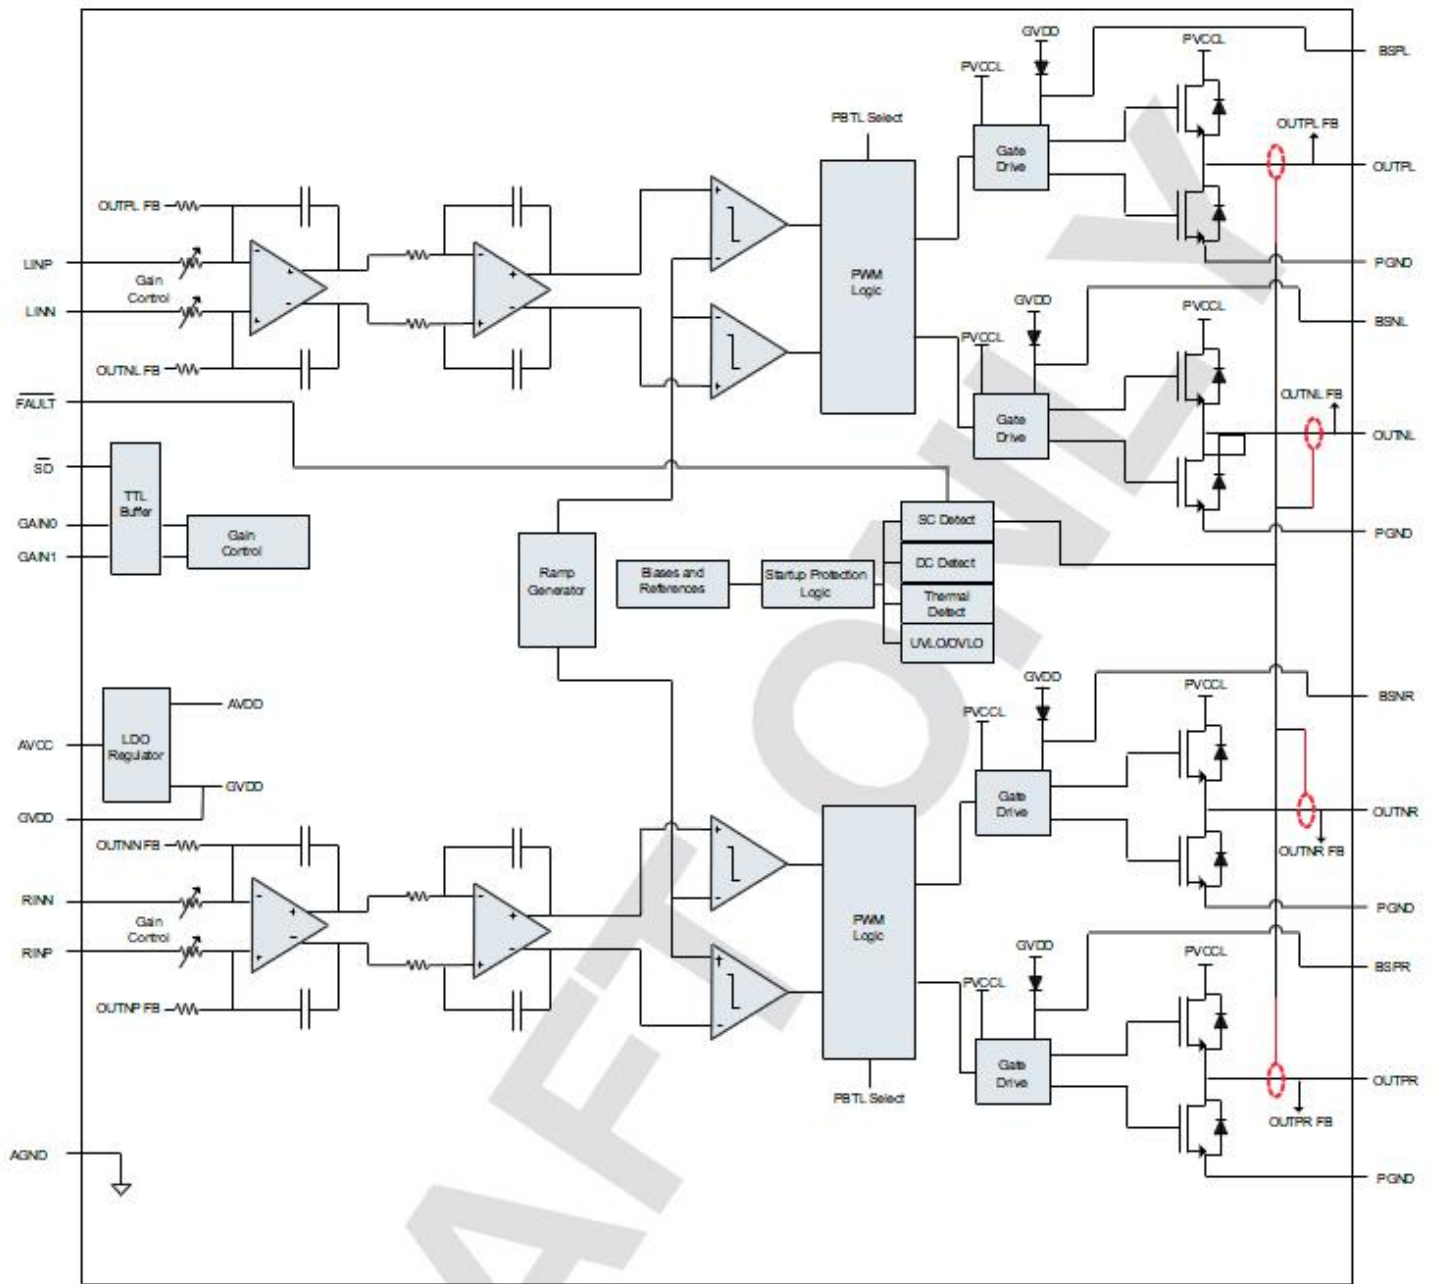







7.2 SY800XX







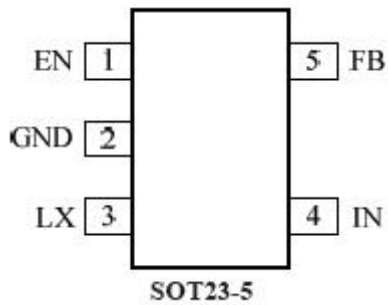



Block Diagram

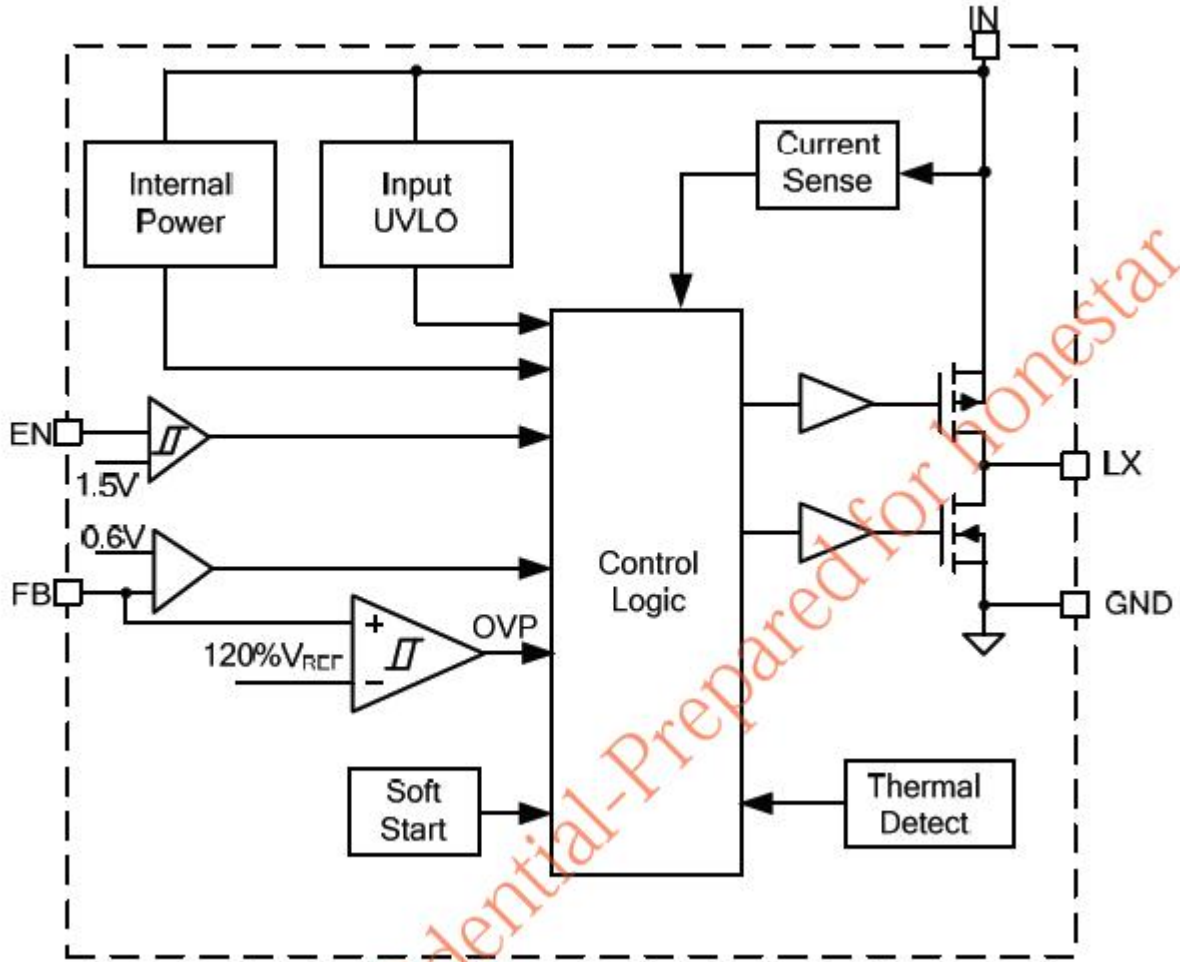















8. Circuit Diagrams

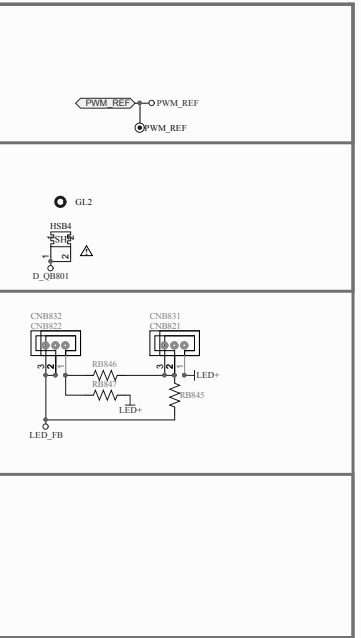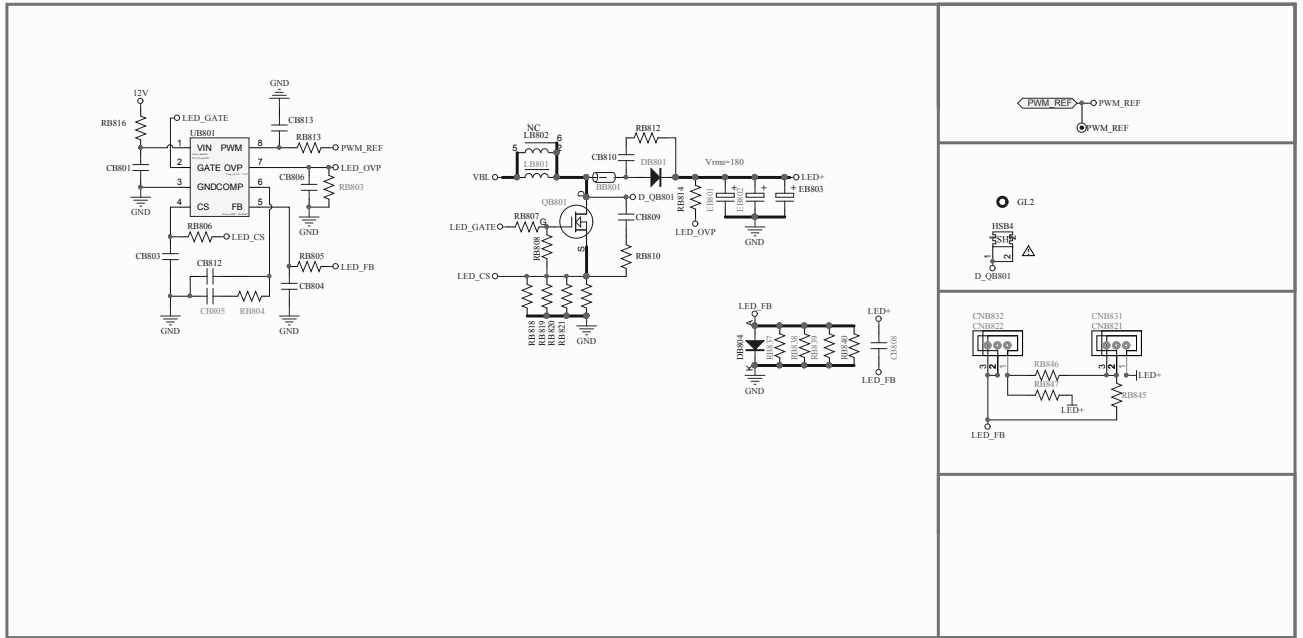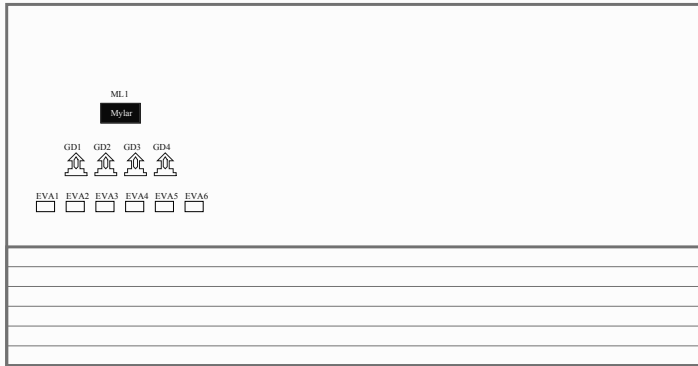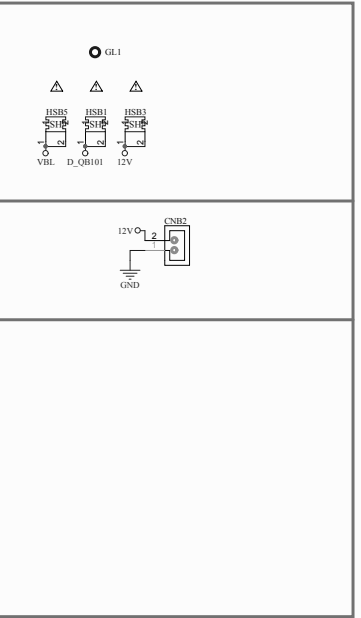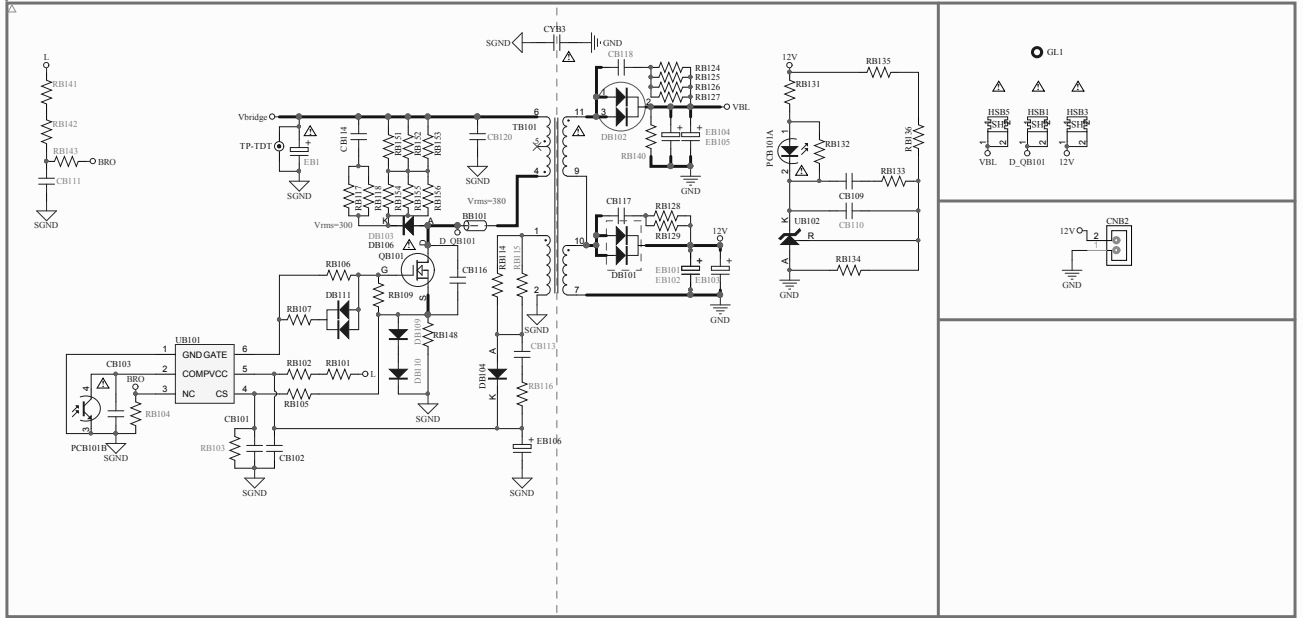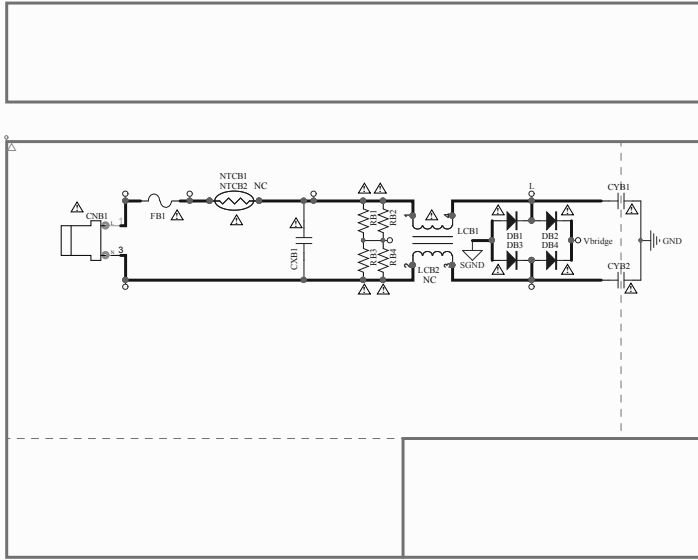

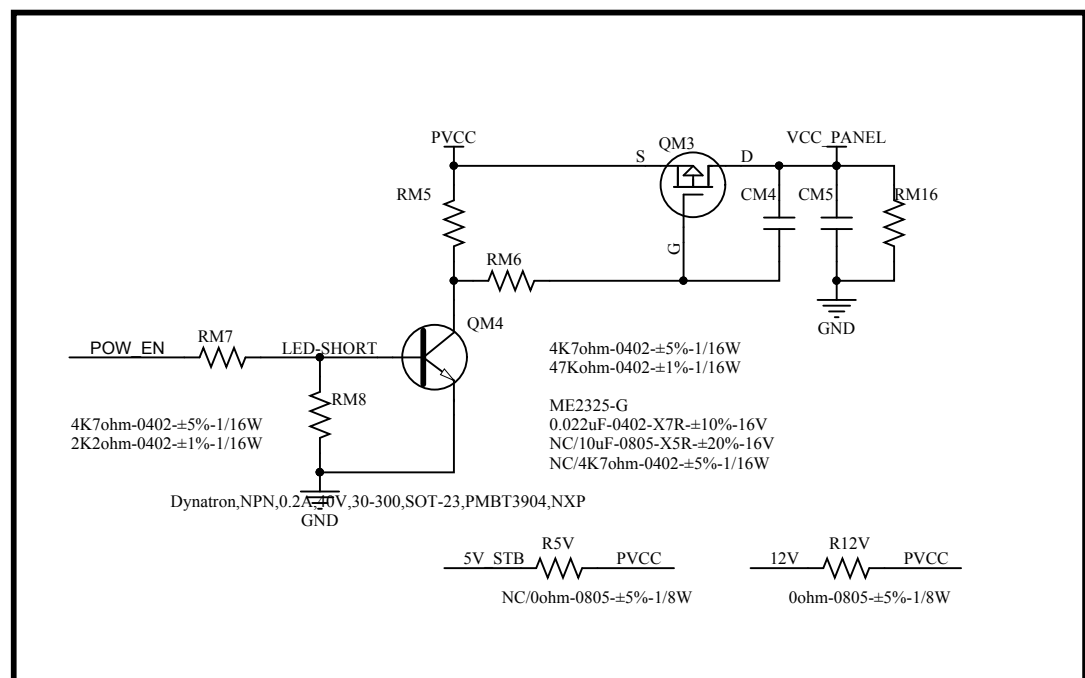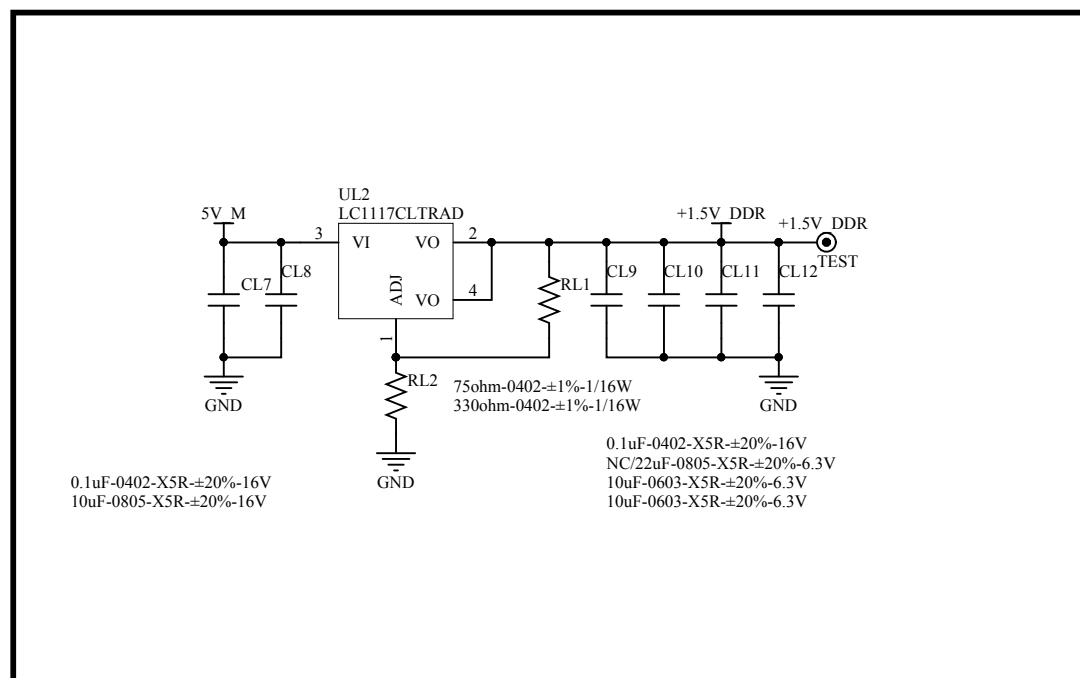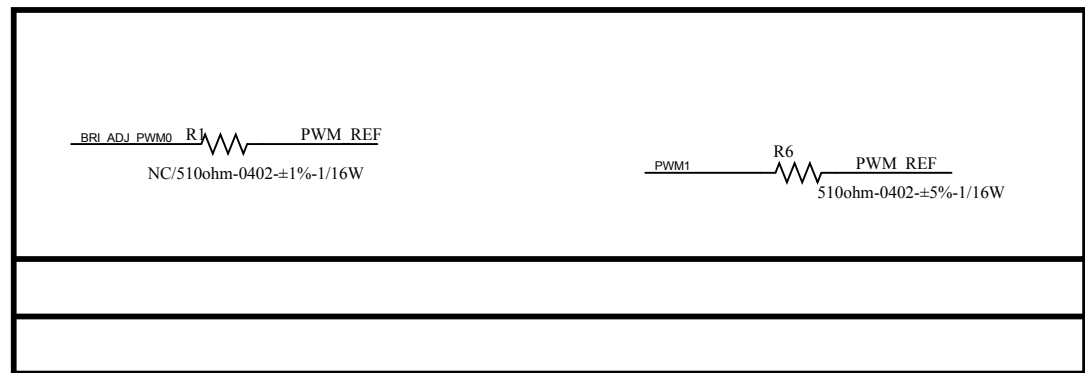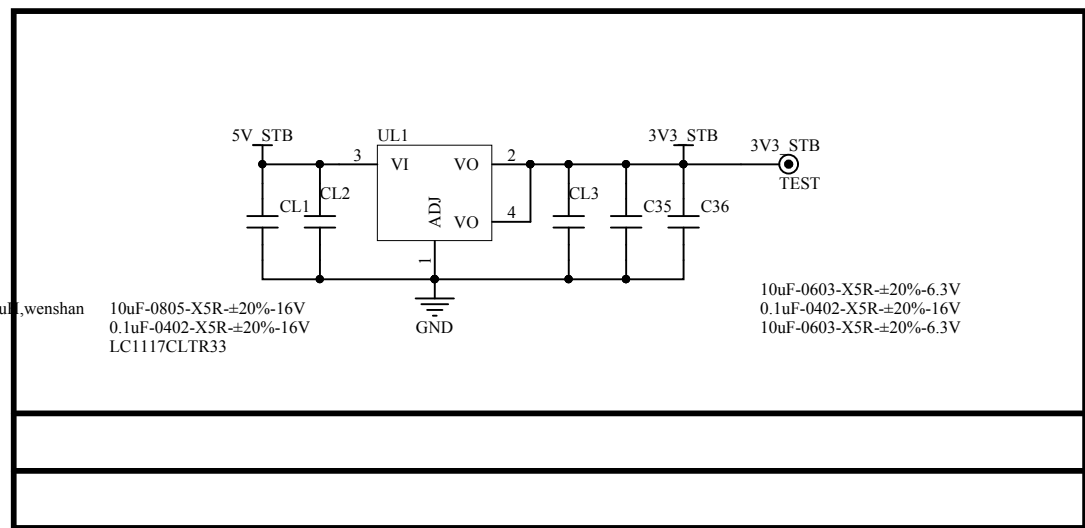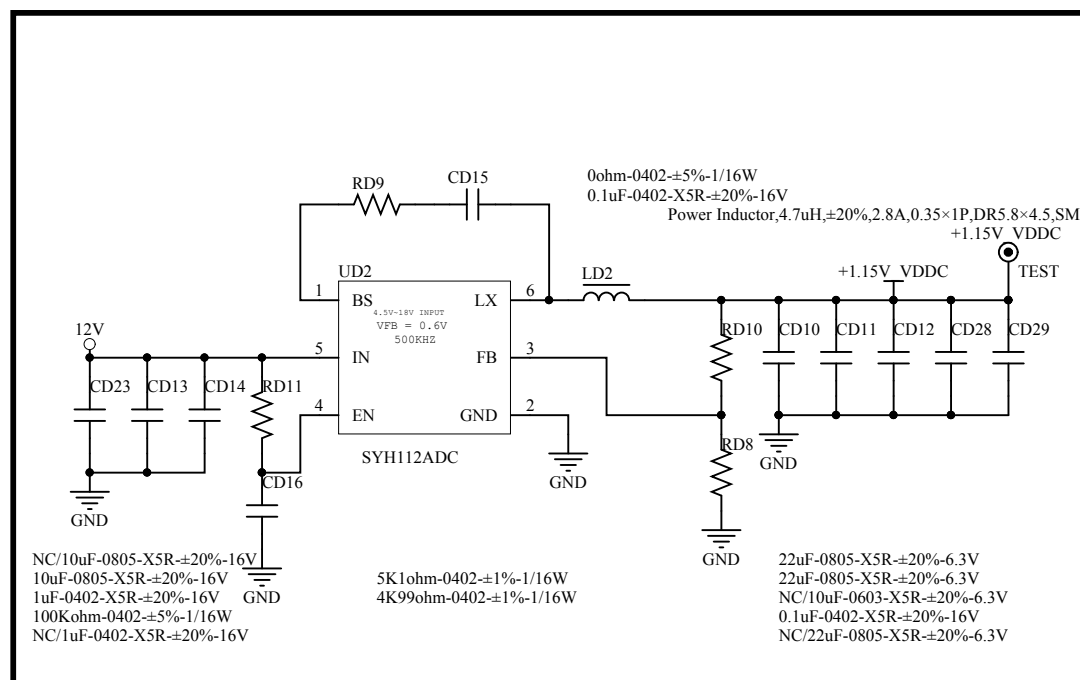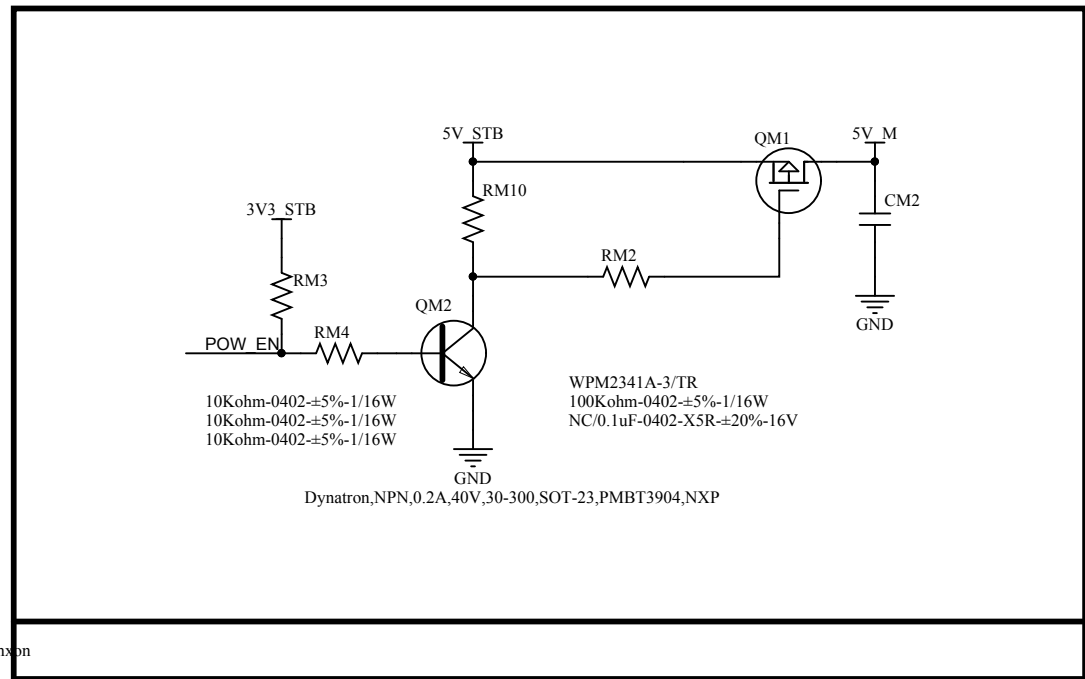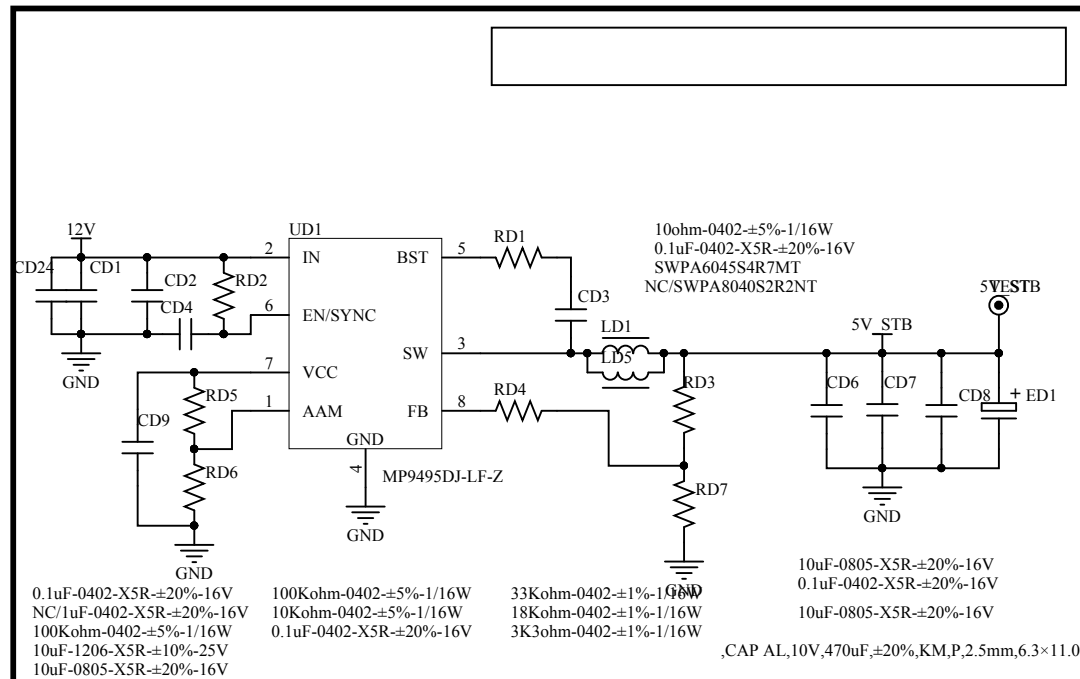

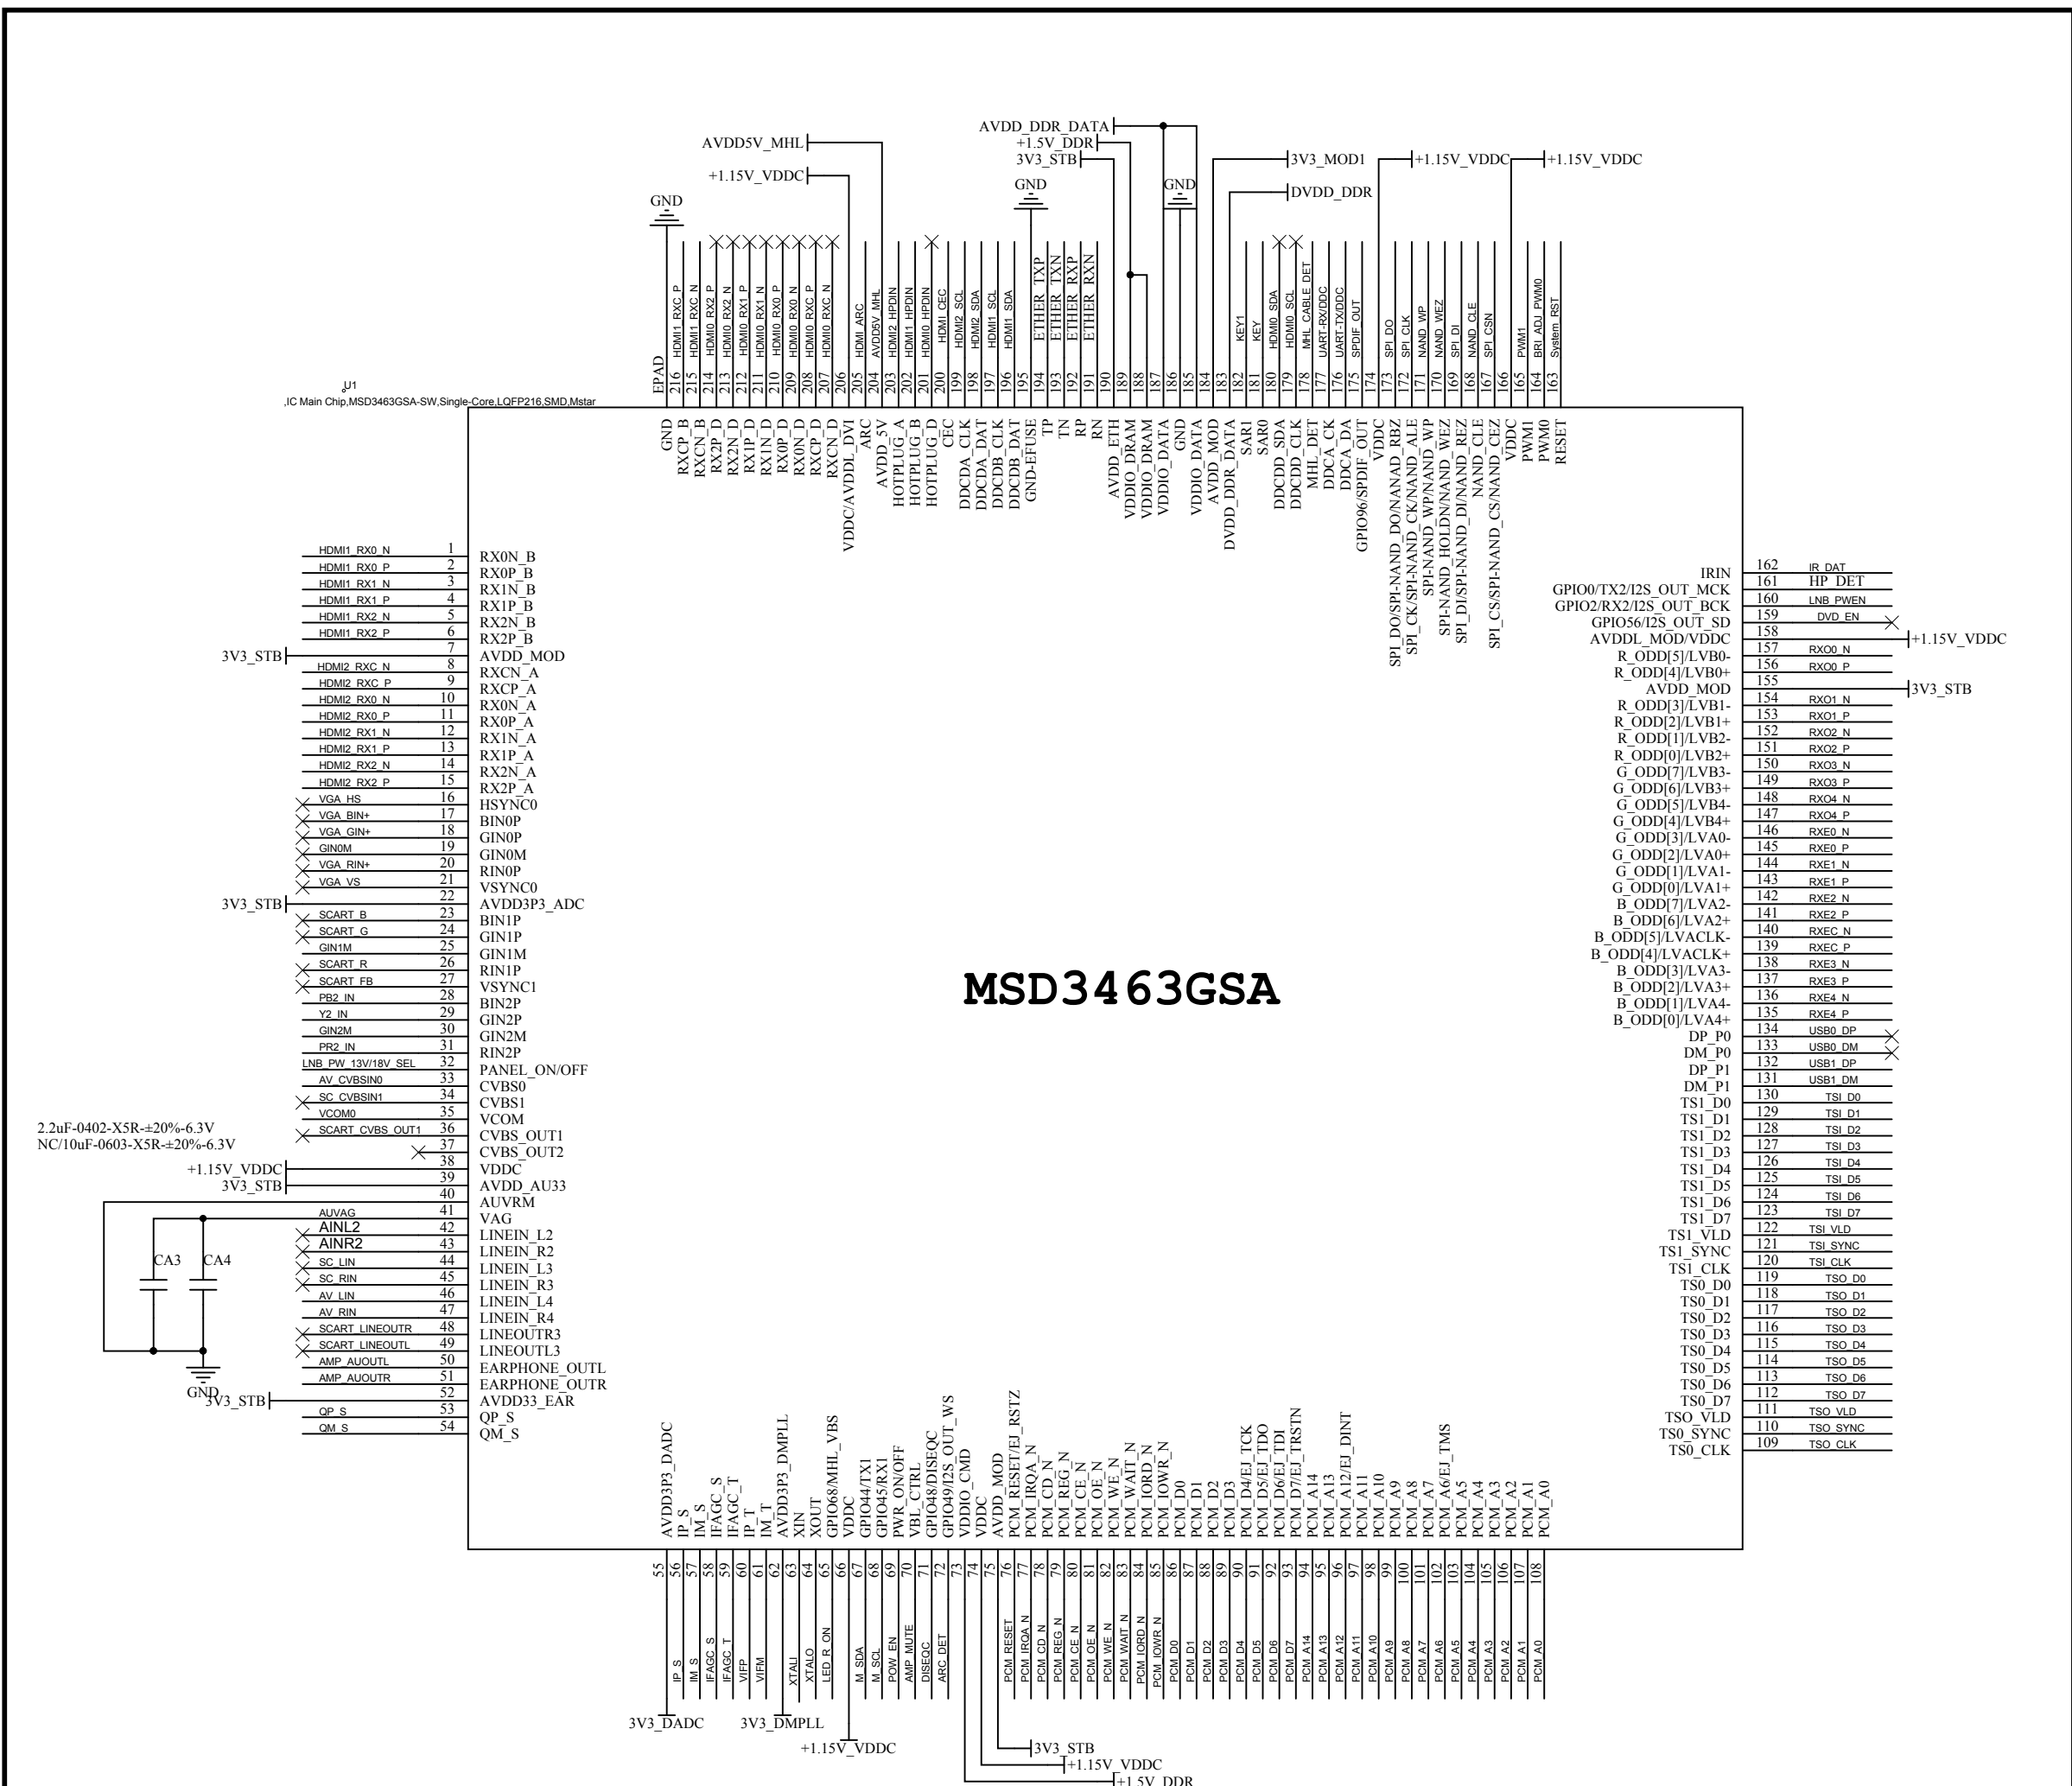

MSD3463GSA

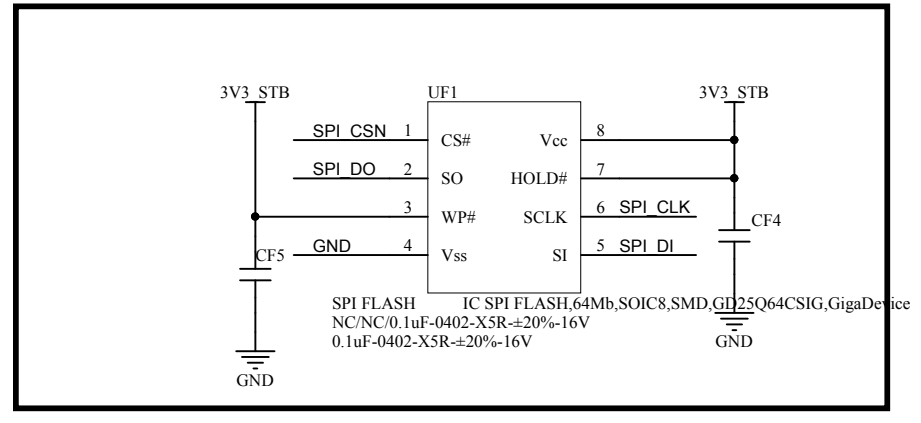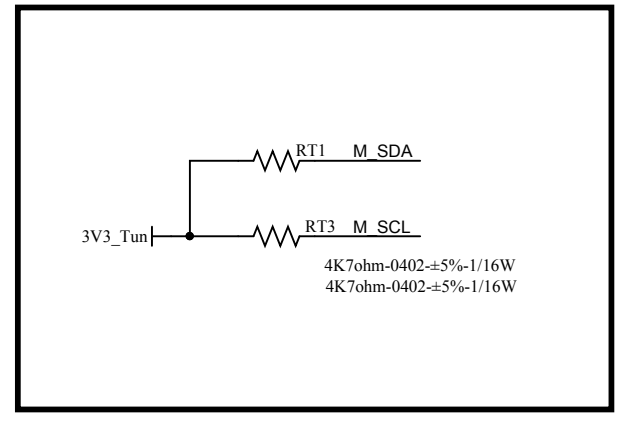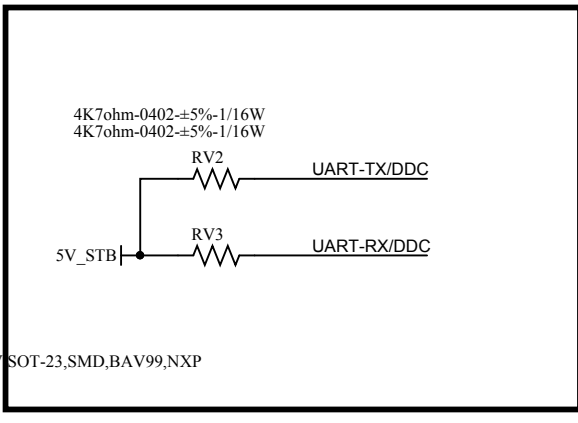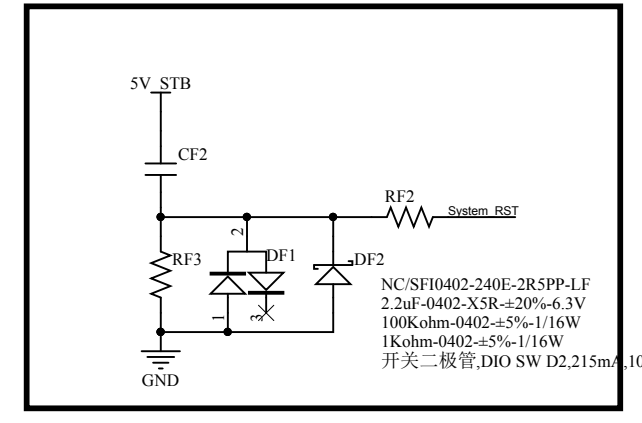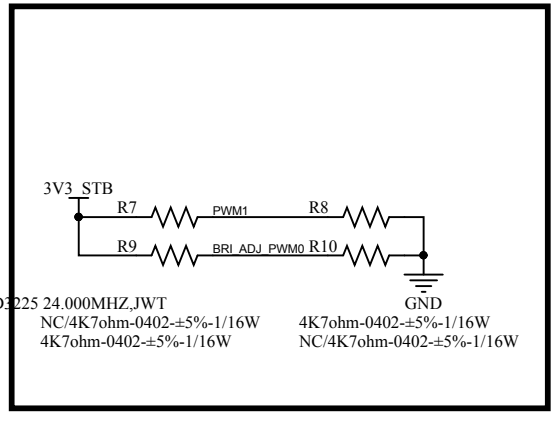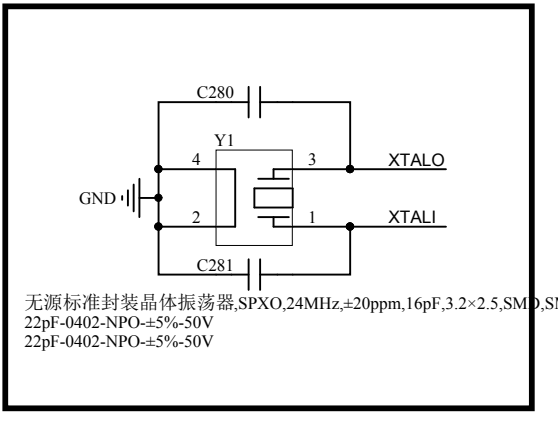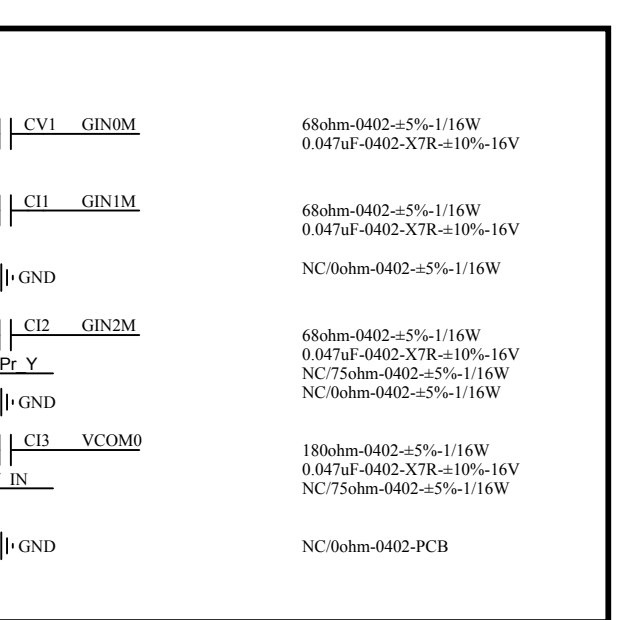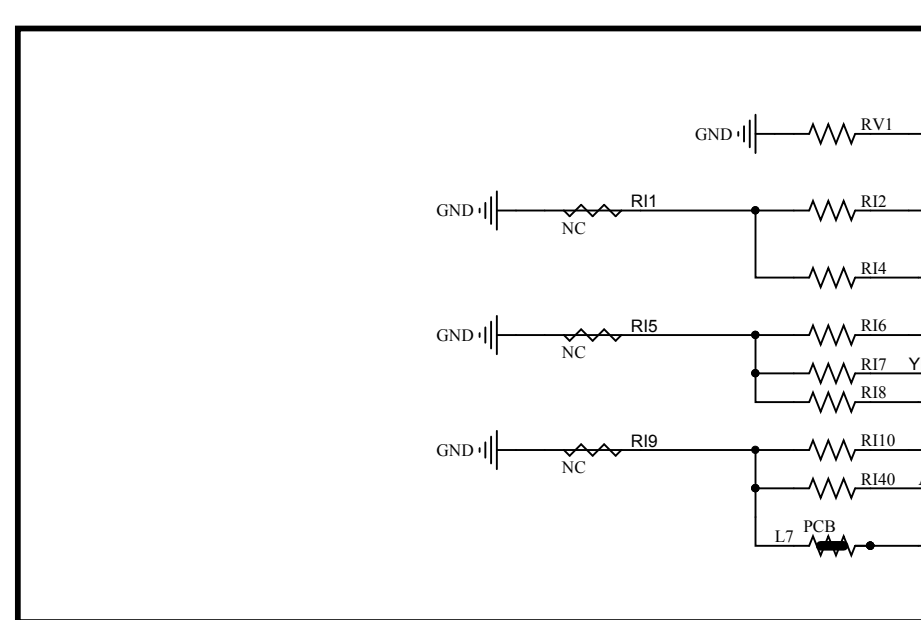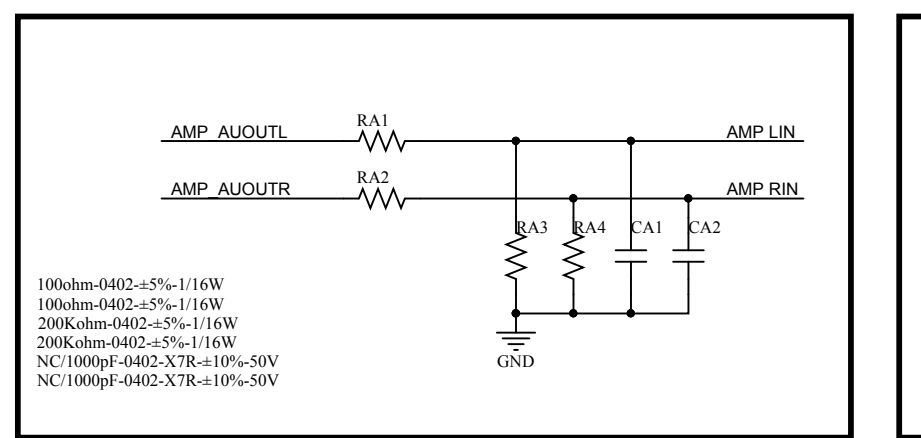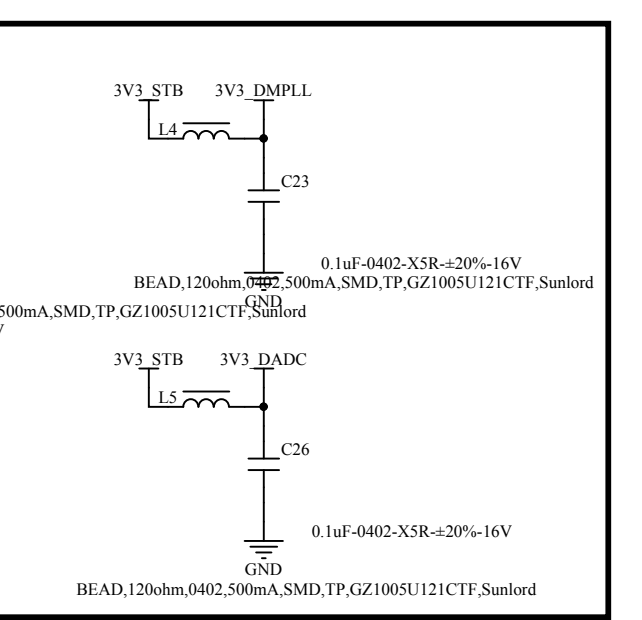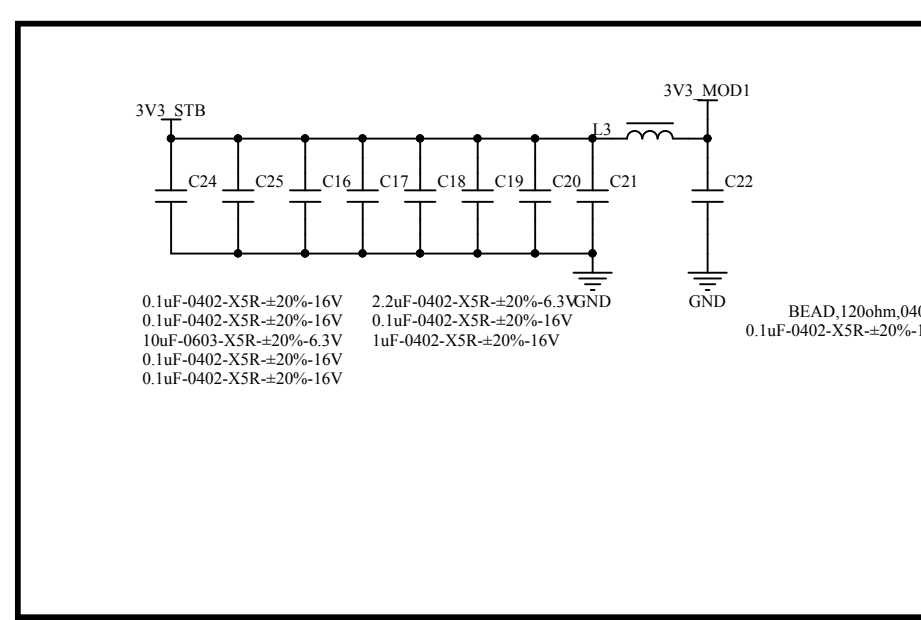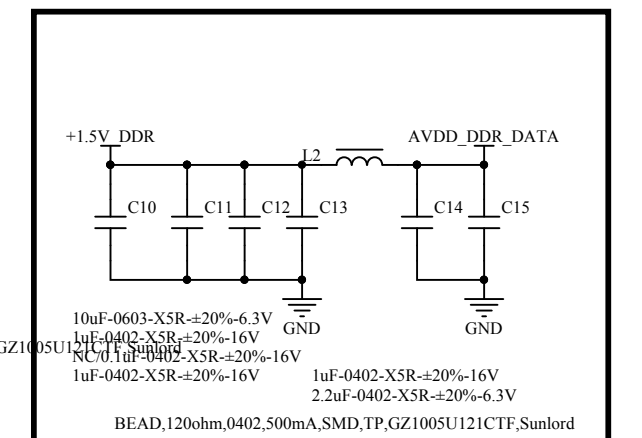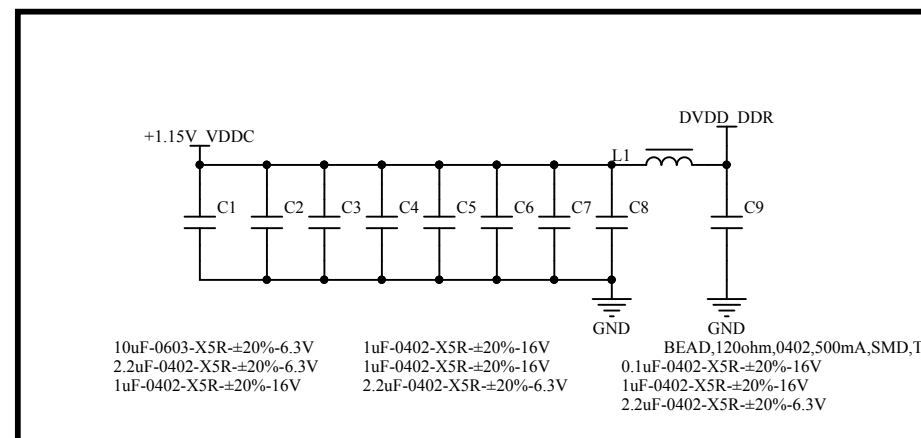
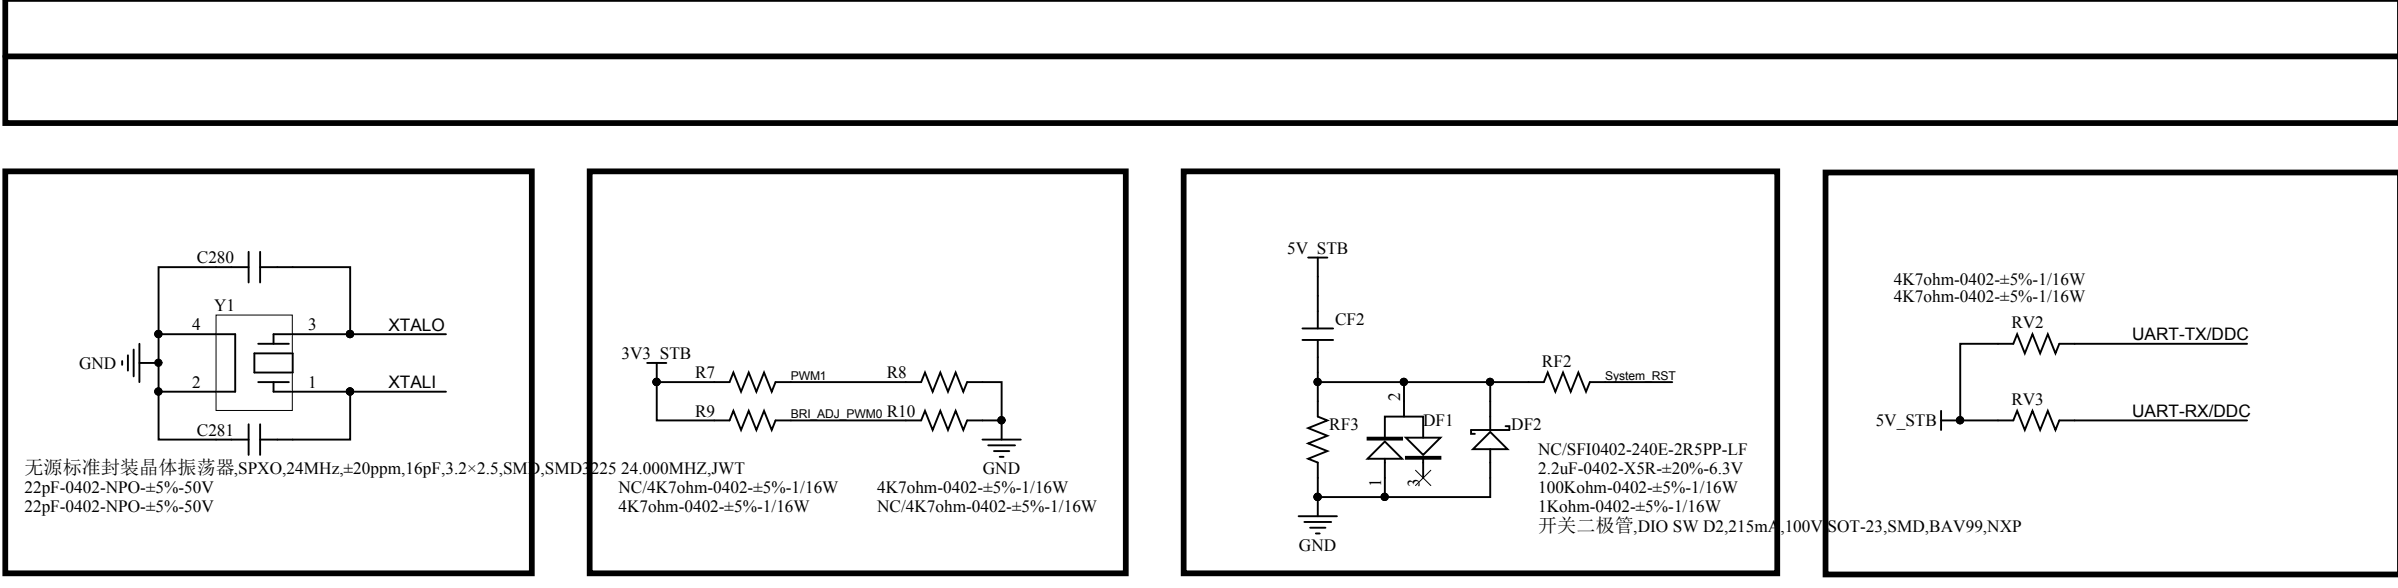






VCC PANEL 1	2	VCC PANEL
VCC PANEL 3	4	GND
GND	5	
RXO0 N	7	8 RXO0 P
RXO1 N	9	10 RXO1 P
RXO2 N	11	12 RXO2 P
GND	13	14 GND
RXEC N	15	16 RXEC P
RXO3 N	17	18 RXO3 P
RXE0 N	19	20 RXE0 P
RXE1 N	21	22 RXE1 P
RXE2 N	23	24 RXE2 P
GND	25	26 GND
RXEC N	27	28 RXEC P
RXE3 N	29	30 RXE3 P
GND	31	32 GND
CON1/	33	34 Display
M_SCL/	35	36 M_SDA/
RXO4 N	37	38 RXO4 P
RXE4 N	39	40 RXE4 P




pin connector,2×20Pin/without pin6,D,D2.0mm,L=2.6mm,DIP,LD

VCC PANEL 1	2	VCC PANEL
VCC PANEL 3	4	GND
GND	5	
RXO0 N	7	8 RXO0 P
RXO1 N	9	10 RXO1 P
RXO2 N	11	12 RXO2 P
GND	13	14 GND
RXEC N	15	16 RXEC P
RXO3 N	17	18 RXO3 P
RXE0 N	19	20 RXE0 P
RXE1 N	21	22 RXE1 P
RXE2 N	23	24 RXE2 P
GND	25	26 GND
RXEC N	27	28 RXEC P
RXE3 N	29	30 RXE3 P
GND	31	32 GND
CON1/	33	34 Display
M_SCL/	35	36 M_SDA/
RXO4 N	37	38 RXO4 P
RXE4 N	39	40 RXE4 P




NC/ connect jack,2×20Pin/without pin6,D2.0,D,SNAP,Fool-proofing,Nature,L=2.6mm,DIP,CJ

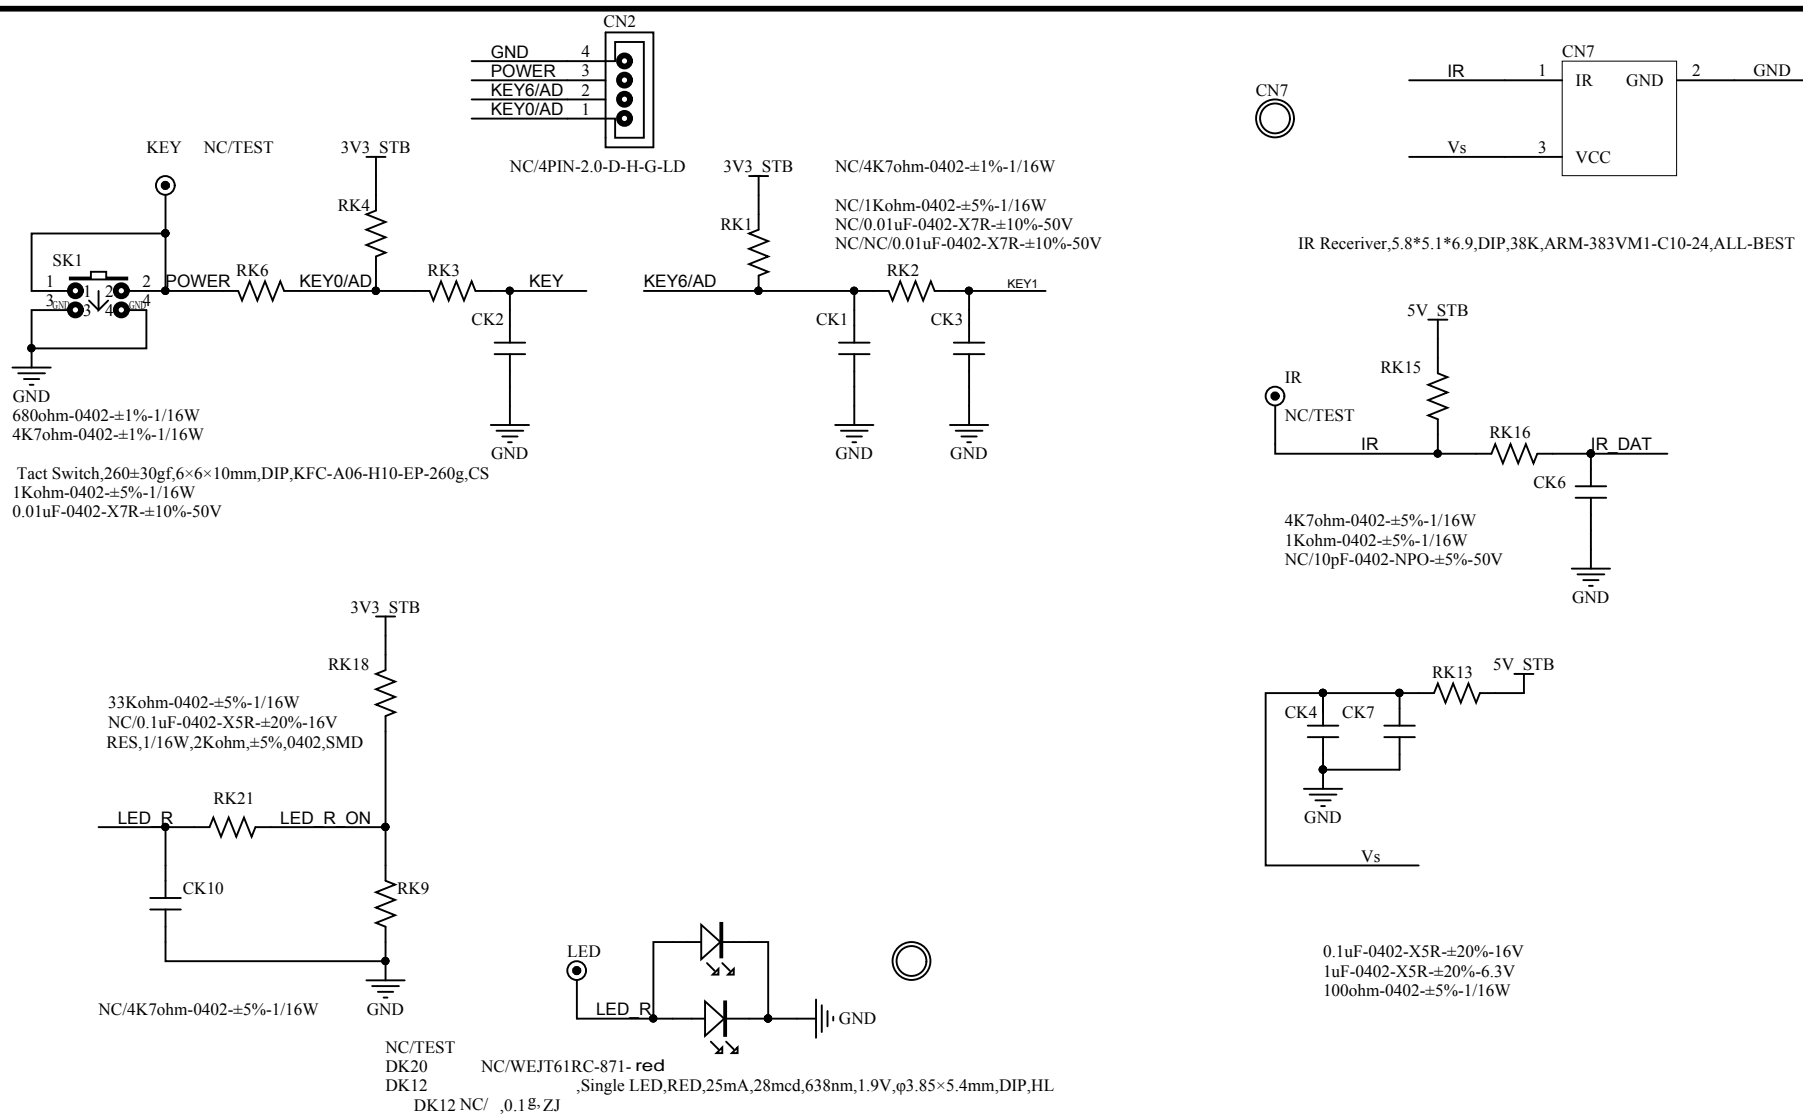

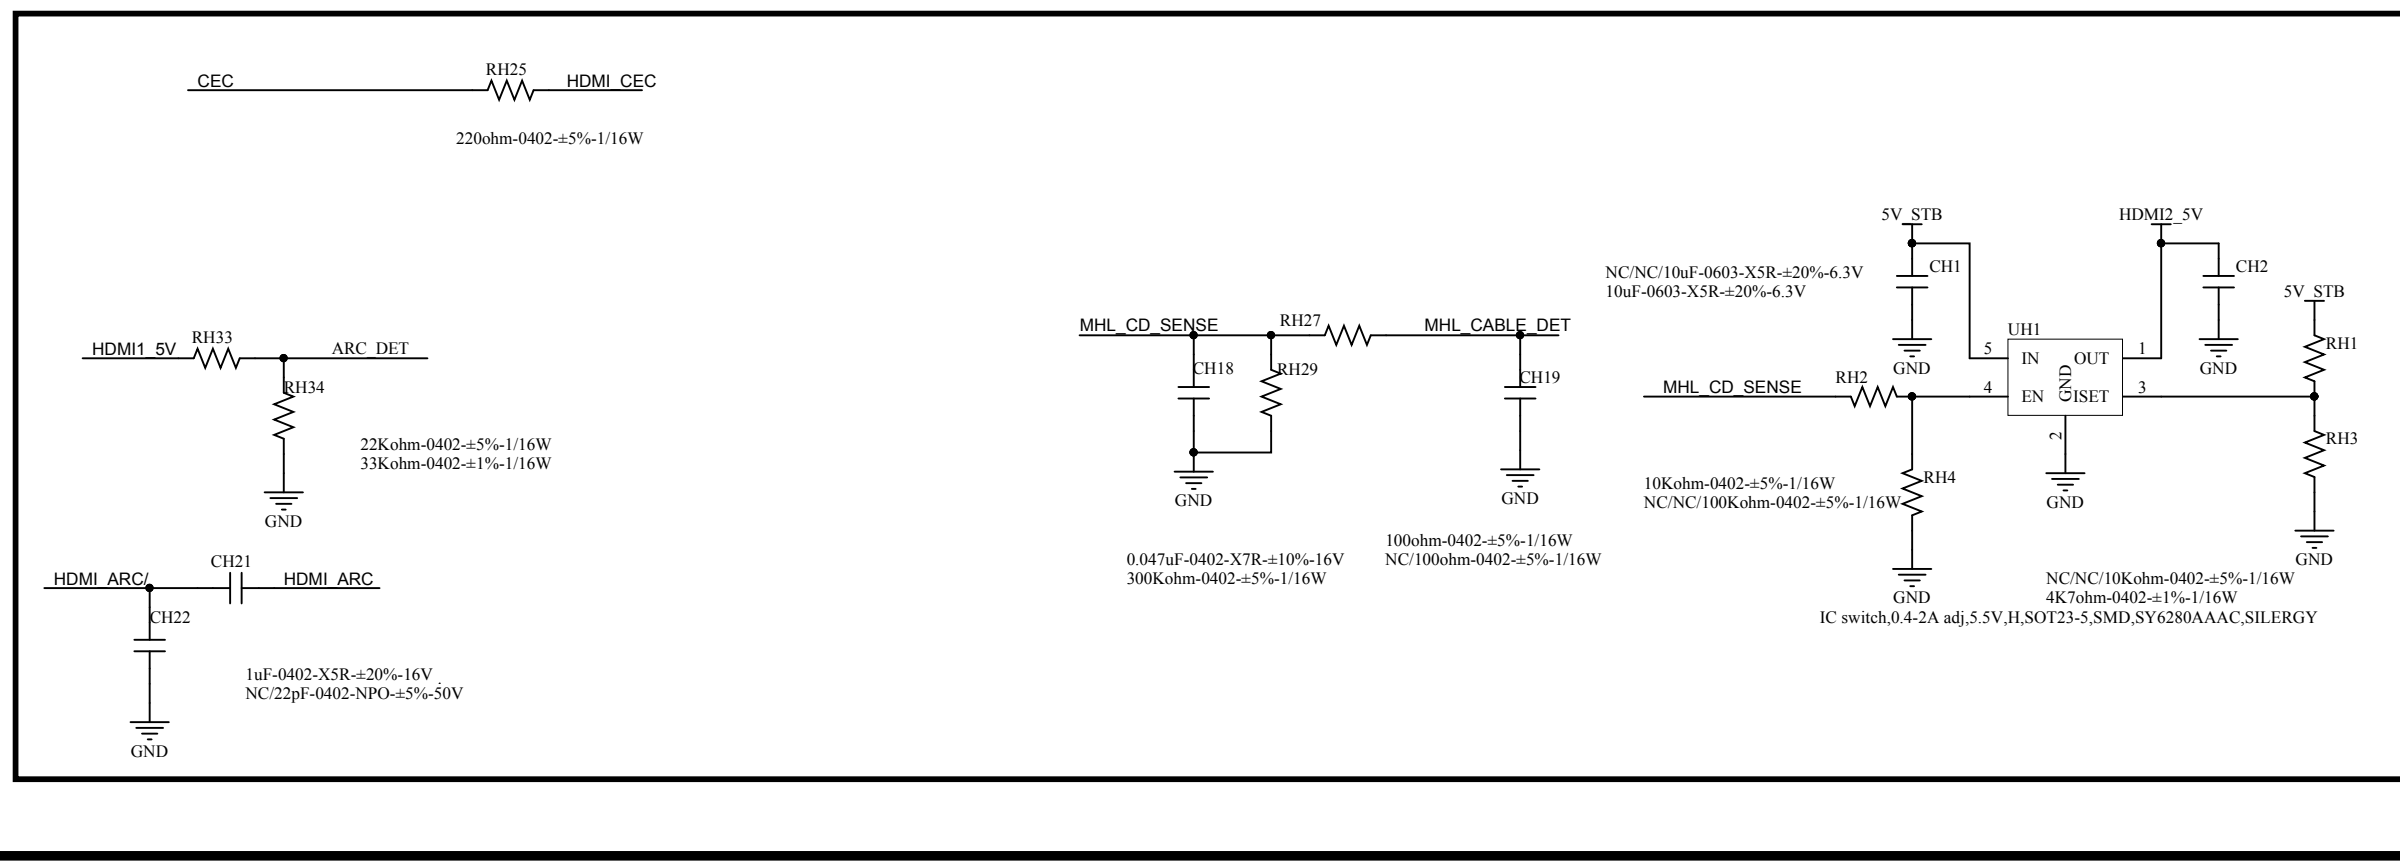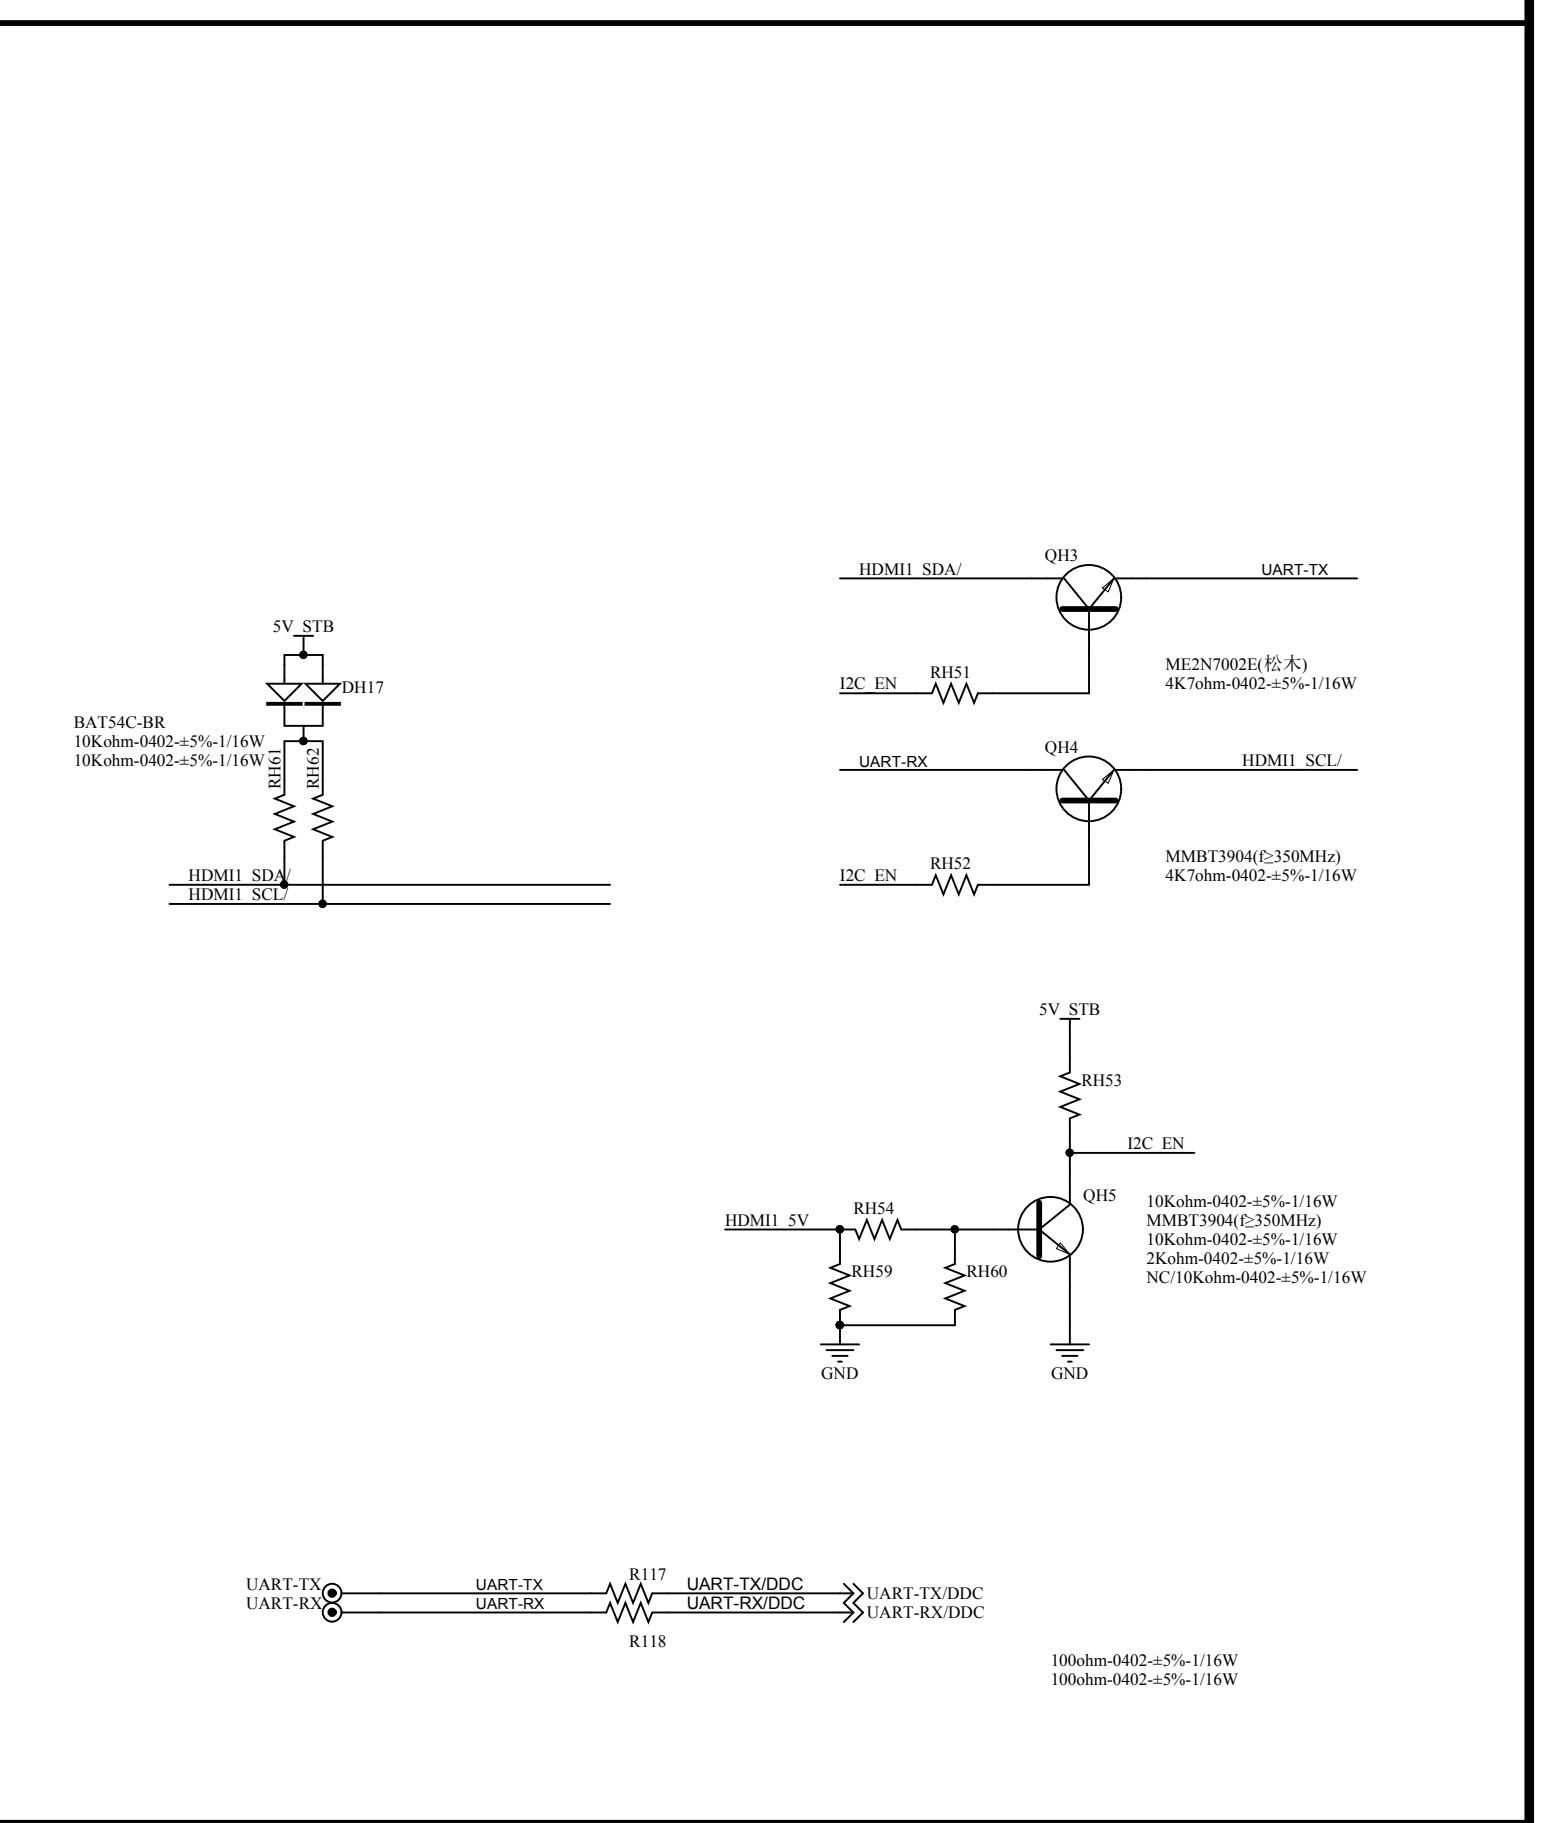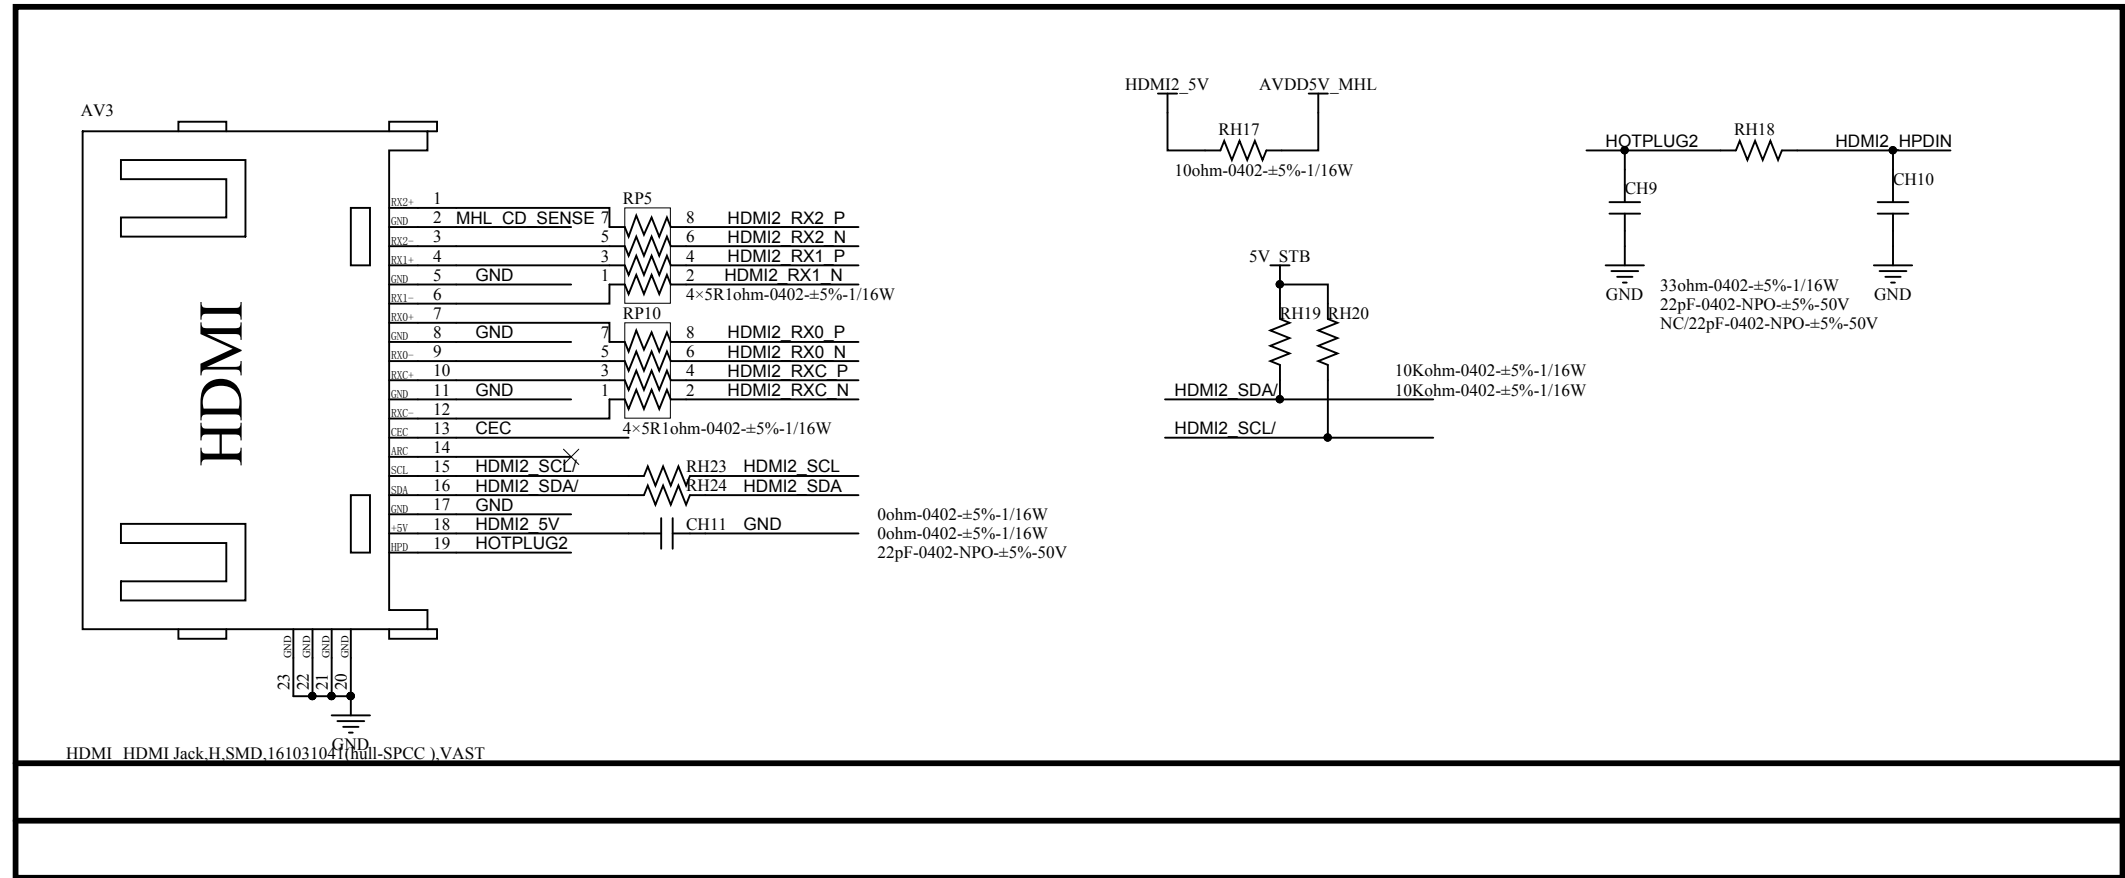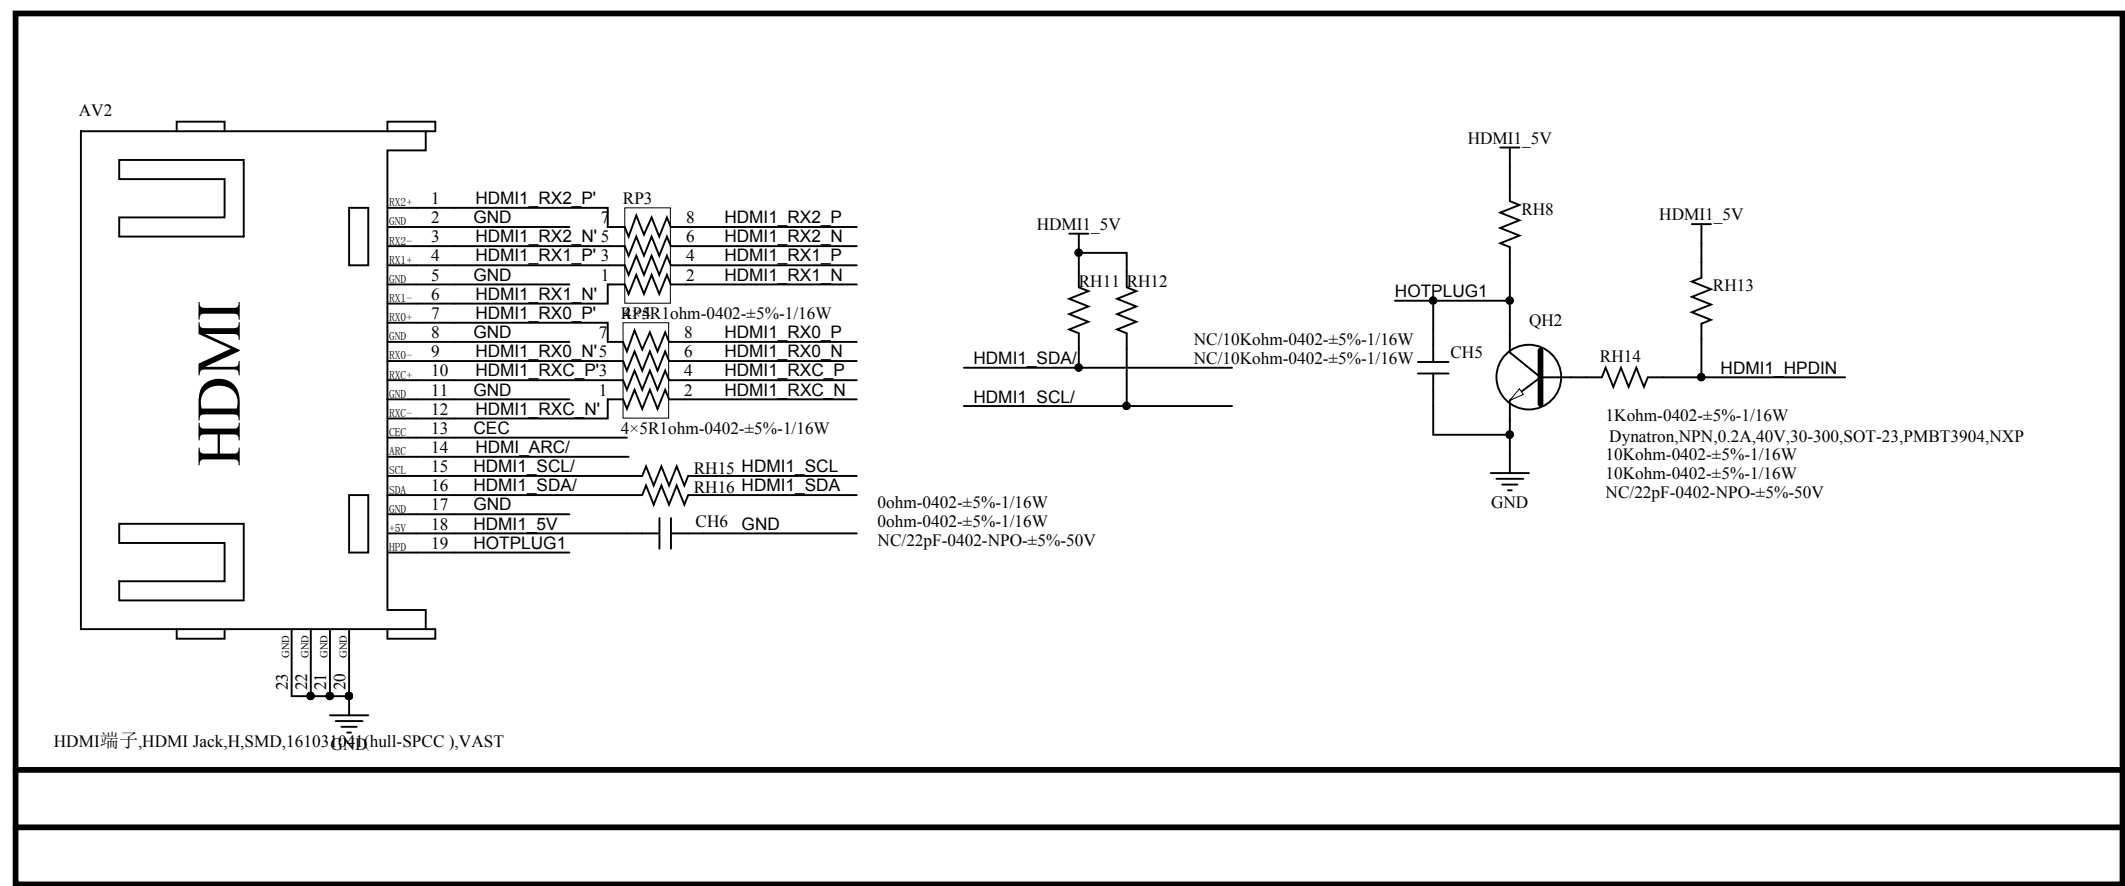


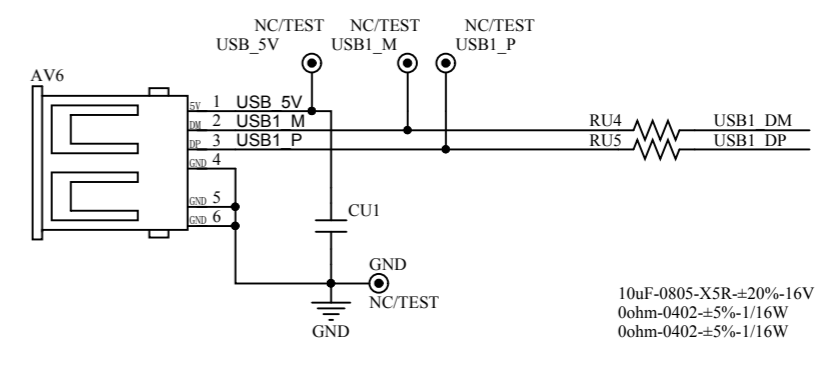
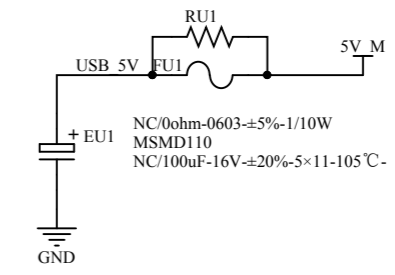
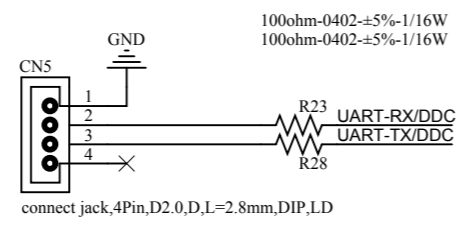


USB ,USB Jack,H,Single,flange,DIP,USB-AF-90-DIP-FE-W-curved-entad-1,XFE

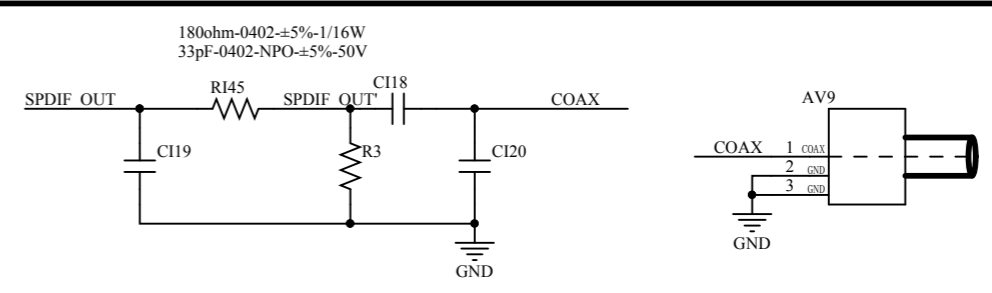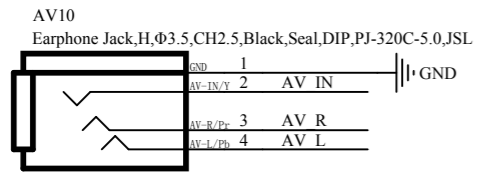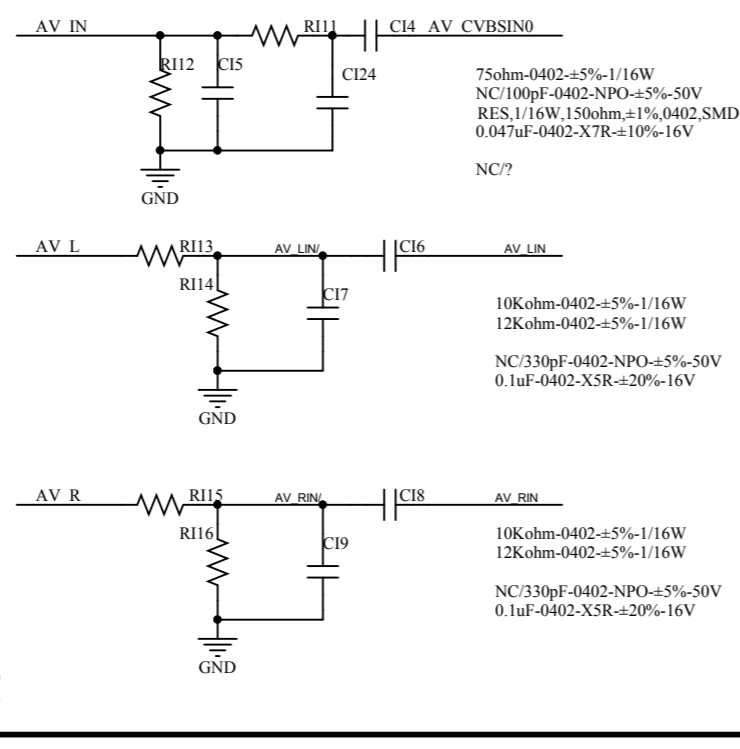

NC/120ohm-0402-±1%-1/16W
NC/0.1uF-0402-X5R-±20%-16V
NC/RCA ,RCA Jack,AV1,H,Orange,CH5.5,Seal,DIP,AV38A-01S-5020,QS
NC/NC/330pF-0402-NPO-±5%-50V

OPTICAL,H,DIP,182500191,VAST
0ohm-0402-±5%-1/16W

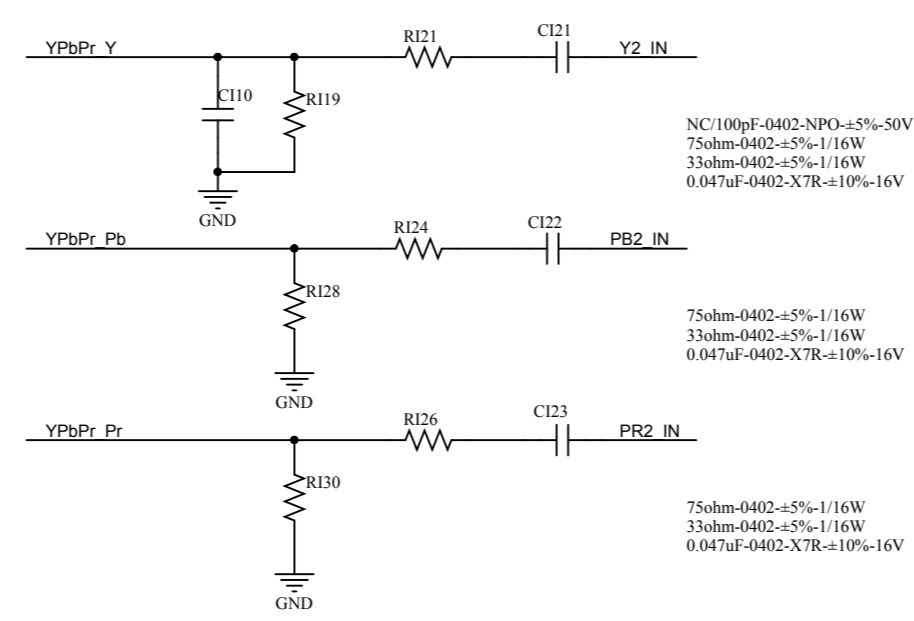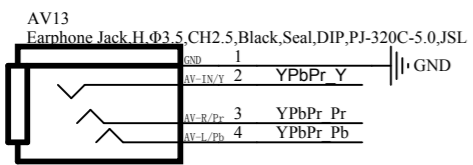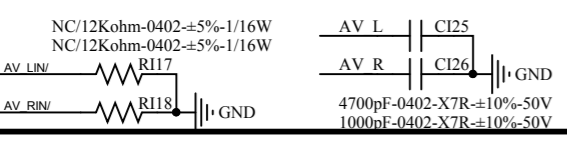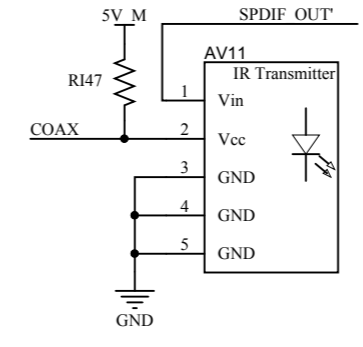

A

B

C


D










A





B





C

D

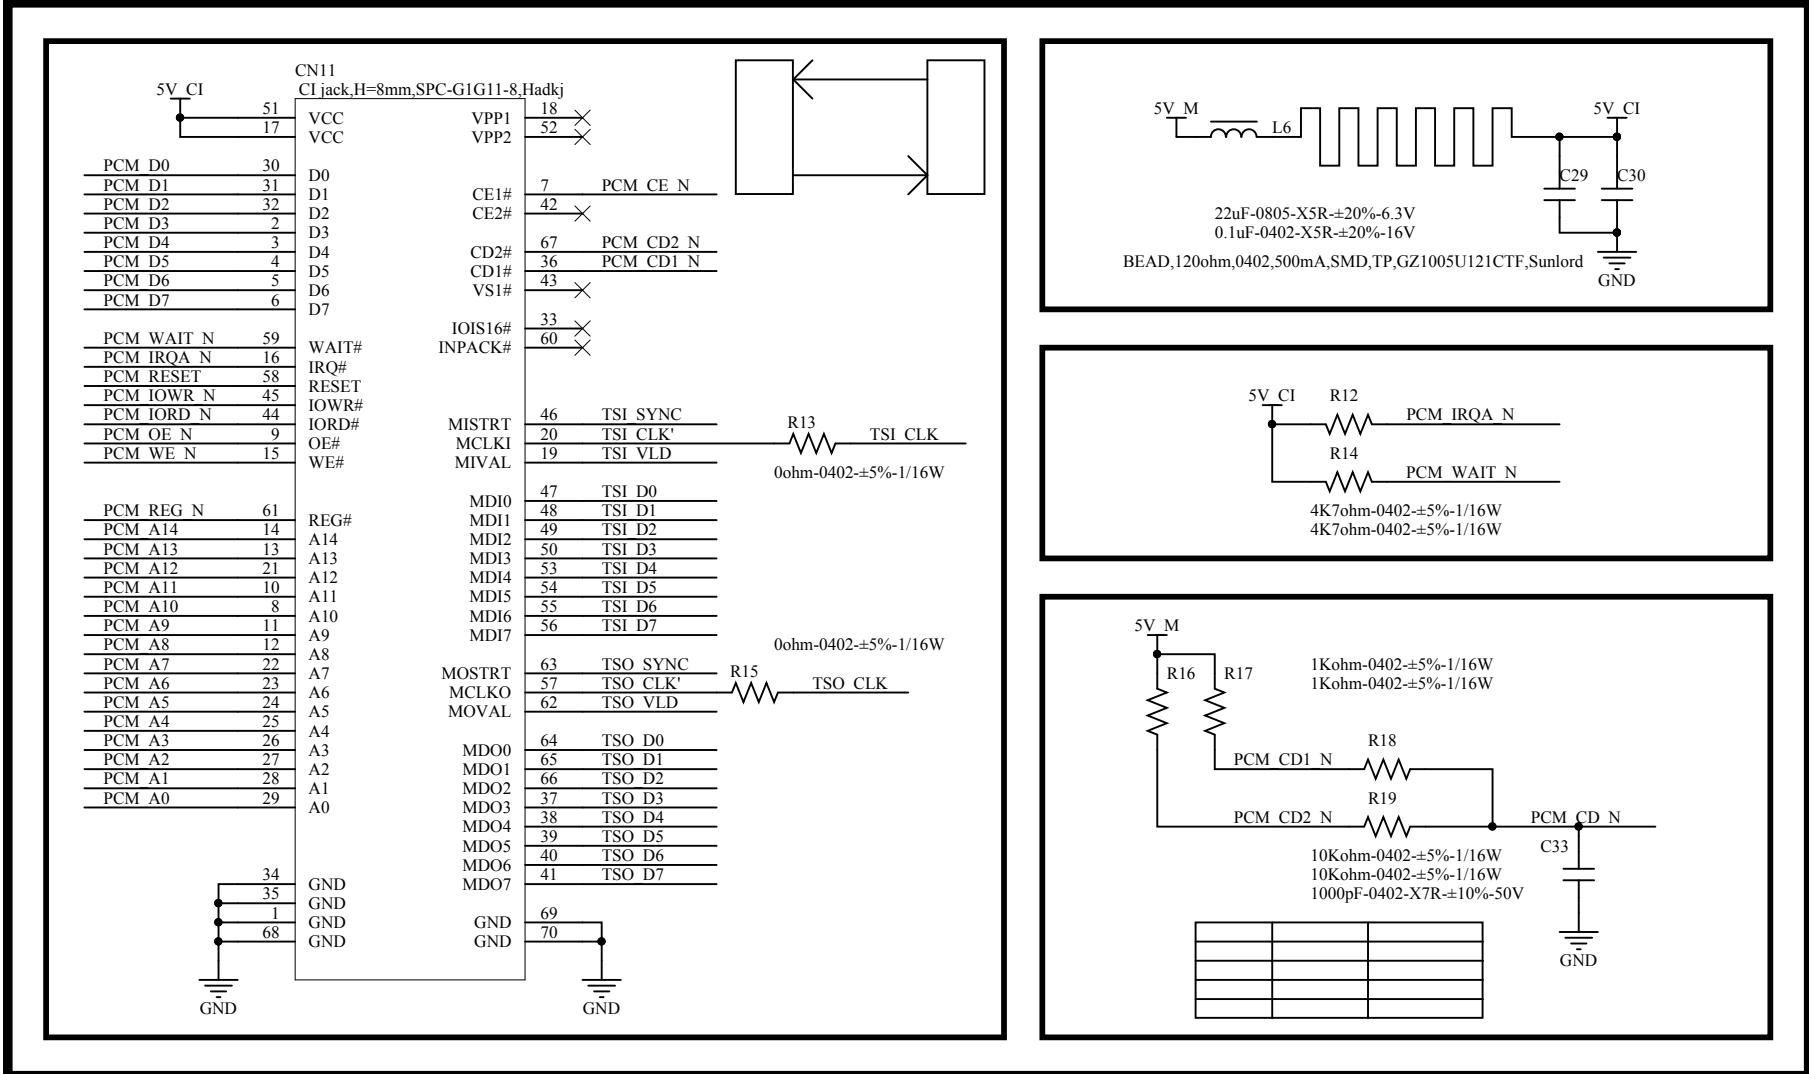

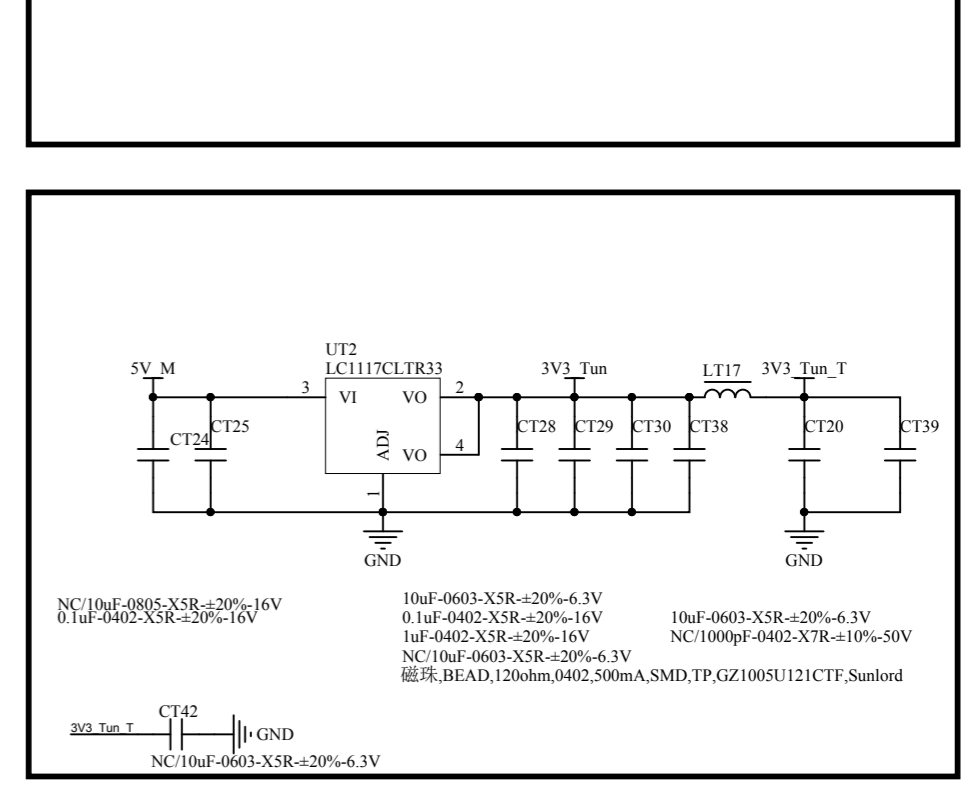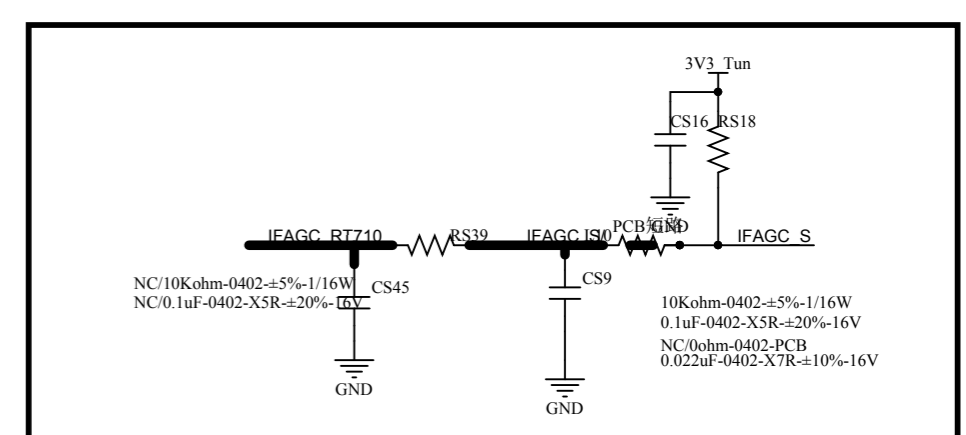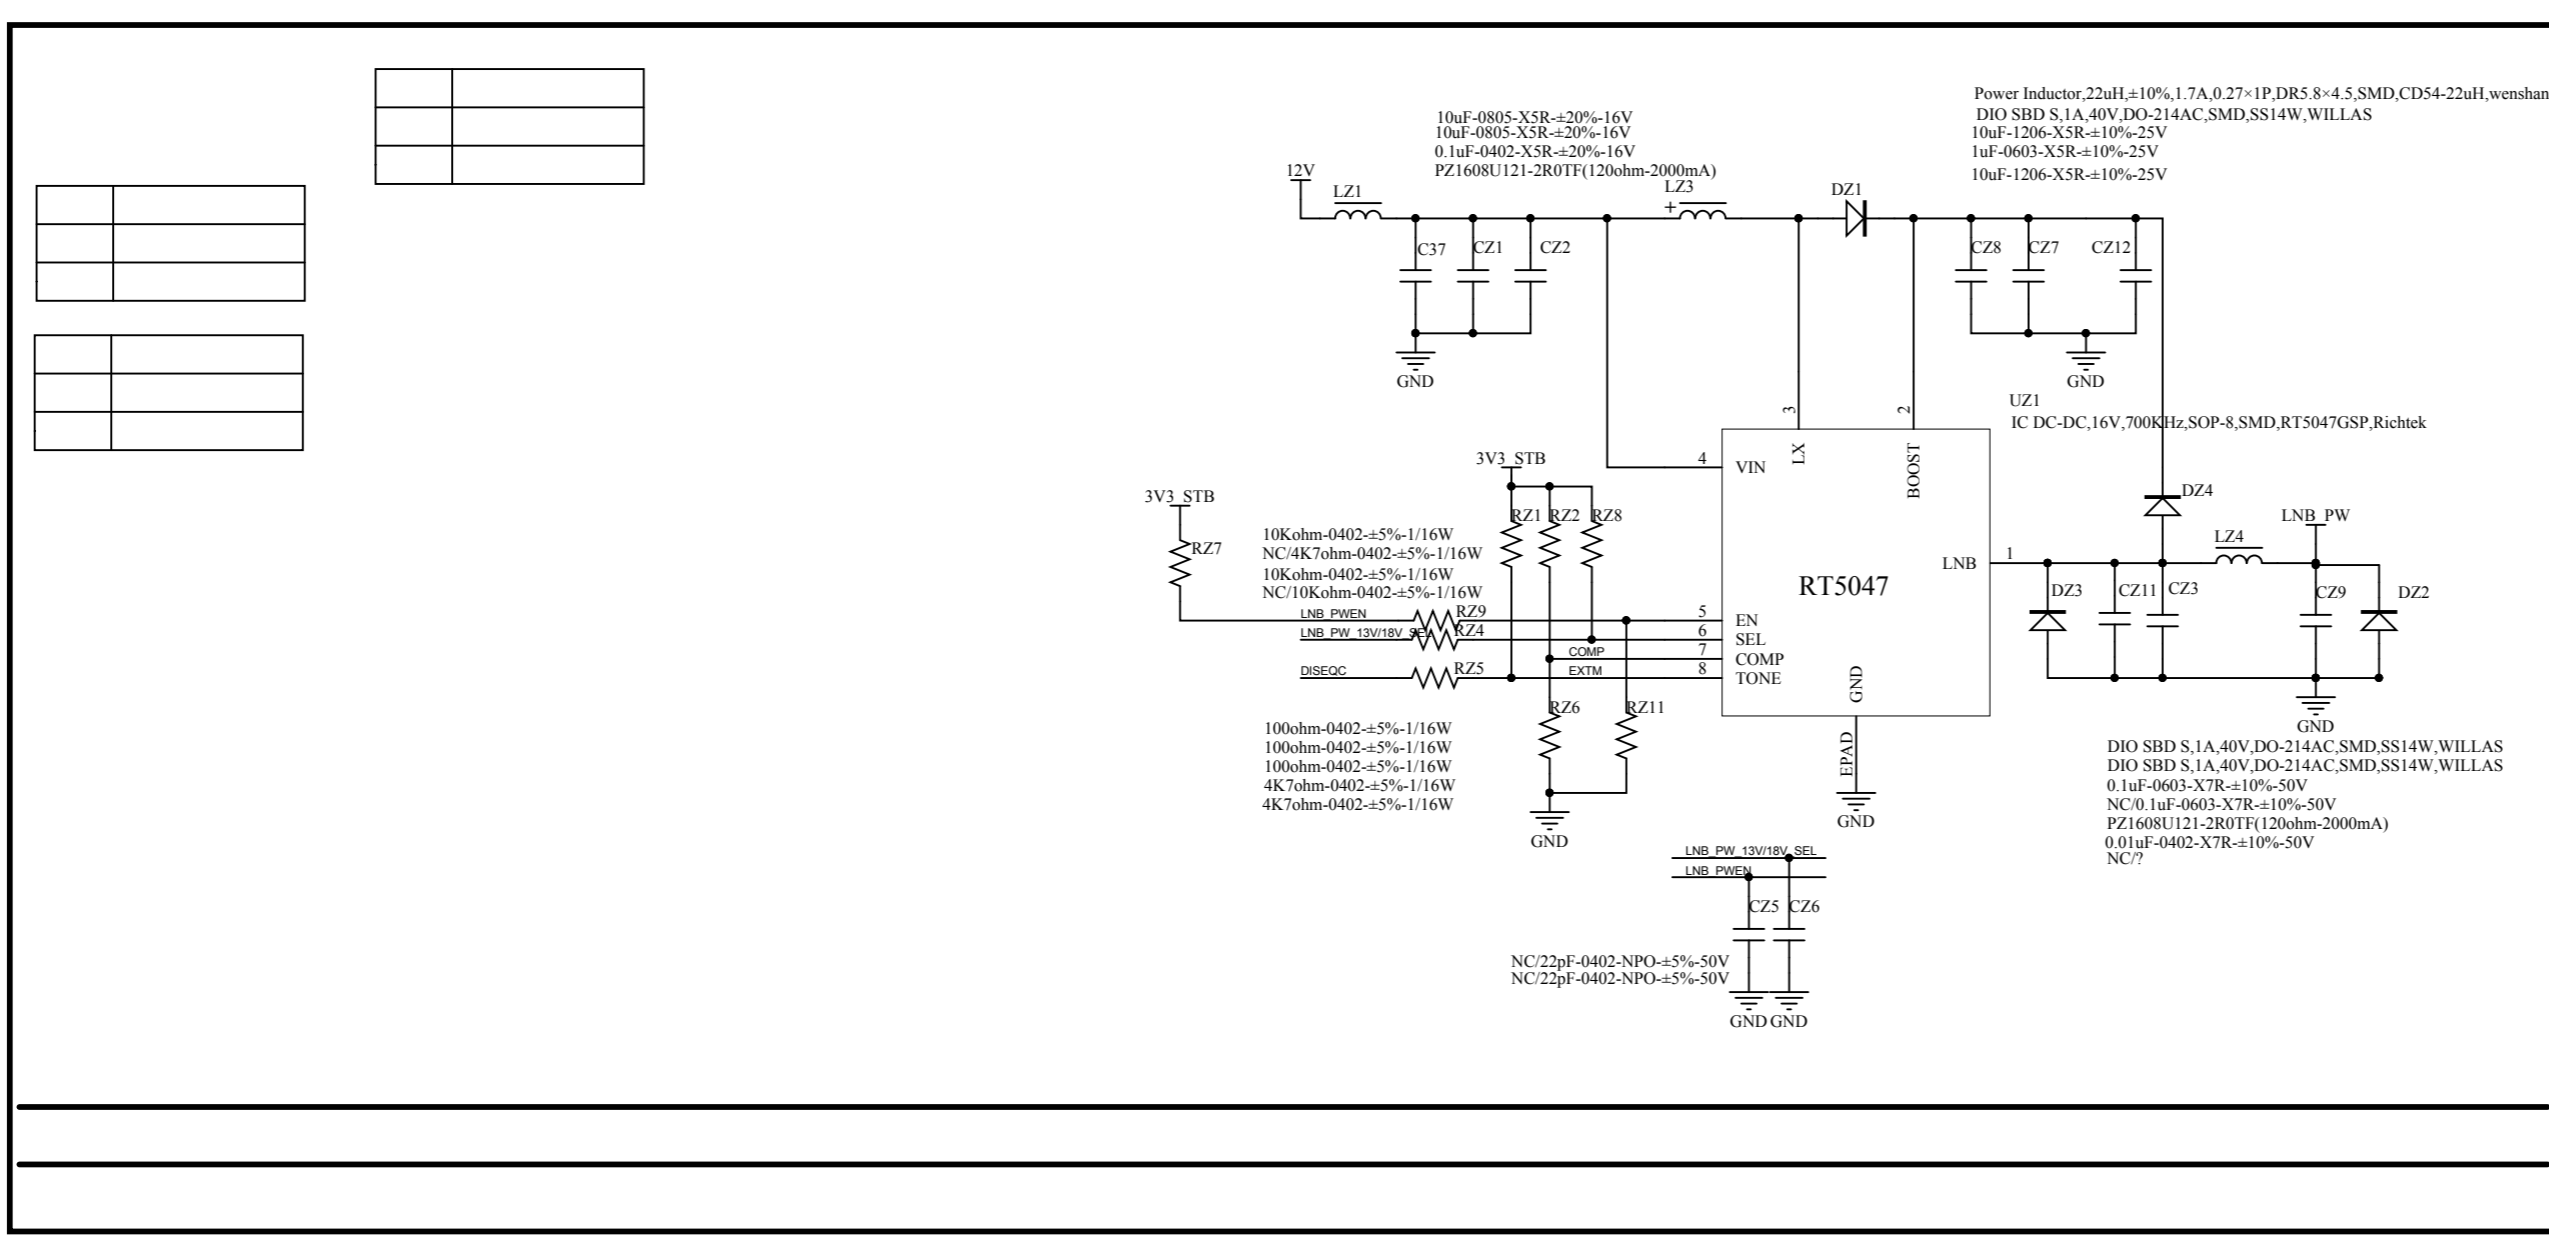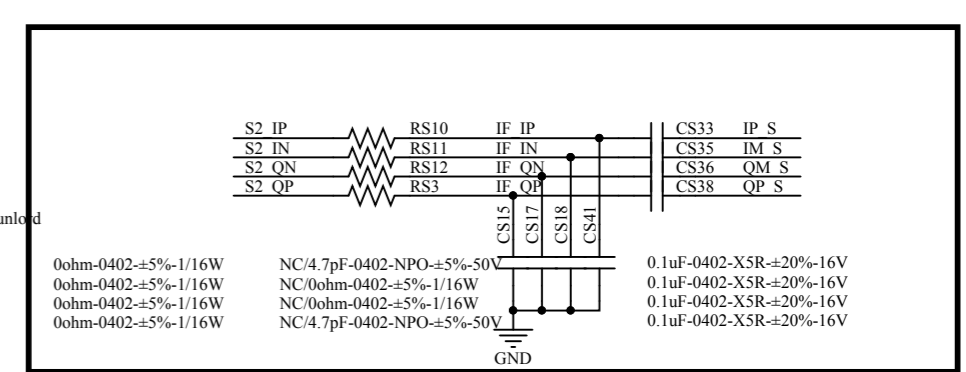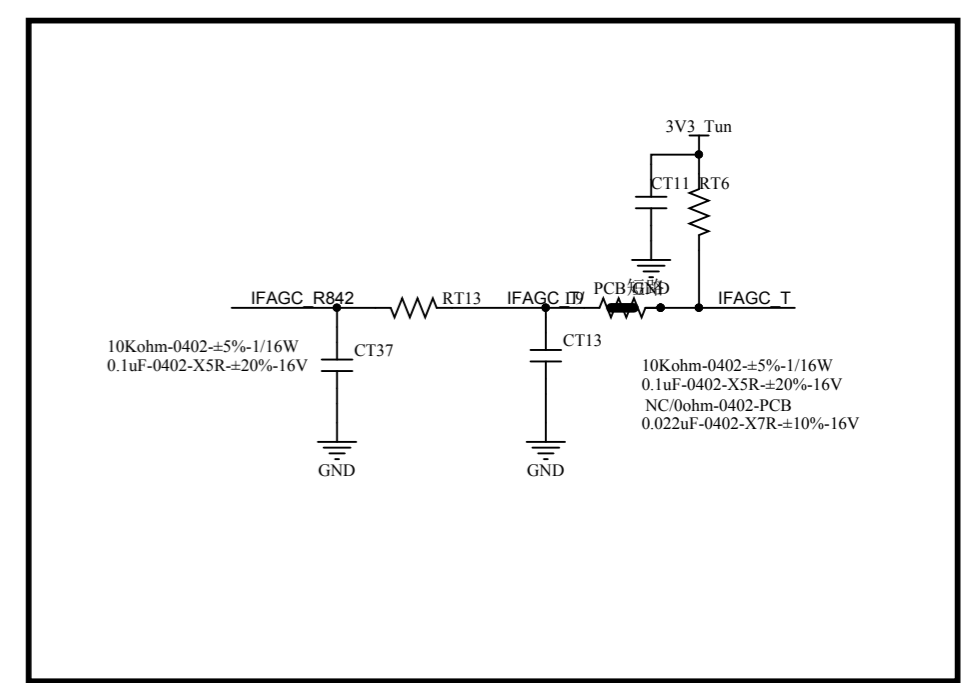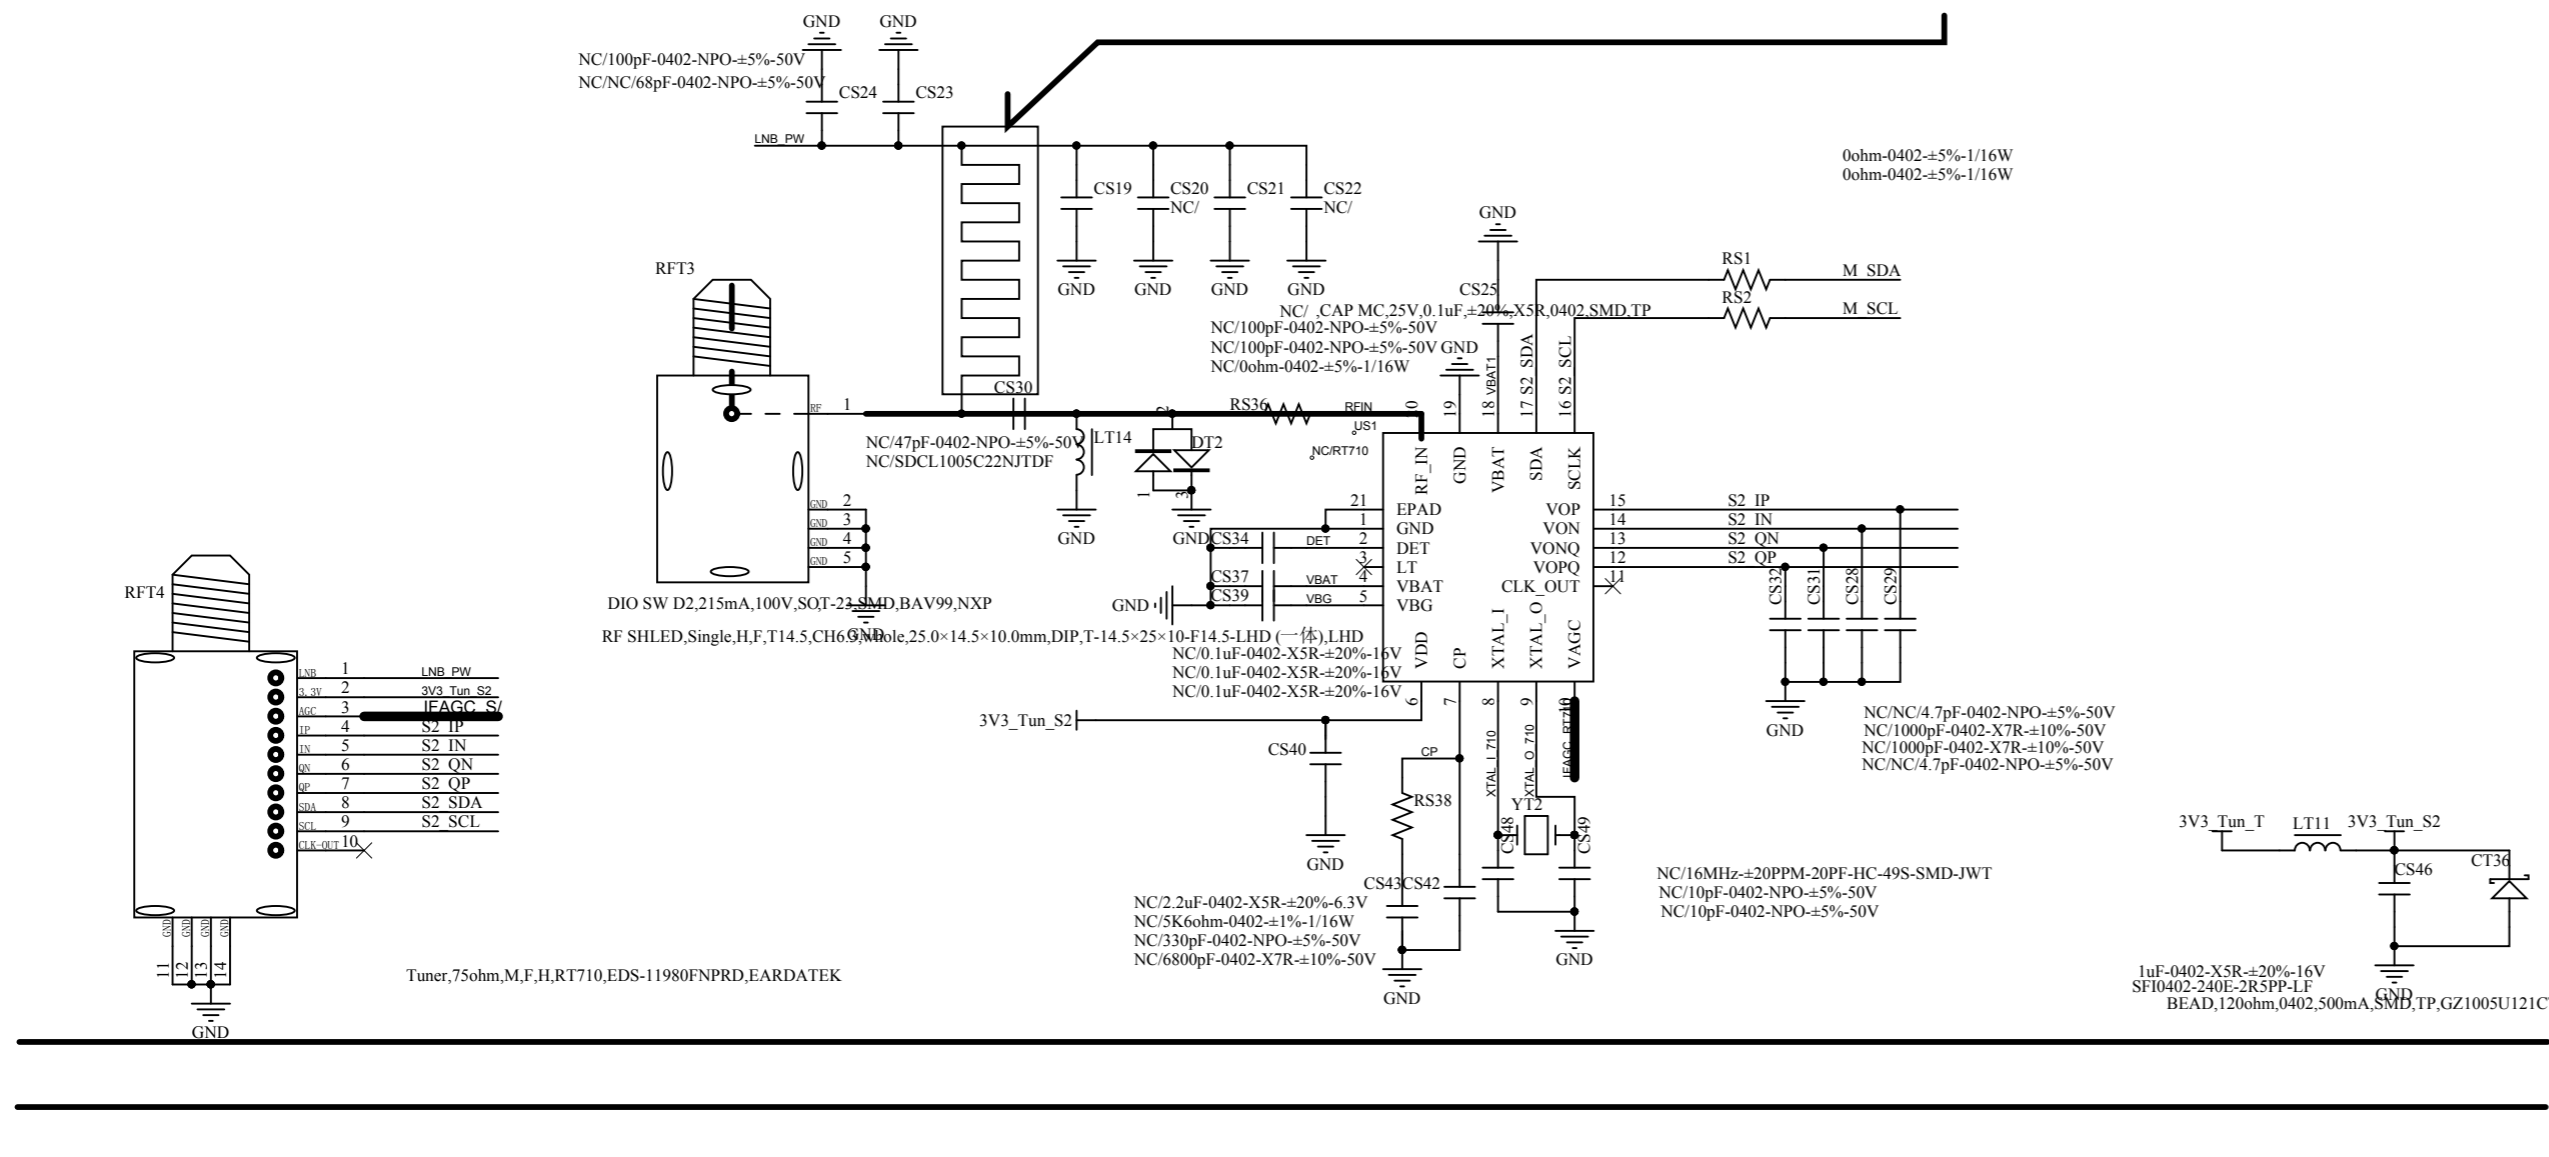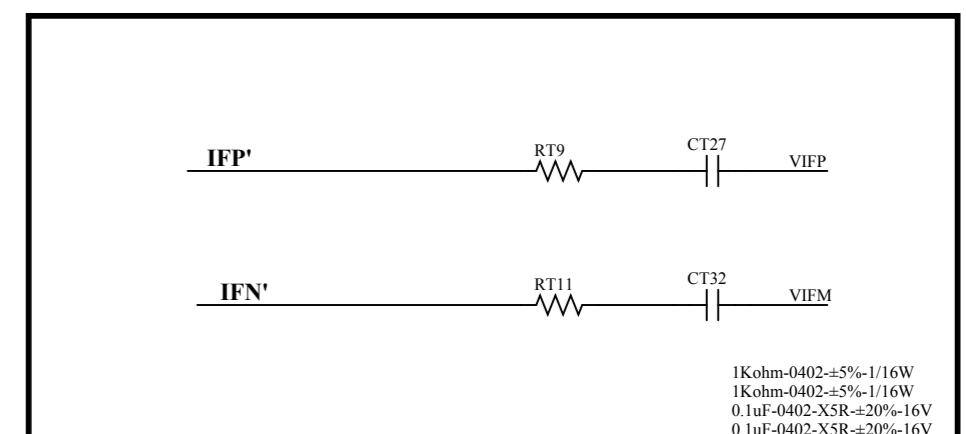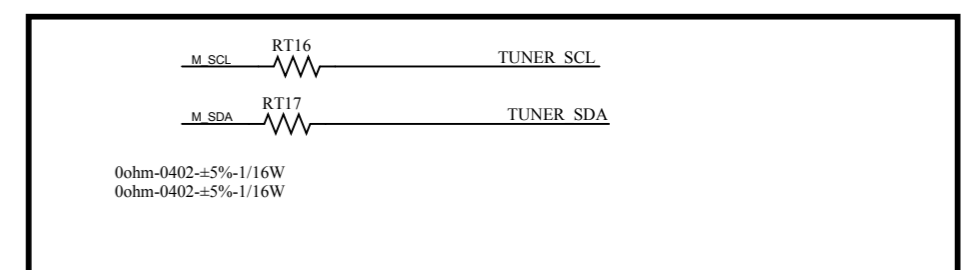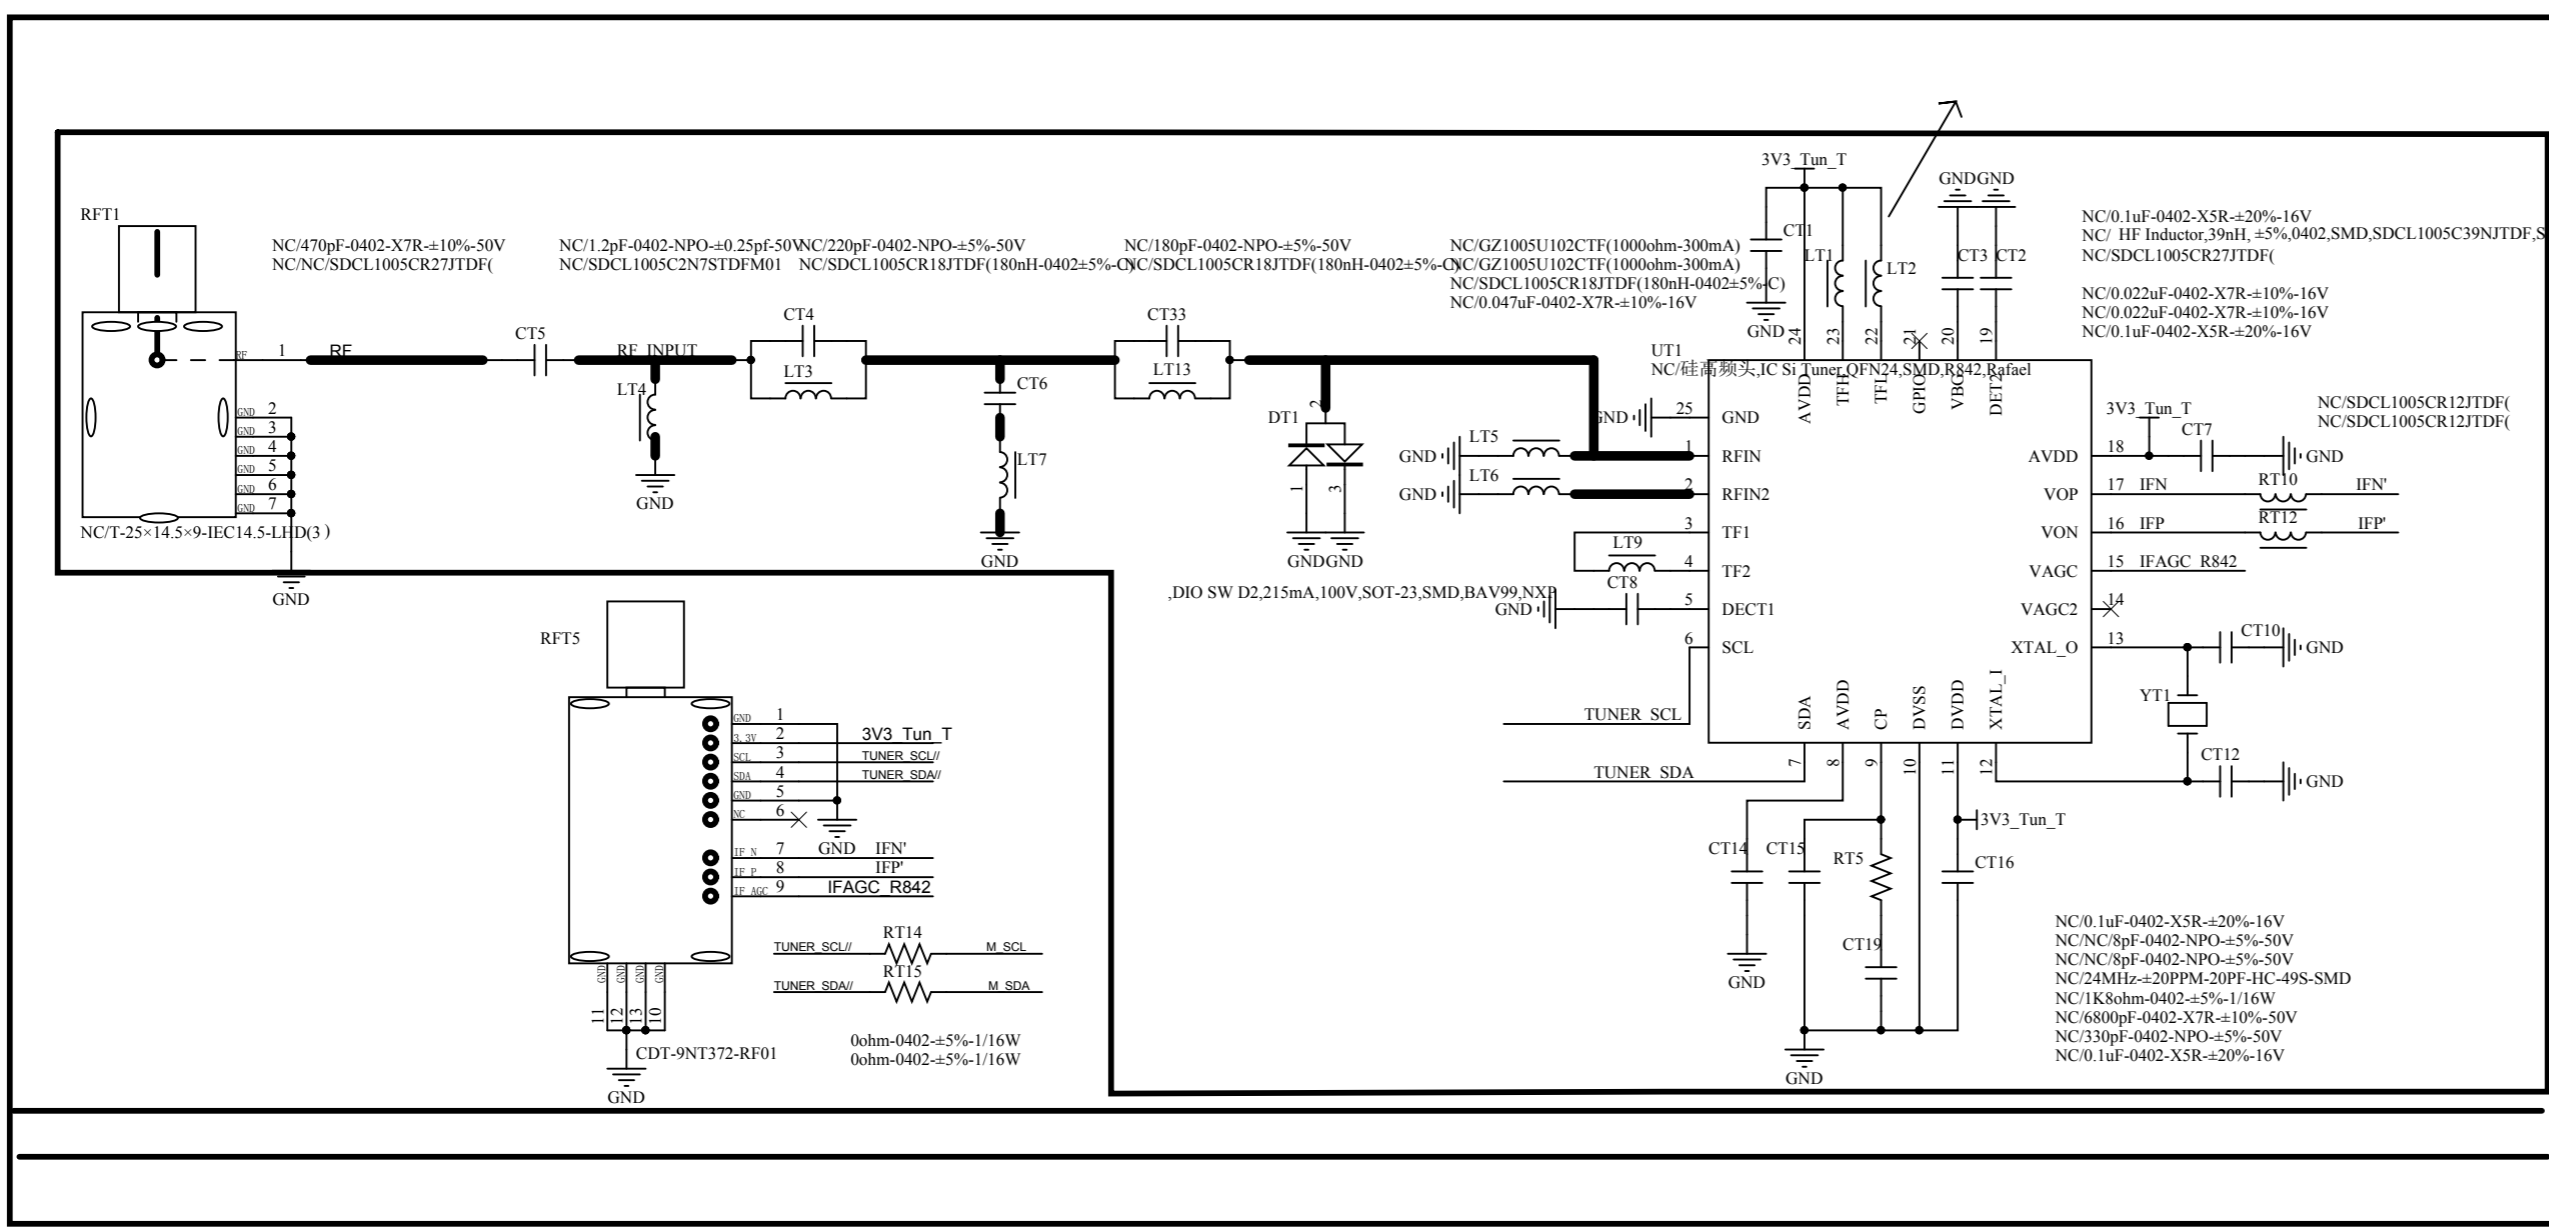

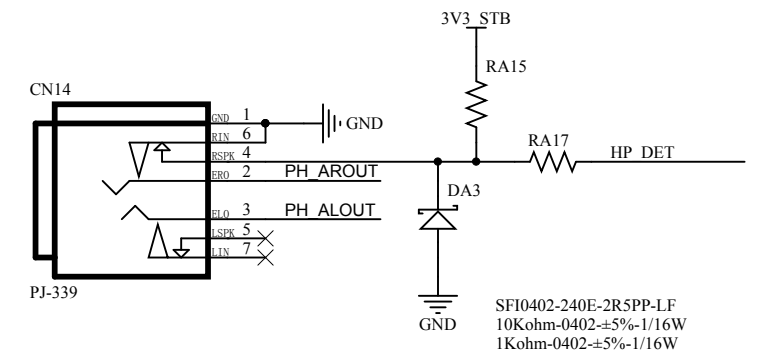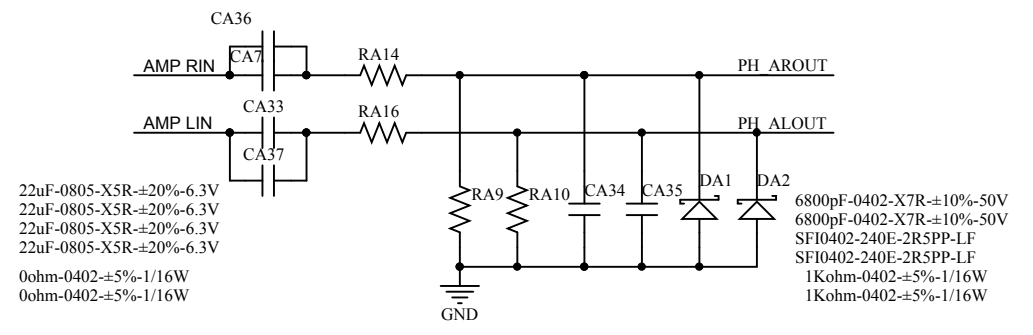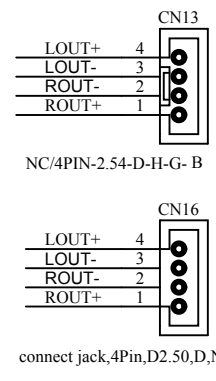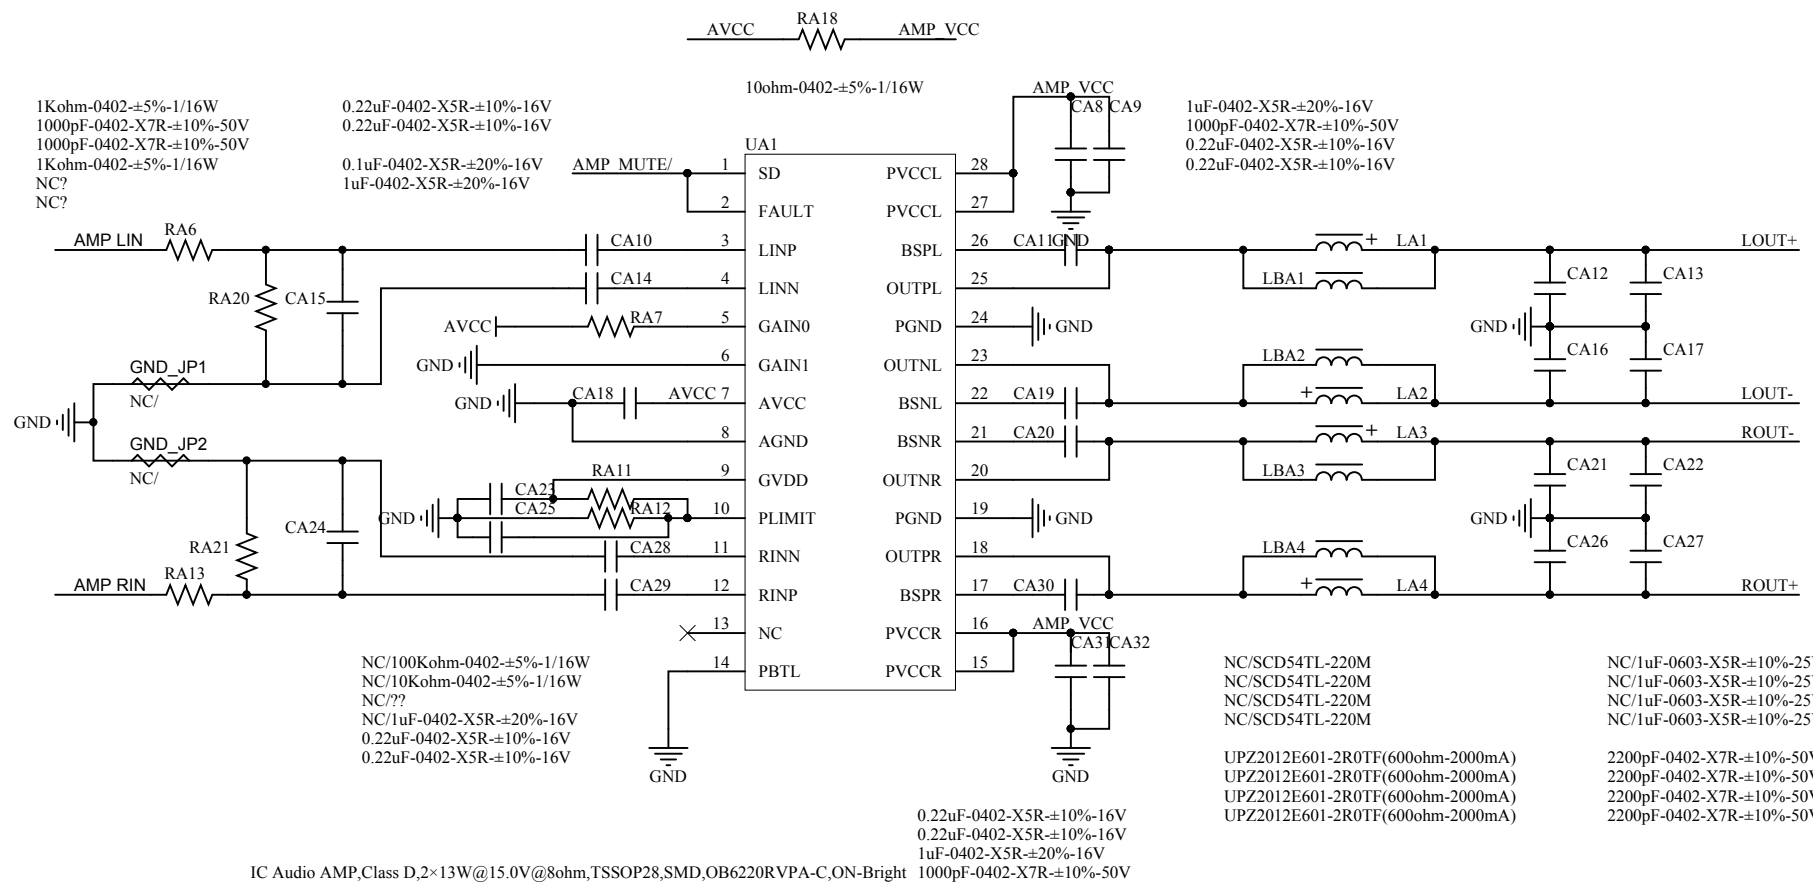


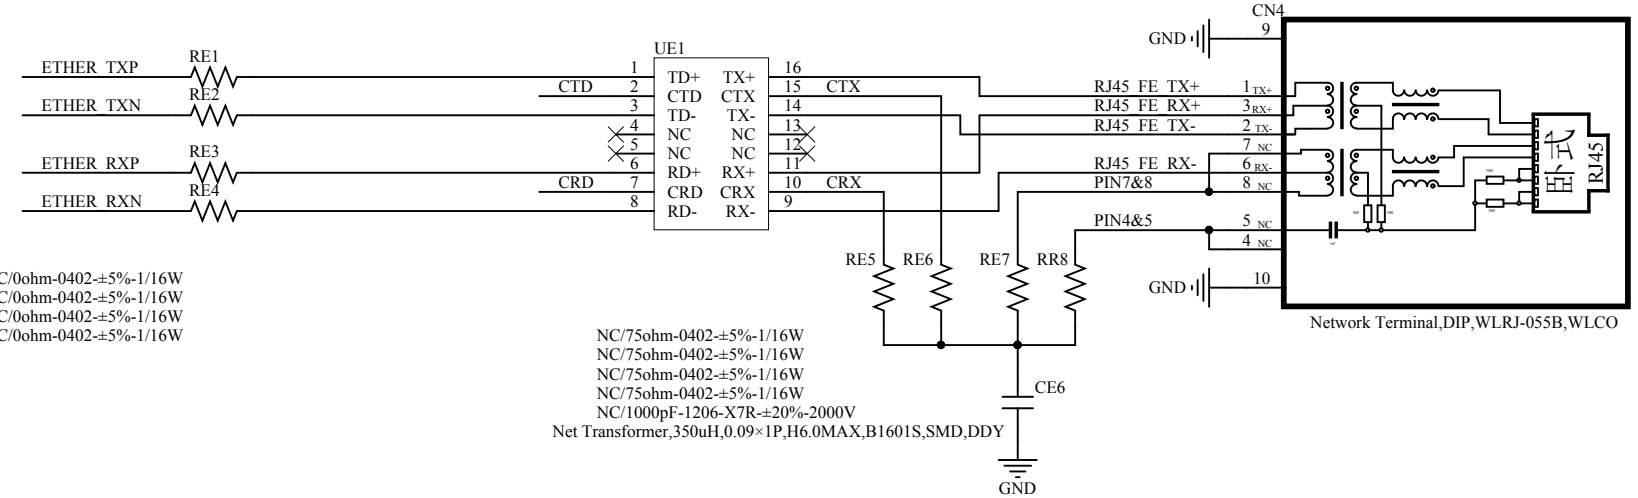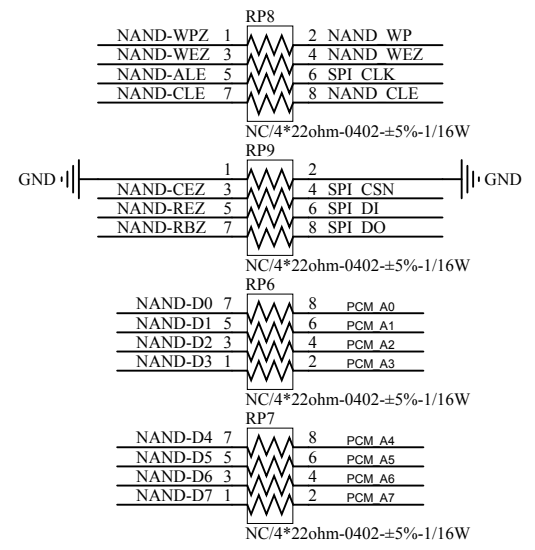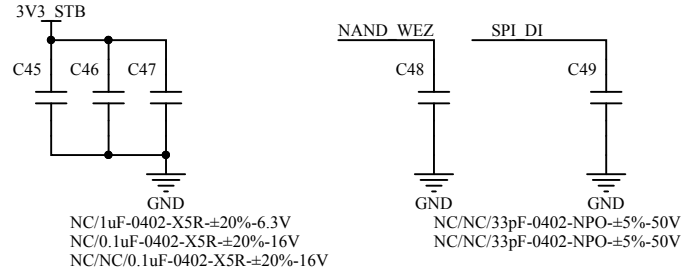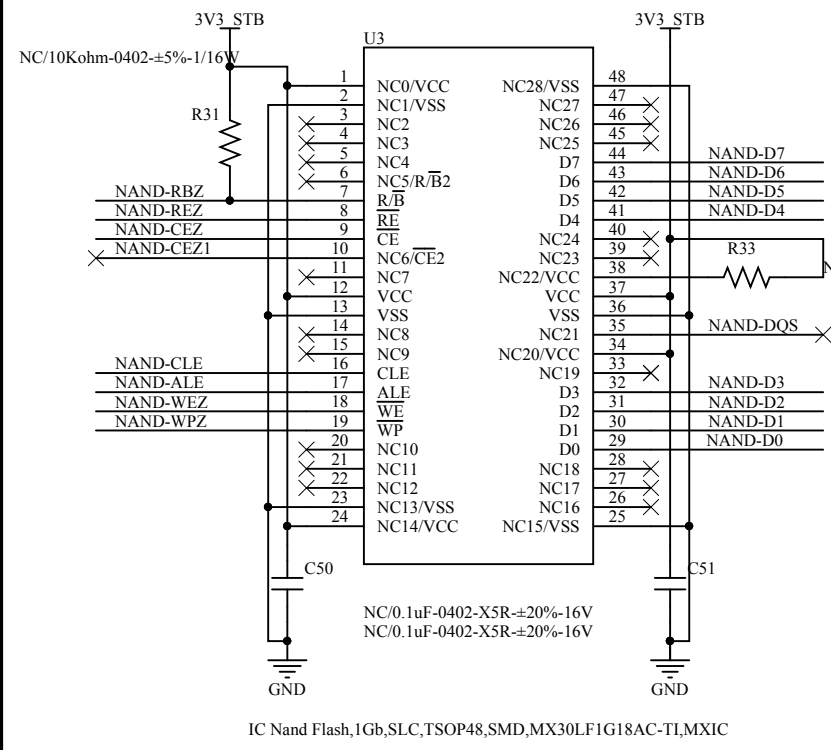


9. Styling Sheet

32" 4012 series

REV.	ECN.	NO.	APPD.	DATE

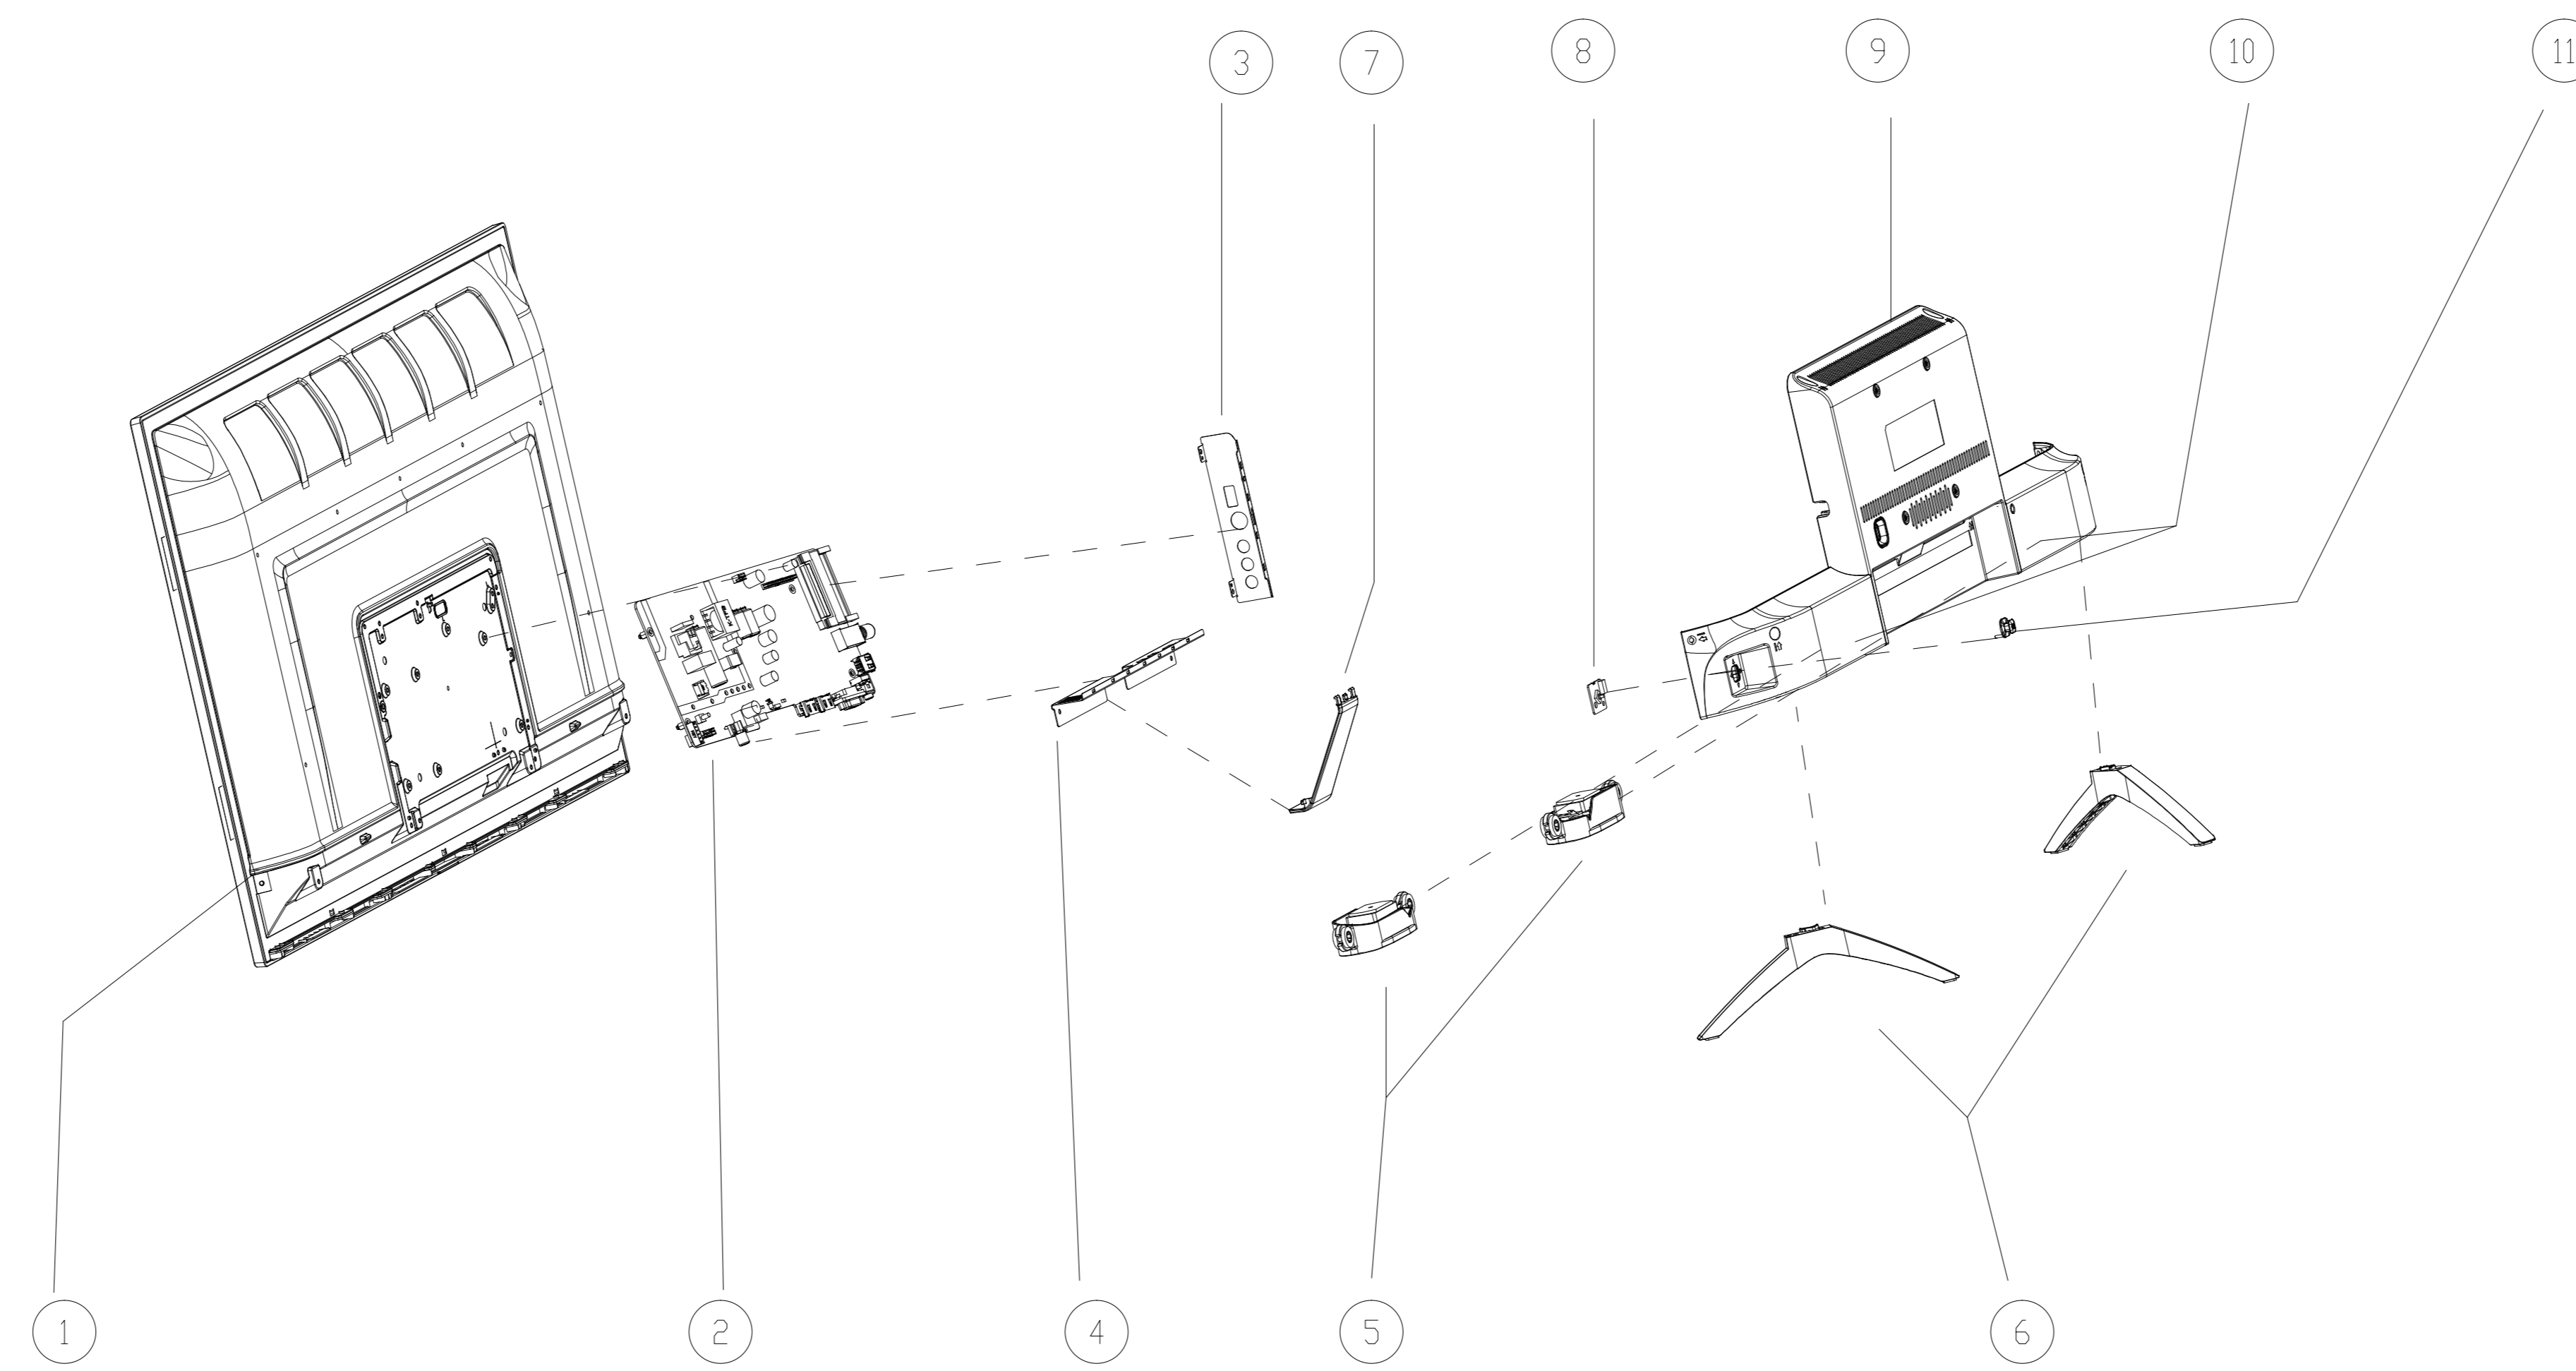

Module

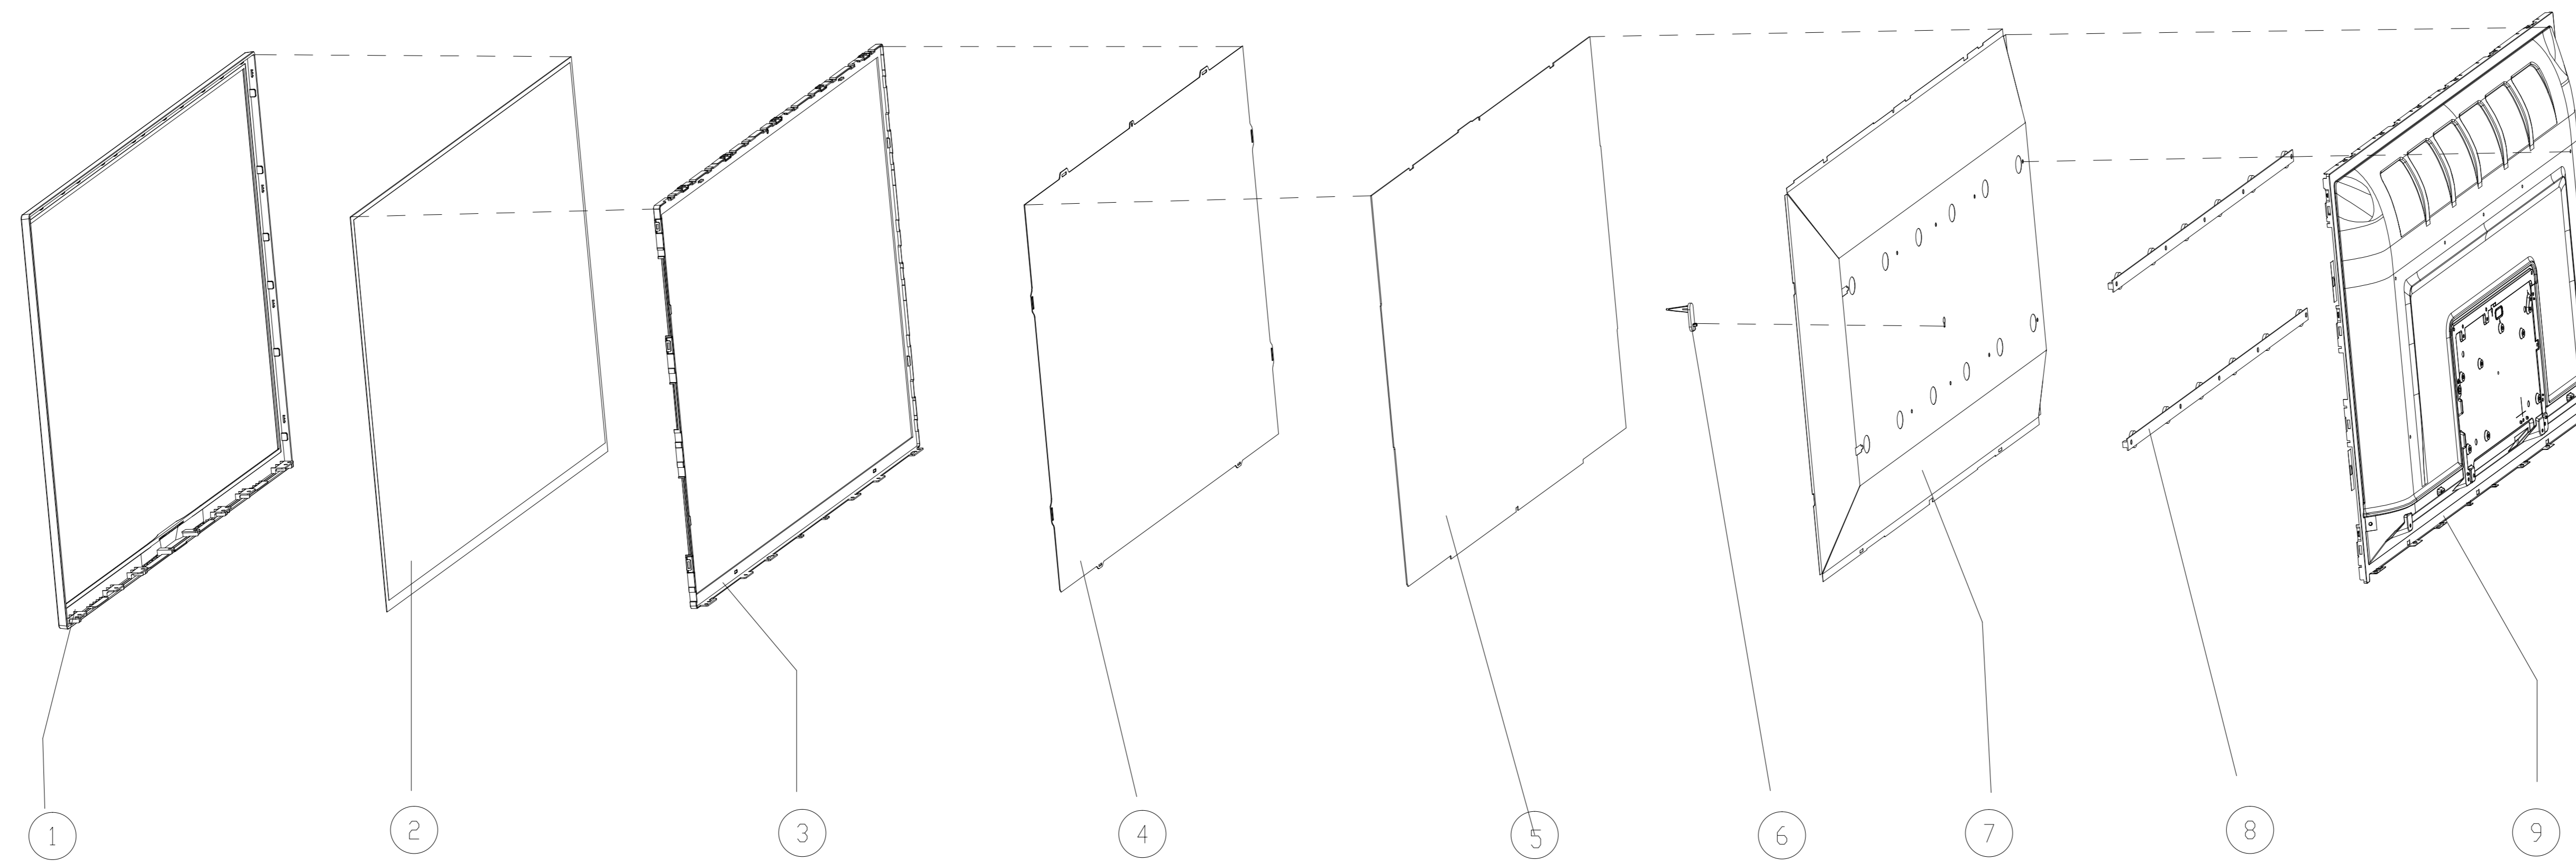

11	Button ary	70303200C144B11114	1			
10	Back cover L & R	70023200C104J0L014 70023200C104J0R014	1			
9	Back cover-M	7002320C1B04J0M004	1	9	Back plate	71Z2-320C1B-11050004
8	Key board	901411232C00001011	1	8	LCM light	7834-581120-04200011
7	Remote control recive windon	70343200K340041104	2	7	Reflector	7821-K32WDC-01502024
6	Base	70033200K324B00004 70033200K314B00004	1	6	Supporting bracket	/
5	Speaker	771125838A52000011	2	5	Diffusion	7823-K32WDC-0001Z011
4	Hardare baffle plate_down	71113200C142120104	1	4	Brightness Enhancement Film	7822-K32WDC-02800011
3	Hareware baffle plate_side	71113200C142120214	1	3	Mid frame	70Z1-3200C1-114B0014
2	Mainboard	901124T855AK3A1021	1	2	Glassboard	7432-320LG5-3300M191-F
1	Module (Panel)	7422320LGK3AK011-F	1	1	Suface frame	7001-3200K3-04BFLP14

X.± .200	X.*± 0.050	32C1 (配MS3463-PB755+BCAU-32) Explosive View	 深圳市康冠技术有限公司 SHENZHEN KTC TECHNOLOGY CO.,Ltd	
.X± .100	.X*± 0.010			
.XX± .01	.XX*± 0.005			
.XXX± .005	.XXX*± 0.002			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KANGTE COMPUTER CO. LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF KANGTE COMPUTER CO. LTD.		2017-07-15		
Q'TY	UNIT	SCALE	SHEET	REV.
	MM	1:1	1/1	A