

NJM4558/4559

The NJM4558/4559 integrated circuit are a dual high-gain operational amplifier internally compensated and constructed on a single silicon chip using an advanced epitaxial process.


Combining the features of the NJM741 with the close parameter matching and tracking of a dual device on a monolithic chip results in unique performance characteristics. Excellent channel separation allow the use of the dual device in single NJM741 operational amplifier applications providing density. It is especially well suited for applications in differential-in, differential-out as well as in potentiometric amplifiers and where gain and phase matched channels are mandatory.

2

■ Package Outline

■ Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Supply Voltage	V^+ / V^-	$\pm 18\text{V}$
Differential Input Voltage	V_{ID}	$\pm 30\text{V}$
Input Voltage (note)	V_I	$\pm 15\text{V}$
Power Dissipation	P_D (D-Type) (M,E-Type) (L-Type)	500mW 300mW 800mW
Operating Temperature Range	T_{opr}	$-20 \sim +75^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-40 \sim +125^\circ\text{C}$

NJM4558D
NJM4559DNJM4558M
NJM4559MNJM4558E
NJM4559ENJM4558L
NJM4559L



(note) For supply voltage less than $\pm 15\text{V}$, the absolute maximum input voltage is equal to the supply voltage.

■ Electrical Characteristics ($T_a=25^\circ\text{C}$, $V^+/V^- = \pm 15\text{V}$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	V_{IO}	$R_S \leq 10\text{k}\Omega$	—	0.5	6	mV
Input Offset Current	I_{IO}		—	5	200	nA
Input Bias Current	I_B		—	50	500	nA
Input Resistance	R_{IN}		0.3	5	—	MΩ
Large Signal Voltage Gain	A_V	$R_L \geq 2\text{k}\Omega$, $V_O = \pm 10\text{V}$	86	100	—	dB
Maximum Output Voltage Swing 1	V_{OM1}	$R_L \geq 10\text{k}\Omega$	± 12	± 14	—	V
Maximum Output Voltage Swing 2	V_{OM2}	$R_L \geq 2\text{k}\Omega$	± 10	± 13	—	V
Input Common Mode Voltage Range	V_{ICM}		± 12	± 14	—	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10\text{k}\Omega$	70	90	—	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10\text{k}\Omega$	76.5	90	—	dB
Supply Current	I_{CC}		—	3.5	5.7	mA
Slew Rate	SR		—	1	—	V/ μ s
NJM4558	SR		—	2	—	V/ μ s
NJM4559	SR		—	1.4	—	μ Vrms
Equivalent Input Noise Voltage	V_{NI}	RIAA, $R_S = 1\text{k}\Omega$, 30kHz LPF	—	—	—	—

■ Connection Diagram


■ Equivalent Circuit (1/2 Shown)

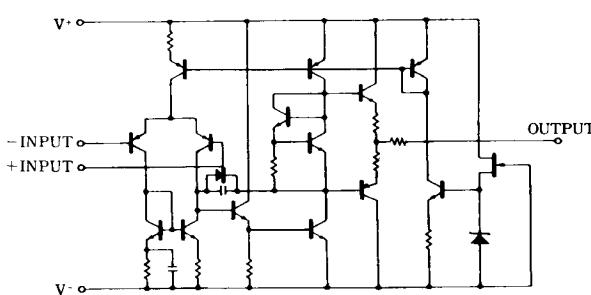

D.M,E-Type
(Top View)


PIN FUNCTION

- 1 . A OUTPUT
- 2 . A -INPUT
- 3 . A +INPUT
- 4 . V⁻
- 5 . B +INPUT
- 6 . B -INPUT
- 7 . B OUTPUT
- 8 . V⁺




■ Typical Characteristics


Input Bias Current vs. Ambient

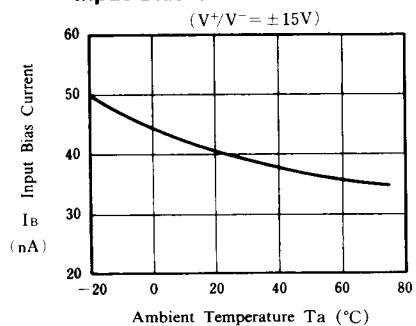


Maximum Output Voltage Swing vs. Supply Voltage

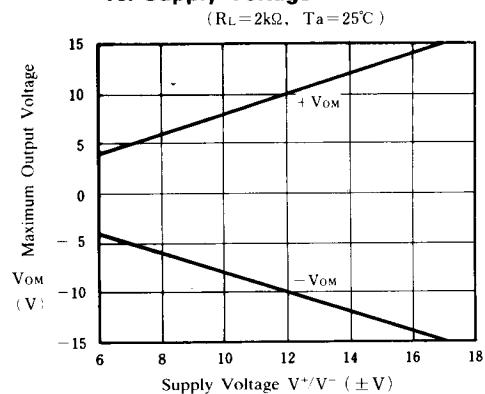


Maximum Output Voltage Swing vs. Load Resistance

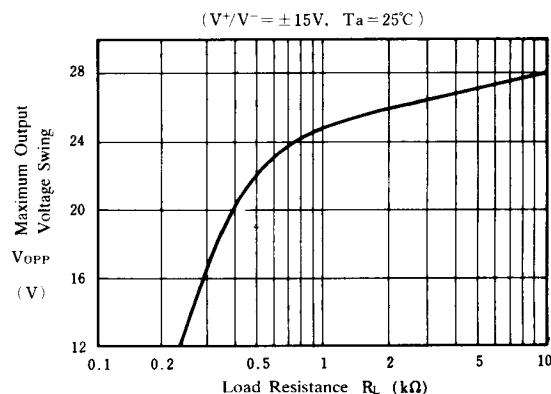

Equivalent Input Noise Voltage vs. Frequency

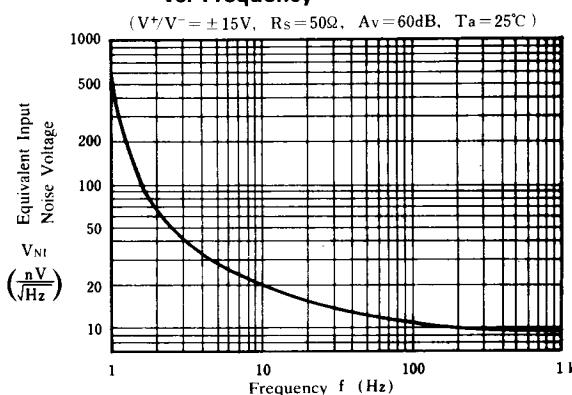

Open Loop Voltage Gain vs. Frequency

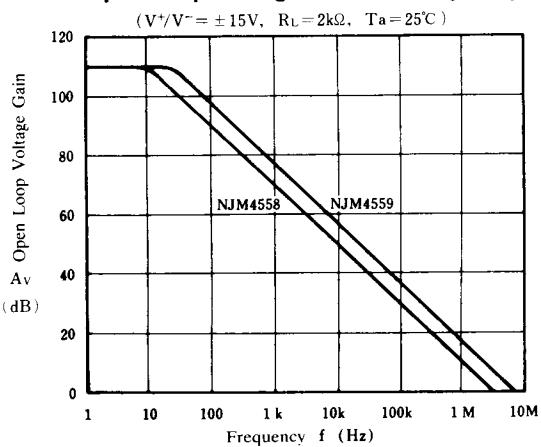

Maximum Output Voltage Swing vs. Frequency

