


Самовосстанавливающиеся предохранители серии JK30

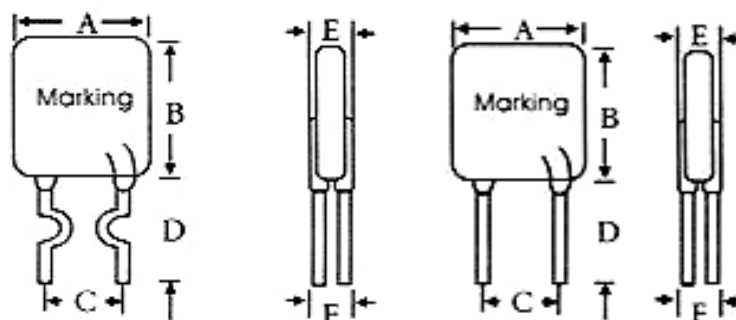

Электрические параметры (при температуре 25°C), габариты (в мм):

Модель	V _{max} , В	I _{max} , А	I _{ном.} , мА	R _{max} , Ом	R _{min} , Ом	Максимальные размеры, мм					
						A	B	C	D	E	F
JK30-090	30	40	0.90	0.12	0.070	7.4	12.2	5.10	7.6	3.0	0.9
JK30-110	30	40	1.10	0.10	0.050	7.4	14.2	5.10	7.6	3.0	0.9
JK30-135	30	40	1.35	0.08	0.040	8.9	13.5	5.10	7.6	3.0	0.9
JK30-160	30	40	1.60	0.07	0.030	8.9	15.2	5.10	7.6	3.0	0.9
JK30-185	30	40	1.85	0.06	0.030	10.2	15.7	5.10	7.6	3.0	0.9
JK30-250	30	40	2.50	0.04	0.020	11.4	18.3	5.10	7.6	3.0	0.9
JK30-300	30	40	3.00	0.05	0.020	11.4	17.3	5.10	7.6	3.0	1.2
JK30-400	30	40	4.00	0.03	0.010	14.0	20.1	5.10	7.6	3.0	1.2
JK30-500	30	40	5.00	0.03	0.010	14.0	24.9	10.2	7.6	3.0	1.2
JK30-600	30	40	6.00	0.02	0.005	16.5	24.9	10.2	7.6	3.0	1.2
JK30-700	30	40	7.00	0.02	0.005	19.1	26.7	10.2	7.6	3.0	1.2
JK30-800	30	40	8.00	0.02	0.005	21.6	29.2	10.2	7.6	3.0	1.2
JK30-900	30	40	9.00	0.01	0.005	24.1	29.7	10.2	7.6	3.0	1.2